


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

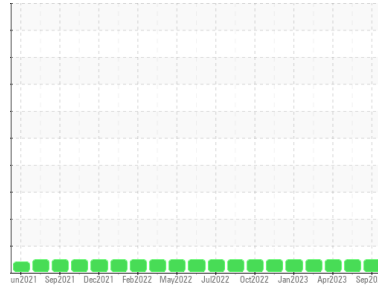

Area  
**Plymouth & Brockton**  
 Machine Id  
**434**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 40 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0083324</b>	PCA0090739	PCA0083358
Sample Date	Client Info		<b>09 Sep 2023</b>	21 Jun 2023	02 Apr 2023
Machine Age	mls	Client Info	<b>239389</b>	221590	198000
Oil Age	mls	Client Info	<b>24000</b>	24000	24000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>15</b>	18	7
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>3</b>	7	7
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>60</b>	63	59
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>1032</b>	893	939
Calcium	ppm	ASTM D5185m 3000	<b>1231</b>	1108	1093
Phosphorus	ppm	ASTM D5185m 1150	<b>1054</b>	987	994
Zinc	ppm	ASTM D5185m 1350	<b>1364</b>	1201	1250
Sulfur	ppm	ASTM D5185m 4250	<b>3875</b>	2849	3340

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	2
Sodium	ppm	ASTM D5185m >216	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>1.5</b>	1.8	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	9.4	6.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.7</b>	22.5	19.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	16.8	13.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.17</b>	8.74	10.44









# OIL ANALYSIS REPORT

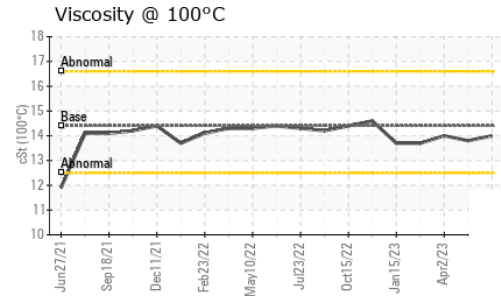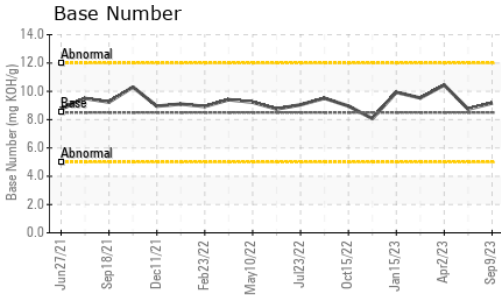

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	13.8

## GRAPHS

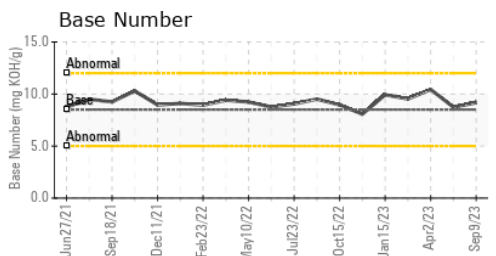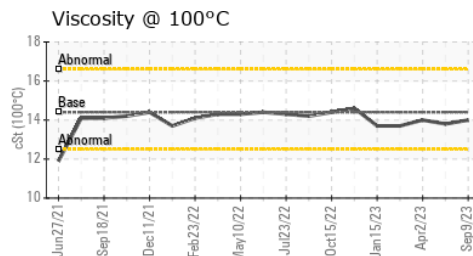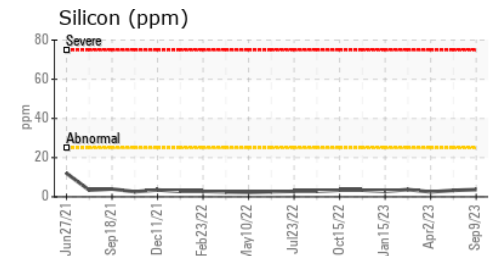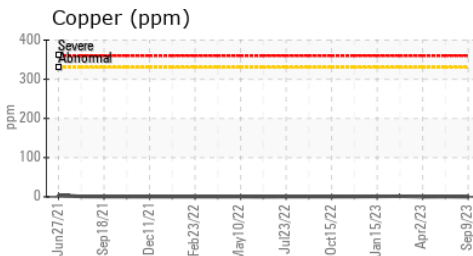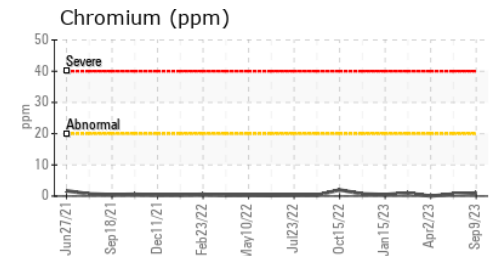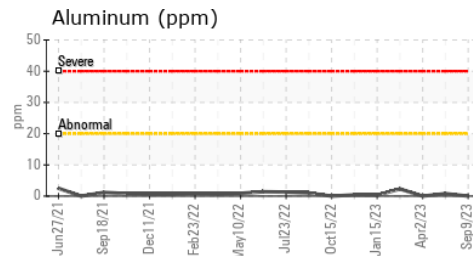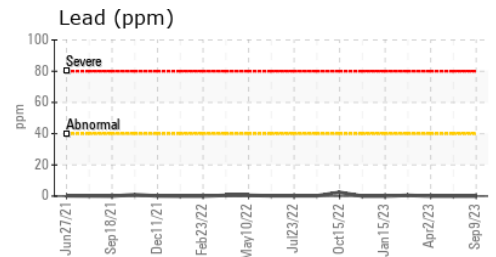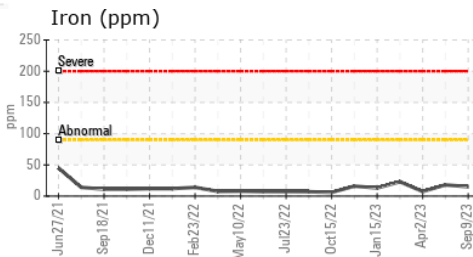

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0083324 **Received** : 14 Sep 2023  
**Lab Number** : 05951612 **Diagnosed** : 18 Sep 2023  
**Unique Number** : 10647571 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)