


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

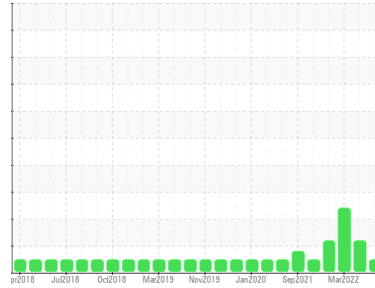

Area  
**Plymouth & Brockton**  
Machine Id  
**11421**

Component  
**Diesel Engine**  
Fluid

**PETRO CANADA DURON SHP 15W40 (39 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0090646</b>	PCA0090508	PCA0059636
Sample Date	Client Info		<b>09 Sep 2023</b>	01 Jun 2023	09 Mar 2022
Machine Age	mls	Client Info	<b>462621</b>	455661	352473
Oil Age	mls	Client Info	<b>6000</b>	24000	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	0.0	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>28</b>	89	52
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	9	4
Lead	ppm	ASTM D5185m >150	<b>0</b>	4	1
Copper	ppm	ASTM D5185m >90	<b>2</b>	16	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	13	16
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	61	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1012</b>	865	930
Calcium	ppm	ASTM D5185m 1070	<b>1224</b>	1165	1155
Phosphorus	ppm	ASTM D5185m 1150	<b>1086</b>	960	1078
Zinc	ppm	ASTM D5185m 1270	<b>1364</b>	1139	1201
Sulfur	ppm	ASTM D5185m 2060	<b>3996</b>	3114	2941

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>6</b>	15	10
Sodium	ppm	ASTM D5185m	<b>26</b>	▲ 184	▲ 459
Potassium	ppm	ASTM D5185m >20	<b>2</b>	17	▲ 54



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.4</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.4</b>	11.4	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	22.3	21.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	18.7	17.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.35</b>	8.81	9.61









# OIL ANALYSIS REPORT

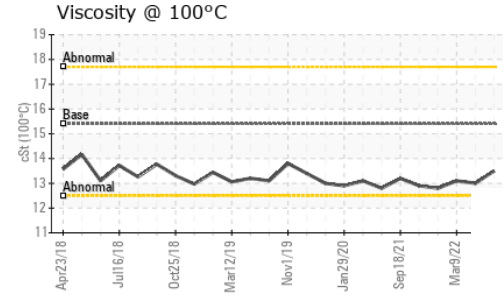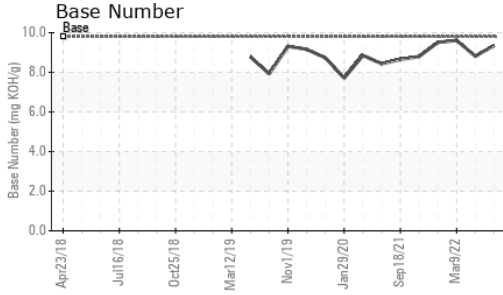

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.0

## GRAPHS

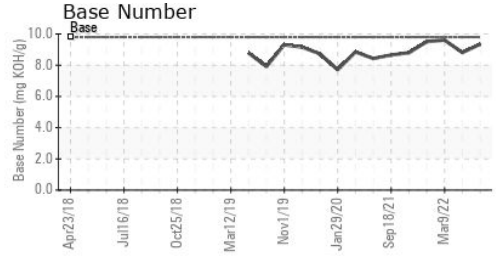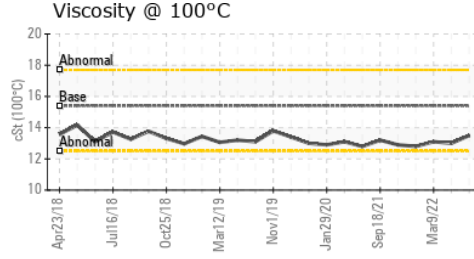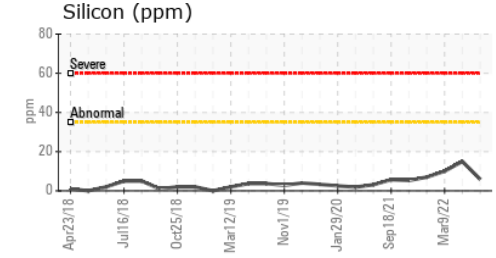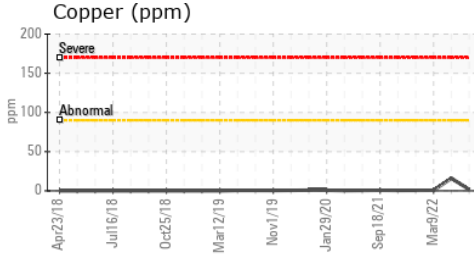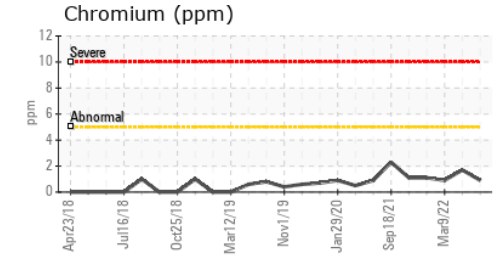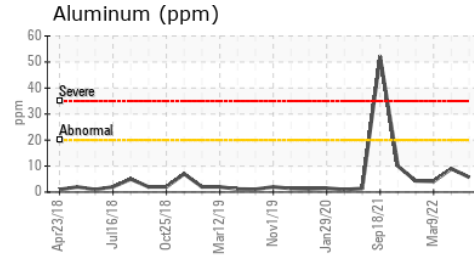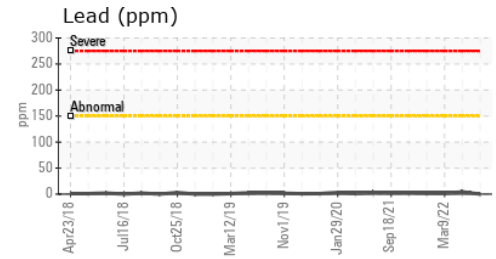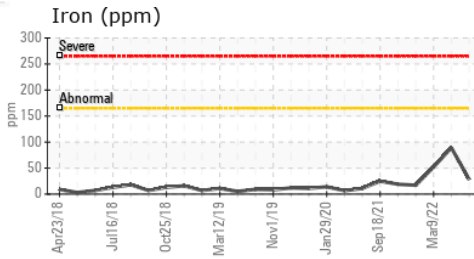

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : PCA0090646 Received : 14 Sep 2023  
 Lab Number : 05951613 Diagnosed : 18 Sep 2023  
 Unique Number : 10647572 Diagnostician : Wes Davis  
 Test Package : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)