




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**413108**  
 Component  
**Transmission**  
 Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

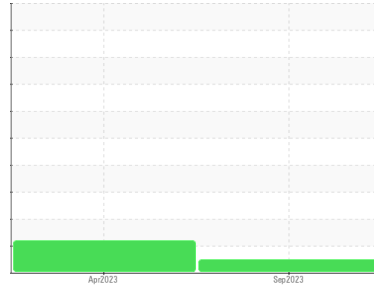

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0090728</b>	GFL0070413	---
Sample Date	Client Info	<b>11 Sep 2023</b>	06 Apr 2023	---
Machine Age	hrs Client Info	<b>2425</b>	1204	---
Oil Age	hrs Client Info	<b>2425</b>	1204	---
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	---
Sample Status		<b>NORMAL</b>	ABNORMAL	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >320	<b>49</b>	59	---
Chromium ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Nickel ppm	ASTM D5185m >5	<b>1</b>	<1	---
Titanium ppm	ASTM D5185m	<b>0</b>	0	---
Silver ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum ppm	ASTM D5185m >50	<b>26</b>	15	---
Lead ppm	ASTM D5185m >65	<b>2</b>	4	---
Copper ppm	ASTM D5185m >95	<b>8</b>	16	---
Tin ppm	ASTM D5185m >6	<b>5</b>	4	---
Vanadium ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	<b>83</b>	55	---
Barium ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Molybdenum ppm	ASTM D5185m	<b>0</b>	2	---
Manganese ppm	ASTM D5185m	<b>1</b>	2	---
Magnesium ppm	ASTM D5185m	<b>2</b>	<1	---
Calcium ppm	ASTM D5185m	<b>64</b>	117	---
Phosphorus ppm	ASTM D5185m	<b>289</b>	198	---
Zinc ppm	ASTM D5185m	<b>0</b>	4	---
Sulfur ppm	ASTM D5185m	<b>1323</b>	1584	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >65	<b>3</b>	6	---
Sodium ppm	ASTM D5185m	<b>6</b>	4	---
Potassium ppm	ASTM D5185m >20	<b>4</b>	4	---

## VISUAL


method	limit/base	current	history1	history2
White Metal scalar	*Visual NONE	<b>NONE</b>	▲ MODER	---
Yellow Metal scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water scalar	*Visual >0.1	<b>NEG</b>	NEG	---
Free Water scalar	*Visual	<b>NEG</b>	NEG	---

## FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C cSt	ASTM D445 34	<b>35.2</b>	54.3	---






# OIL ANALYSIS REPORT

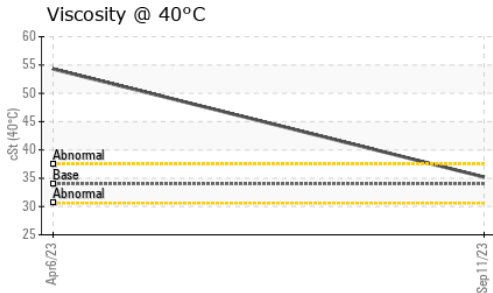

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

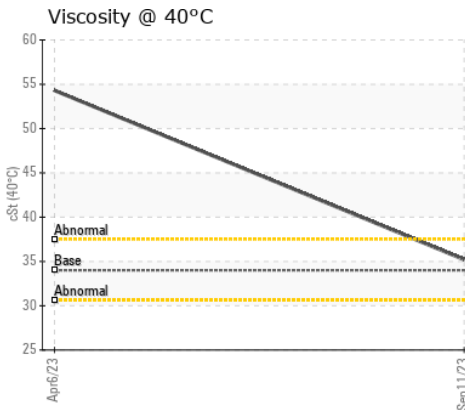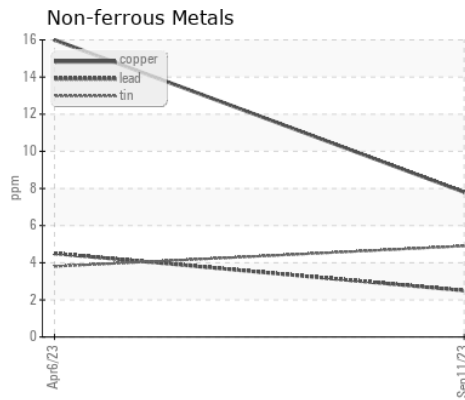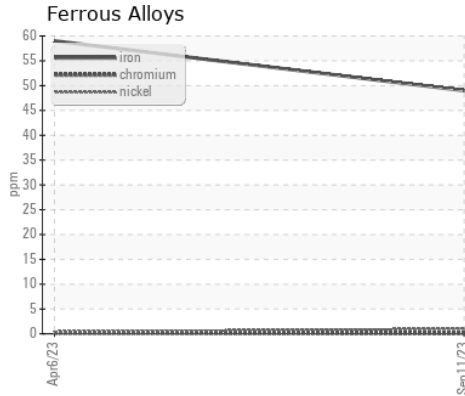

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090728  
**Lab Number** : 05951842  
**Unique Number** : 10647801  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)