




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

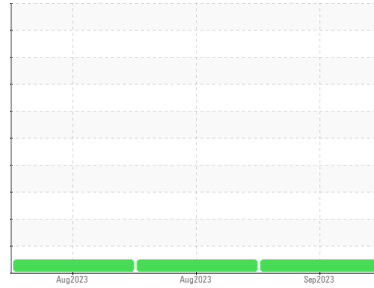

Area
{UNASSIGNED}
Machine Id
933045
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088753	GFL0088740	GFL0088788
Sample Date	Client Info		05 Sep 2023	16 Aug 2023	01 Aug 2023
Machine Age	hrs	Client Info	690	517	347
Oil Age	hrs	Client Info	690	517	347
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >220	41	43	30
Chromium	ppm	ASTM D5185m >2	0	0	0
Nickel	ppm	ASTM D5185m >5	<1	<1	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >5	0	<1	0
Aluminum	ppm	ASTM D5185m >75	11	9	5
Lead	ppm	ASTM D5185m >95	0	<1	<1
Copper	ppm	ASTM D5185m >60	8	9	6
Tin	ppm	ASTM D5185m >10	2	1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	52	71	69
Barium	ppm	ASTM D5185m	1	3	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1
Manganese	ppm	ASTM D5185m	1	1	1
Magnesium	ppm	ASTM D5185m	2	1	<1
Calcium	ppm	ASTM D5185m	129	151	125
Phosphorus	ppm	ASTM D5185m	219	250	203
Zinc	ppm	ASTM D5185m	24	30	21
Sulfur	ppm	ASTM D5185m	2053	2774	1852

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	6	4
Sodium	ppm	ASTM D5185m	7	1	3
Potassium	ppm	ASTM D5185m >20	2	4	3

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 34	32.8	32.8	32.7






OIL ANALYSIS REPORT

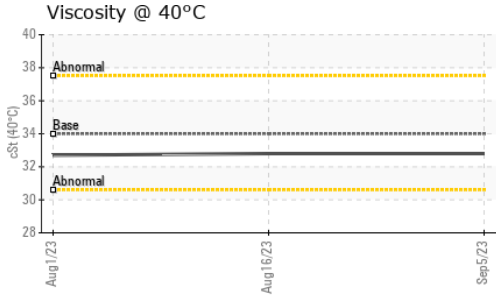

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

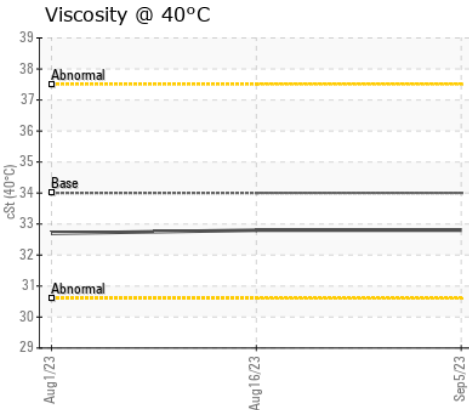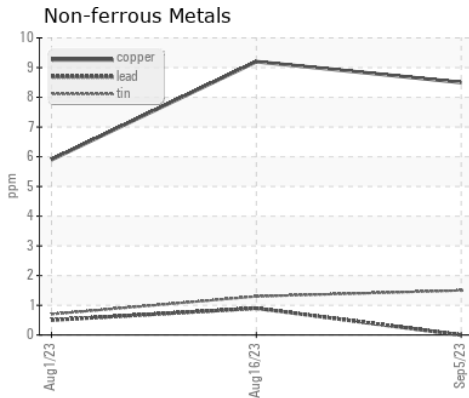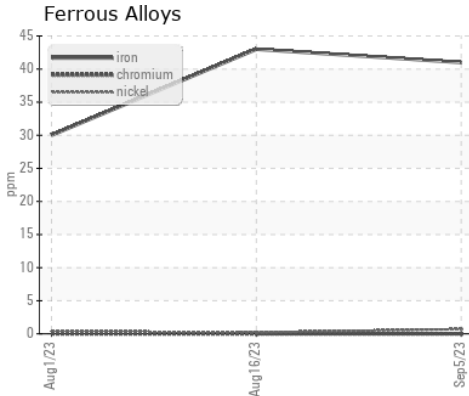

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0088753
Lab Number : 05951854
Unique Number : 10647813
Test Package : FLEET

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: