

Rear Differential

NOT GIVEN (--- QTS)

Component

PROBLEM SUMMARY

NOT GIVEN PCA0101097 (S/N NO INFO ON SIF/BOTTLE)

Sample Rating Trend **VIS DEBRIS**

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

COMPONENT CONDITION SUMMARY

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL		
Debris	scalar	*Visual	NONE	A HEAVY		

Customer Id: PERLEWNC Sample No.: PCA0101097 Lab Number: 05951856 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

NOT GIVEN PCA0101097 (S/N NO INFO ON SIF/BOTTLE) Component

Rear Differential

Wear

the oil.

service.

NOT GIVEN (--- QTS)

DIAGNOSIS SAMPLE INFORMATION method limit/base current history1 history2 PCA0101097 Sample Number **Client Info** Recommendation No corrective action is recommended at this time. 13 Sep 2023 Sample Date Client Info Resample at the next service interval to monitor. Client Info 0 Machine Age mls Oil Age mls Client Info 0 All component wear rates are normal. Oil Changed N/A **Client Info** Sample Status ABNORMAL Contamination High concentration of visible dirt/debris present in WEAR METALS method limit/base current history1 history2 >500 Iron ppm ASTM D5185m 191 Fluid Condition Chromium ASTM D5185m >10 ppm 1 The condition of the oil is acceptable for the time in Nickel ppm ASTM D5185m >10 11 Titanium ASTM D5185m 0 ppm Silver ppm ASTM D5185m 0 Aluminum ASTM D5185m >25 4 ppm Lead ASTM D5185m >25 0 ppm ASTM D5185m >100 Copper ppm <1 Tin ppm ASTM D5185m >10 1 Vanadium ASTM D5185m 0 ppm Cadmium ppm ASTM D5185m 0 **ADDITIVES** limit/base current history2 method history1 297 Boron ppm ASTM D5185m Barium ppm ASTM D5185m <1 Molybdenum 0 ppm ASTM D5185m Manganese ppm ASTM D5185m 13 ASTM D5185m 3 Magnesium ppm 13 Calcium ASTM D5185m ppm Phosphorus ppm ASTM D5185m 1416 Zinc ASTM D5185m 18 ppm Sulfur ppm ASTM D5185m 28159 CONTAMINANTS method limit/base current history1 history2 Silicon ASTM D5185m >75 50 ppm Sodium ppm ASTM D5185m 8 ppm Potassium ASTM D5185m >20 1 VISUAL method limit/base current history1 history2 White Metal scalar *Visual NONE NONE Yellow Metal *Visual NONE NONE scalar Precipitate scalar *Visual NONE NONE *Visual NONE NONE Silt scalar Debris scalar *Visual NONE HEAVY Sand/Dirt scalar *Visual NONE NONE Appearance *Visual NORML NORML scalar Odor NORML NORML scalar *Visual

Visc @ 40°C Report Id: PERLEWNC [WUSCAR] 05951856 (Generated: 09/20/2023 06:14:04) Rev: 1

method ASTM D445

*Visual

*Visual

>.2

limit/base

scalar

scalar

cSt

Emulsified Water

FLUID PROPERTIES

Free Water

107 Contact/Location: NELSON WALLACE - PERLEWNC

history1

NEG


NEG

current

history2



OIL ANALYSIS REPORT

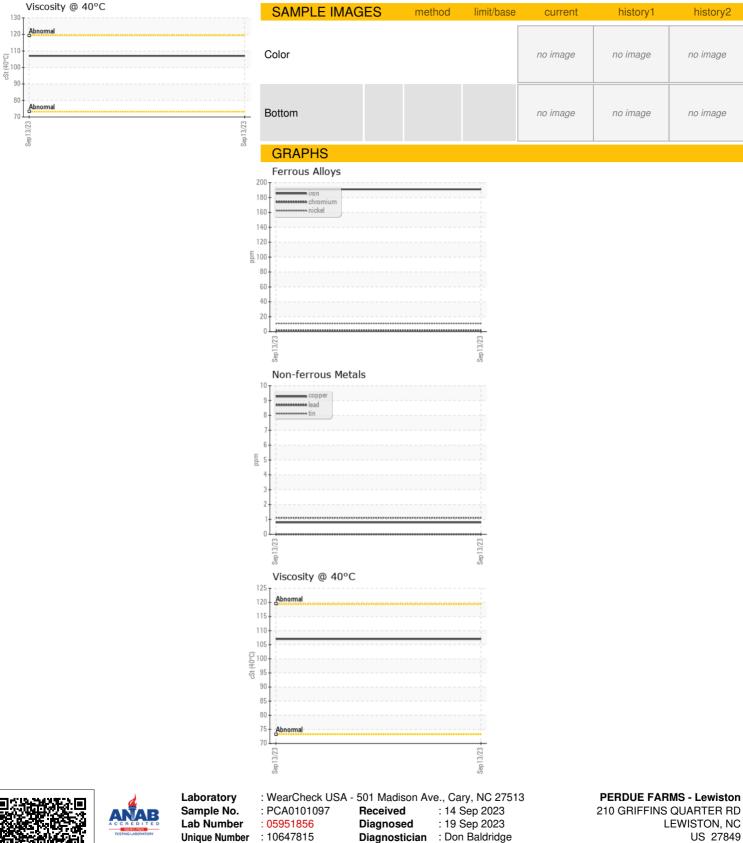

 Certificate L2367
 Test Package
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 *

 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PERLEWNC [WUSCAR] 05951856 (Generated: 09/20/2023 06:14:04) Rev: 1

Contact/Location: NELSON WALLACE - PERLEWNC

Т:

F:

Contact: NELSON WALLACE

nelson.wallace2@perdue.com