




OIL ANALYSIS REPORT

Sample Rating Trend

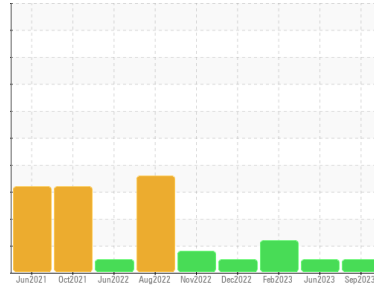

NORMAL



Machine Id
921008-553

Component
Diesel Engine

Fluid
CHEVRON DELO 400 XLE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0064436	GFL0064380	GFL0064357	
Sample Date	Client Info	11 Sep 2023	19 Jun 2023	15 Feb 2023	
Machine Age	hrs	Client Info	5801	5799	5798
Oil Age	hrs	Client Info	382	0	0
Oil Changed	Client Info	Not Chngd	N/A	Changed	
Sample Status		NORMAL	NORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	0.6	▲ 7.1
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	27	9	12
Chromium	ppm	ASTM D5185m >20	2	0	<1
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m	8	6	10
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	3	3	3
Lead	ppm	ASTM D5185m >40	3	0	0
Copper	ppm	ASTM D5185m >330	2	0	3
Tin	ppm	ASTM D5185m >15	1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	159	209	128
Barium	ppm	ASTM D5185m	0	4	0
Molybdenum	ppm	ASTM D5185m	79	67	49
Manganese	ppm	ASTM D5185m	1	0	<1
Magnesium	ppm	ASTM D5185m	725	592	565
Calcium	ppm	ASTM D5185m	1685	1334	1341
Phosphorus	ppm	ASTM D5185m 760	743	595	632
Zinc	ppm	ASTM D5185m 830	873	739	755
Sulfur	ppm	ASTM D5185m 2770	3310	2874	2504

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	14	6	7
Sodium	ppm	ASTM D5185m	6	2	3
Potassium	ppm	ASTM D5185m >20	6	2	2

INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	1.6	0.4	1.5
Nitration	Abs/cm	*ASTM D7624 >20	10.9	6.1	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.6	20.7	21.3

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.8	14.8	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	8.4	9.1	9.3







OIL ANALYSIS REPORT

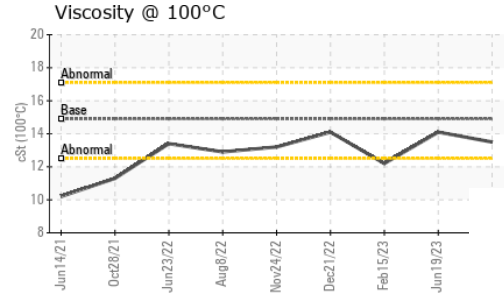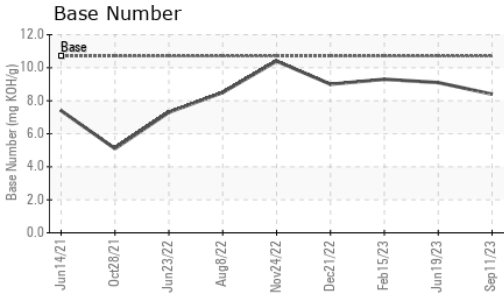

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	13.5	14.1 ▲ 12.2

GRAPHS

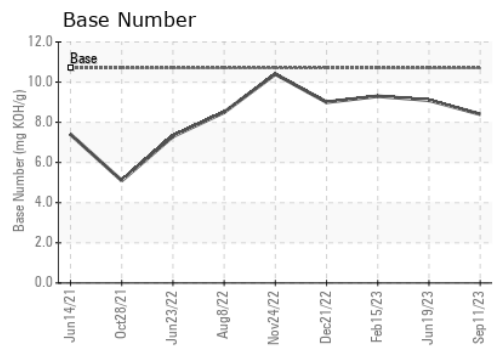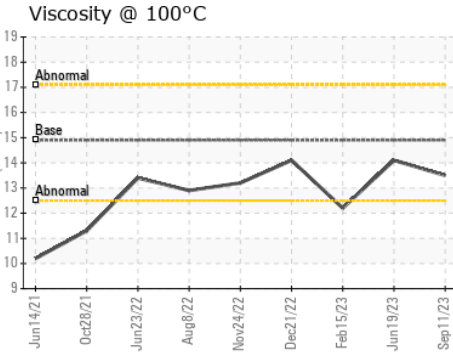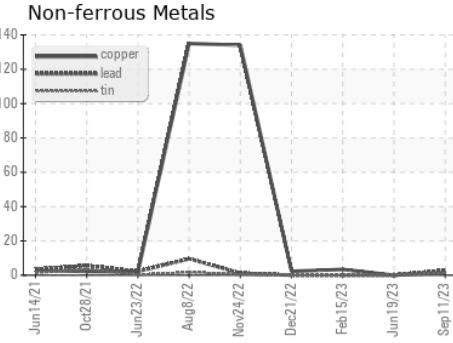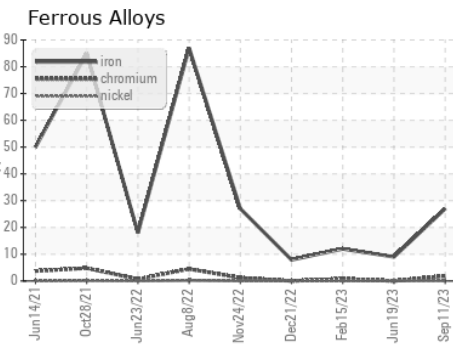

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0064436 **Received** : 14 Sep 2023
Lab Number : 05952039 **Diagnosed** : 18 Sep 2023
Unique Number : 10647998 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 624 - Elmira Hauling
 10164 M-32
 Elmira, MI
 US 49730
 Contact: KEITH CAMPBELL
 kcampbell@gflenv.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)