




# OIL ANALYSIS REPORT

Sample Rating Trend

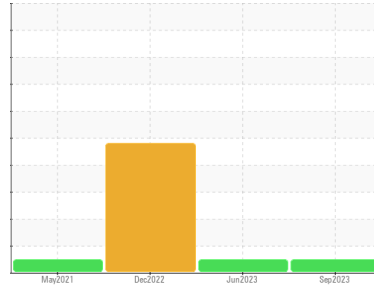

**NORMAL**



Machine Id  
**2223M**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092948</b>	GFL0015782	GFL0067627
Sample Date	Client Info		<b>11 Sep 2023</b>	28 Jun 2023	27 Dec 2022
Machine Age	hrs	Client Info	<b>28378</b>	215	0
Oil Age	hrs	Client Info	<b>215</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>39</b>	31	5
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	0
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	2	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	2	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	2	0
Lead	ppm	ASTM D5185m >40	<b>3</b>	5	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	4	<1
Tin	ppm	ASTM D5185m >15	<b>2</b>	2	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	2	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	4	97
Barium	ppm	ASTM D5185m 0	<b>44</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	54	62
Manganese	ppm	ASTM D5185m 0	<b>1</b>	2	0
Magnesium	ppm	ASTM D5185m 1010	<b>891</b>	928	875
Calcium	ppm	ASTM D5185m 1070	<b>1009</b>	1075	1092
Phosphorus	ppm	ASTM D5185m 1150	<b>940</b>	957	1009
Zinc	ppm	ASTM D5185m 1270	<b>1165</b>	1193	1176
Sulfur	ppm	ASTM D5185m 2060	<b>3153</b>	3460	3639

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	183
Sodium	ppm	ASTM D5185m	<b>8</b>	8	2
Potassium	ppm	ASTM D5185m >20	<b>5</b>	7	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.1</b>	0.6	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	8.2	4.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.4</b>	20.7	17.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.4</b>	17.1	13.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.2</b>	9.2	9.6







# OIL ANALYSIS REPORT

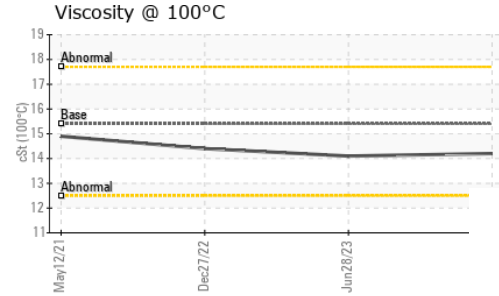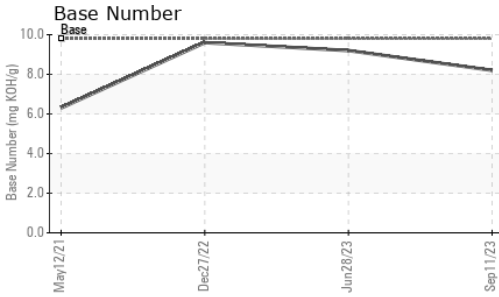

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.1	14.4

## GRAPHS

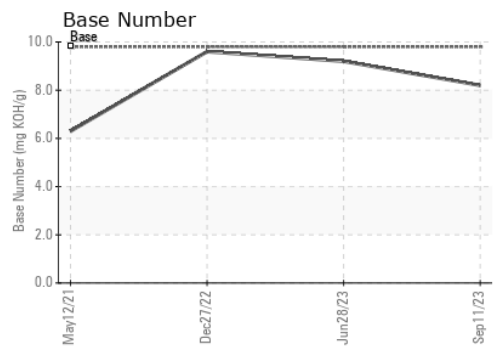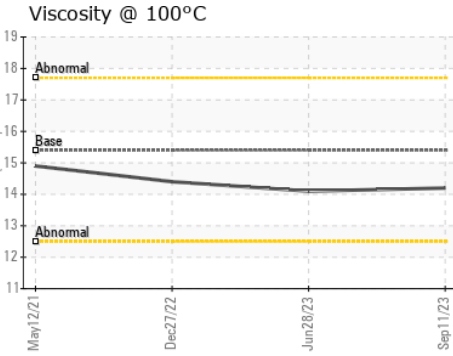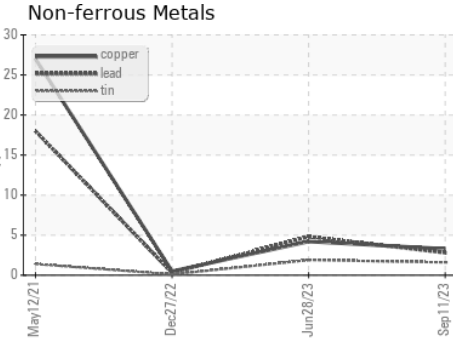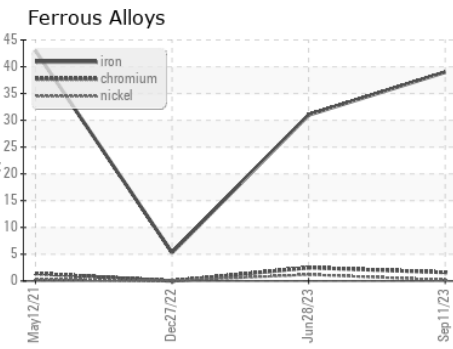

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092948 **Received** : 15 Sep 2023  
**Lab Number** : **05952491** **Diagnosed** : 18 Sep 2023  
**Unique Number** : 10648450 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: Chris Gee  
 cgee@gflenv.com  
 T: (231)597-8553  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)