




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Machine Id  
**158M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

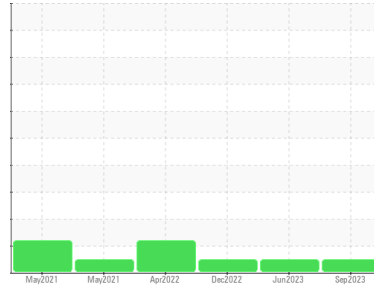

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0092939</b>	GFL0015783	GFL0067619
Sample Date	Client Info	<b>12 Sep 2023</b>	28 Jun 2023	27 Dec 2022
Machine Age	hrs	<b>20889</b>	20849	422732
Oil Age	hrs	<b>422732</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>12</b>	7	11
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	<1
Nickel	ppm ASTM D5185m >5	<b>1</b>	1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	2	0
Silver	ppm ASTM D5185m >2	<b>0</b>	2	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	2	1
Lead	ppm ASTM D5185m >40	<b>2</b>	4	<1
Copper	ppm ASTM D5185m >330	<b>4</b>	3	3
Tin	ppm ASTM D5185m >15	<b>2</b>	2	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	2	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>13</b>	2	87
Barium	ppm ASTM D5185m 0	<b>44</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	51	62
Manganese	ppm ASTM D5185m 0	<b>1</b>	2	<1
Magnesium	ppm ASTM D5185m 1010	<b>848</b>	913	860
Calcium	ppm ASTM D5185m 1070	<b>956</b>	1038	1092
Phosphorus	ppm ASTM D5185m 1150	<b>866</b>	921	956
Zinc	ppm ASTM D5185m 1270	<b>1088</b>	1166	1152
Sulfur	ppm ASTM D5185m 2060	<b>2840</b>	3375	3305

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	5	6
Sodium	ppm ASTM D5185m	<b>4</b>	4	4
Potassium	ppm ASTM D5185m >20	<b>3</b>	6	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>8.2</b>	6.7	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.2</b>	18.4	18.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.7</b>	14.3	15.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.3</b>	9.0	8.0







# OIL ANALYSIS REPORT

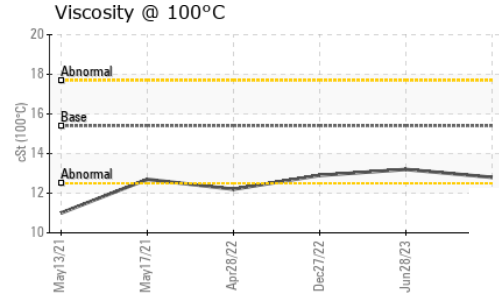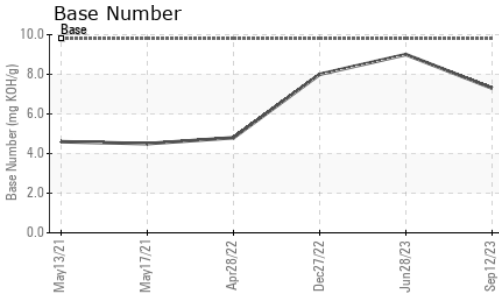

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	13.2	12.9

## GRAPHS

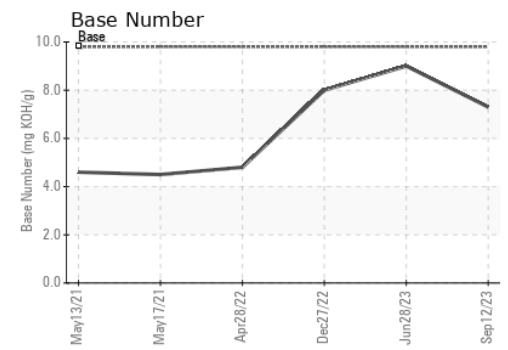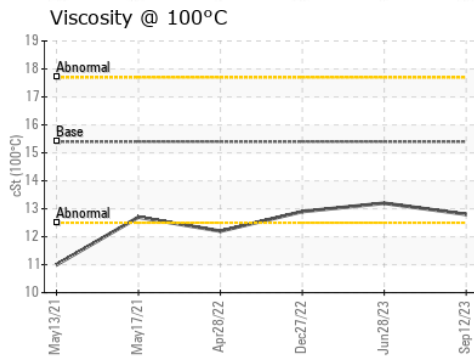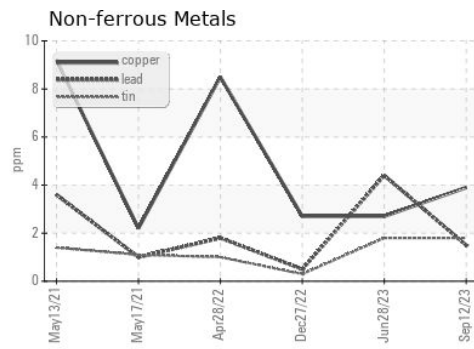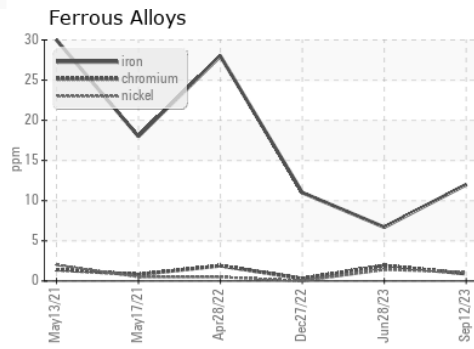

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092939 **Received** : 15 Sep 2023  
**Lab Number** : **05952527** **Diagnosed** : 18 Sep 2023  
**Unique Number** : 10648486 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: Chris Gee  
 cgee@gflenv.com  
 T: (231)597-8553  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)