




# OIL ANALYSIS REPORT

Sample Rating Trend

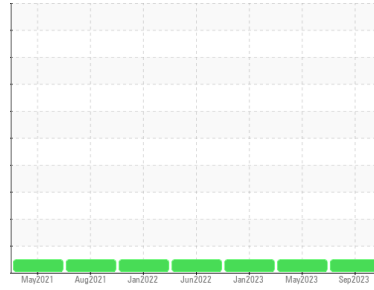

**NORMAL**



Machine Id  
**425019-707**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0064425</b>	GFL0064493	GFL0064397
Sample Date	Client Info	<b>11 Sep 2023</b>	22 May 2023	04 Jan 2023
Machine Age	hrs	<b>18400</b>	17987	17908
Oil Age	hrs	<b>472</b>	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>23</b>	16	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>3</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>5</b>	3	1
Lead	ppm ASTM D5185m >40	<b>14</b>	6	3
Copper	ppm ASTM D5185m >330	<b>4</b>	1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>118</b>	231	232
Barium	ppm ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm ASTM D5185m	<b>113</b>	118	115
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m	<b>679</b>	558	476
Calcium	ppm ASTM D5185m	<b>2011</b>	1689	1711
Phosphorus	ppm ASTM D5185m 760	<b>823</b>	794	757
Zinc	ppm ASTM D5185m 830	<b>1033</b>	955	905
Sulfur	ppm ASTM D5185m 2770	<b>3651</b>	3357	2515

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	8	4
Sodium	ppm ASTM D5185m	<b>4</b>	2	0
Potassium	ppm ASTM D5185m >20	<b>4</b>	2	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>11.9</b>	9.7	9.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.9</b>	23.9	22.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.3</b>	18.3	16.9
Base Number (BN)	mg KOH/g ASTM D2896 10.7	<b>6.8</b>	8.1	8.5







# OIL ANALYSIS REPORT

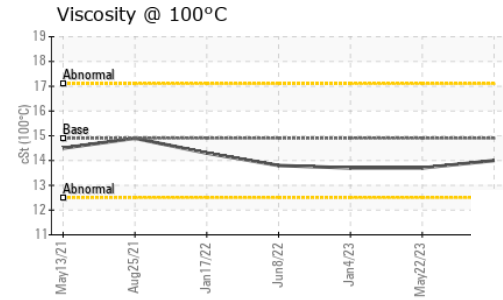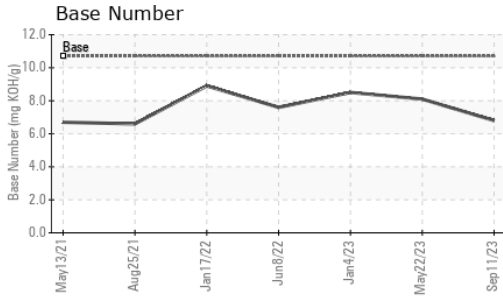

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	14.0	13.7

## GRAPHS

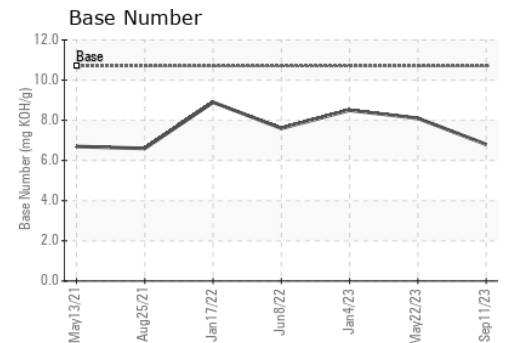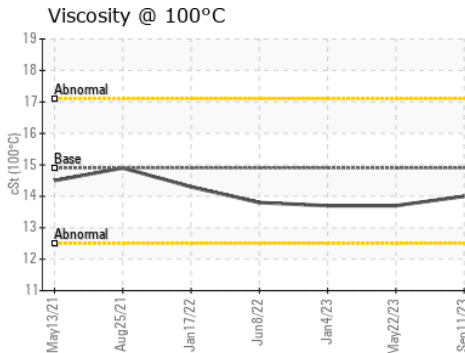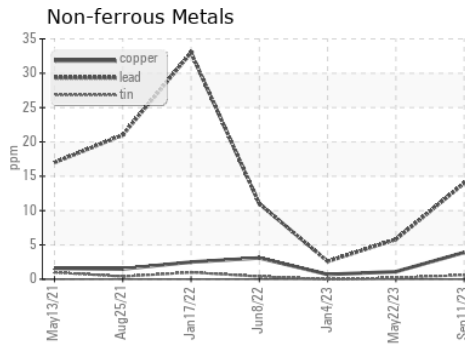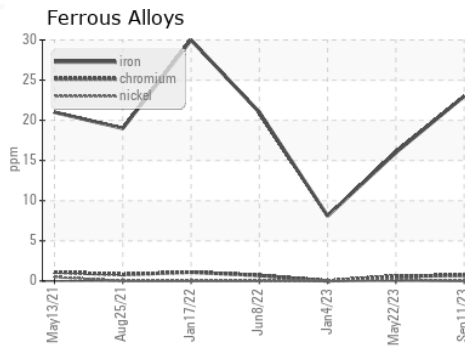

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064425 **Received** : 15 Sep 2023  
**Lab Number** : 05953307 **Diagnosed** : 19 Sep 2023  
**Unique Number** : 10649266 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 624 - Elmira Hauling**  
 10164 M-32  
 Elmira, MI  
 US 49730  
 Contact: KEITH CAMPBELL  
 kcampbell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: