




# OIL ANALYSIS REPORT

Sample Rating Trend

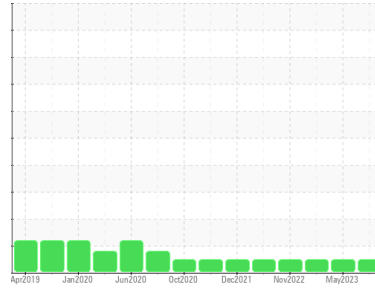

**NORMAL**



Machine Id  
**828058-101262**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0081473</b>	GFL0081480	GFL0059530
Sample Date	Client Info		<b>07 Aug 2023</b>	08 May 2023	06 Mar 2023
Machine Age	hrs	Client Info	<b>12326</b>	11731	11385
Oil Age	hrs	Client Info	<b>650</b>	650	650
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>36</b>	15	23
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	3	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	4	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	61	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1105</b>	961	863
Calcium	ppm	ASTM D5185m 1070	<b>1227</b>	1013	1032
Phosphorus	ppm	ASTM D5185m 1150	<b>1096</b>	1039	956
Zinc	ppm	ASTM D5185m 1270	<b>1398</b>	1274	1172
Sulfur	ppm	ASTM D5185m 2060	<b>3775</b>	3715	2803

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	6	6
Sodium	ppm	ASTM D5185m	<b>11</b>	6	3
Potassium	ppm	ASTM D5185m >20	<b>4</b>	4	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	7.6	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	19.0	20.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.4</b>	15.2	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.6</b>	8.7	7.6







# OIL ANALYSIS REPORT

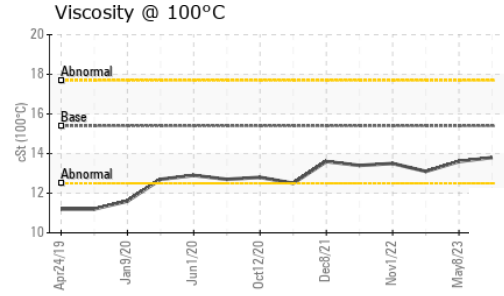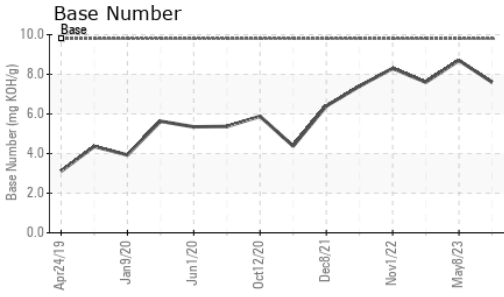

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.6	13.1

## GRAPHS

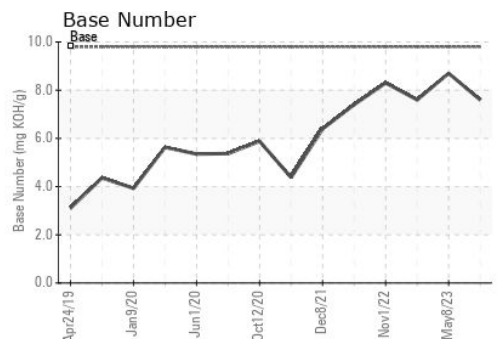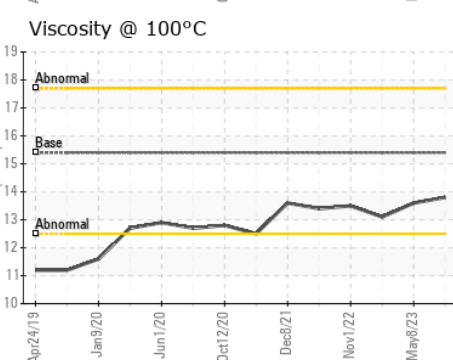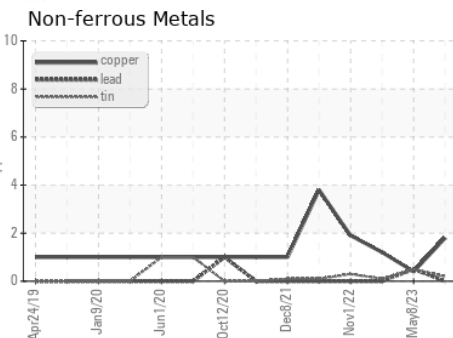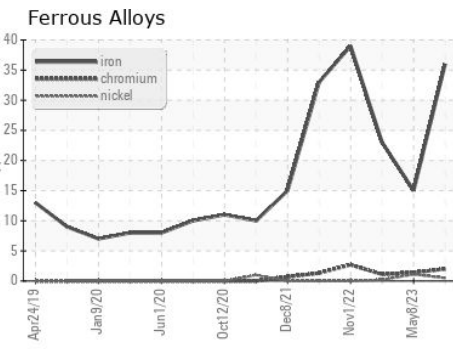

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0081473 **Received** : 18 Sep 2023  
**Lab Number** : **05953576** **Diagnosed** : 20 Sep 2023  
**Unique Number** : 10649535 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 893 - OK East Hauling**  
 2100 Lilly Street  
 Seminole, OK  
 US 74868  
 Contact: Roger Barlow  
 rbarlow@gflenv.com  
 T: (405)204-6183  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)