

# **OIL ANALYSIS REPORT**

### Sample Rating Trend



# WOLVO TRACTOR 26468 (S/N BM152516)

PETRO CANADA DURON SHP 10W30 (46 QTS)

# **Diesel Engine**

## DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the

### **Fluid Condition**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

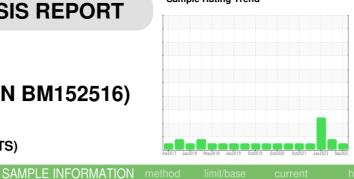

Sample Number		Client Info		PCA0104016	PCA0099011	PCA0089396
Sample Date		Client Info		14 Sep 2023	07 Jun 2023	25 Jan 2023
Machine Age	mls	Client Info		459332	445858	440426
Oil Age	mls	Client Info		13474	22551	0
Oil Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	MARGINAL	SEVERE
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>6.0	<1.0	<b>▲</b> 3.8	19.8
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	13	10	3
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>2	1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	<1	0
Lead	ppm	ASTM D5185m	>40	2	<1	<1
Copper	ppm	ASTM D5185m	>330	2	<1	0
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	5	60	<1
Barium	ppm	ASTM D5185m	0	3	0	0
Molybdenum	ppm	ASTM D5185m	50	64	57	47
Manganese	ppm	ASTM D5185m	0	<1	<1	0
Magnesium	ppm	ASTM D5185m	950	952	493	734
Calcium	ppm	ASTM D5185m	1050	1295	1624	902
Phosphorus	ppm	ASTM D5185m	995	1086	888	796
Zinc	ppm	ASTM D5185m	1180	1299	1108	943
Sulfur	ppm	ASTM D5185m	2600	3097	3460	2766
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	6	5
Sodium	ppm	ASTM D5185m		10	4	2
Potassium	ppm	ASTM D5185m	>20	2	4	<1
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.6	7.0	5.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	19.4	16.1
FLUID DEGRA	OATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.9	15.8	11.7
Base Number (BN)	mg KOH/g	ASTM D2896		5.9	8.5	8.4




# **OIL ANALYSIS REPORT**

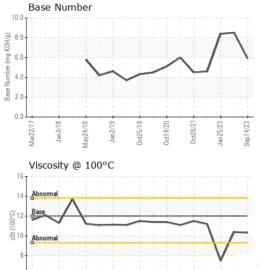



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPE	RHES	method			history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.3	10.4	<b>△</b> 7.5

## **GRAPHS**







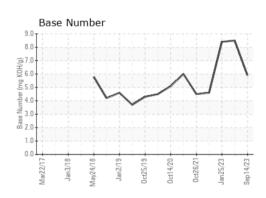





Certificate L2367

Laboratory Sample No. Lab Number Test Package : FLEET

Unique Number : 10654969

: PCA0104016 : 05953756

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 18 Sep 2023 Diagnosed Diagnostician : Wes Davis

: 19 Sep 2023

**PERDUE FARMS - Lewiston** 210 GRIFFINS QUARTER RD LEWISTON, NC US 27849

Contact: NELSON WALLACE nelson.wallace2@perdue.com T:

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: