


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

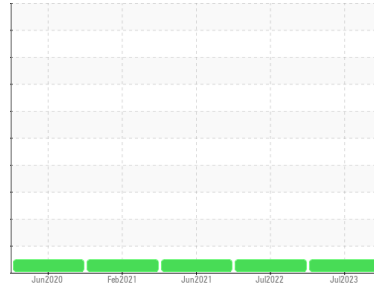

Machine Id

**6**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0053915</b>	PCA0054219	PCA0030468
Sample Date	Client Info	<b>28 Jul 2023</b>	16 Jul 2022	23 Jun 2021
Machine Age	mls Client Info	<b>156456</b>	106897	83238
Oil Age	mls Client Info	<b>20000</b>	20000	20000
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>10</b>	10	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>3</b>	4	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	<1
Copper	ppm ASTM D5185m >330	<b>3</b>	4	3
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	5	7
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	59	57
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>961</b>	923	912
Calcium	ppm ASTM D5185m 1070	<b>1180</b>	1059	1245
Phosphorus	ppm ASTM D5185m 1150	<b>1039</b>	940	1070
Zinc	ppm ASTM D5185m 1270	<b>1307</b>	1174	1174
Sulfur	ppm ASTM D5185m 2060	<b>3247</b>	2588	2470

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>11</b>	10	6
Sodium	ppm ASTM D5185m	<b>2</b>	2	0
Potassium	ppm ASTM D5185m >20	<b>2</b>	3	1



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>9.4</b>	9.9	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.8</b>	23.3	21.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.6</b>	20.5	18.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.52</b>	7.46	8.18









# OIL ANALYSIS REPORT

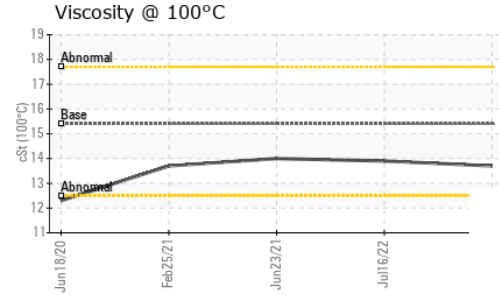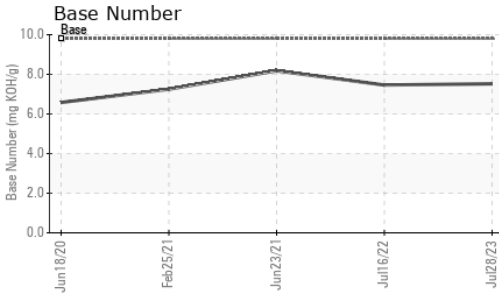

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.9	14.0

## GRAPHS

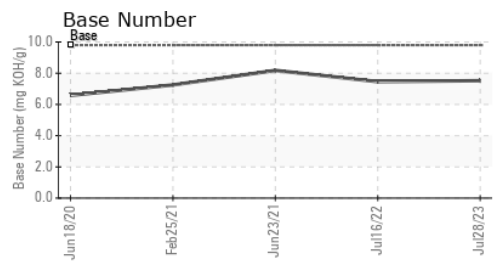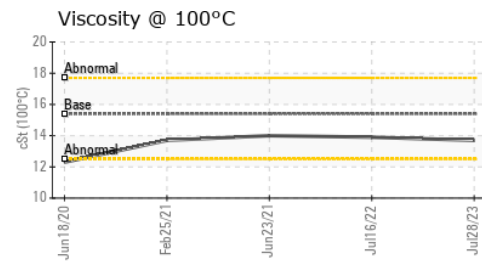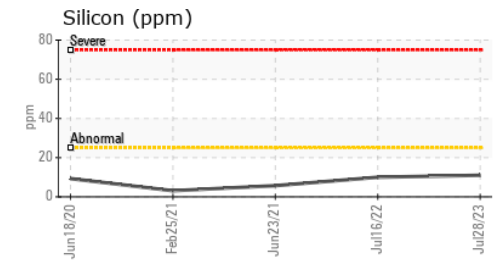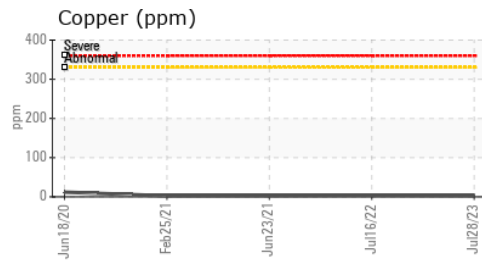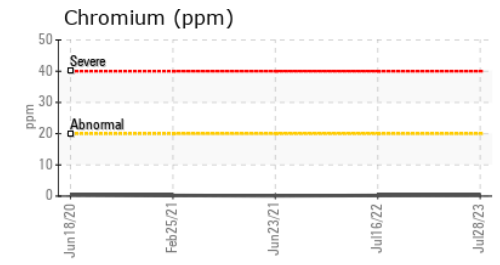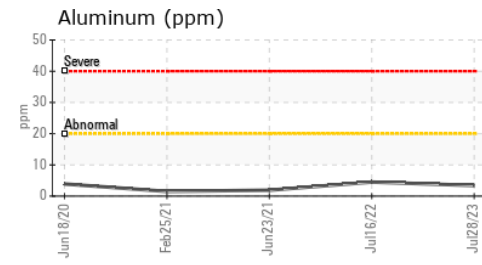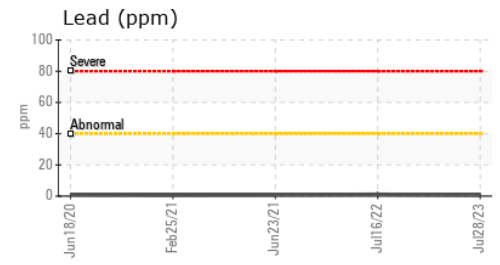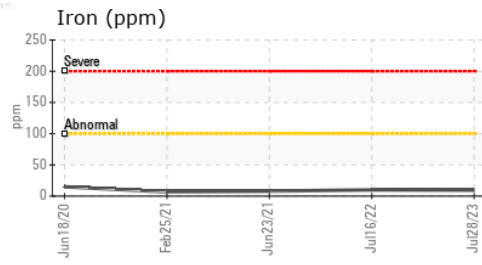

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0053915 **Received** : 18 Sep 2023  
**Lab Number** : **05954198** **Diagnosed** : 20 Sep 2023  
**Unique Number** : 10655411 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**B & B HARVESTING**  
 2842 LADD RD  
 MODESTO, CA  
 US 95356  
 Contact: Service Manager  
 drcalvalley@gmail.com  
 T: (209)545-8300  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)