




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

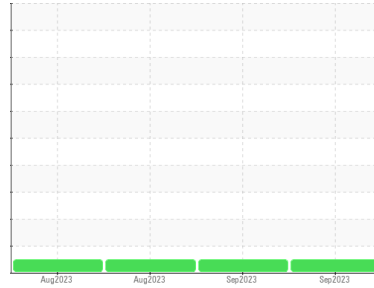

Area
{UNASSIGNED}
Machine Id
933045
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0094351	GFL0088753	GFL0088740	
Sample Date	Client Info	15 Sep 2023	05 Sep 2023	16 Aug 2023	
Machine Age	hrs	Client Info	811	690	517
Oil Age	hrs	Client Info	811	690	517
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd	
Sample Status		NORMAL	NORMAL	NORMAL	

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >220	44	41	43
Chromium	ppm	ASTM D5185m >2	0	0	0
Nickel	ppm	ASTM D5185m >5	0	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >5	0	0	<1
Aluminum	ppm	ASTM D5185m >75	10	11	9
Lead	ppm	ASTM D5185m >95	<1	0	<1
Copper	ppm	ASTM D5185m >60	10	8	9
Tin	ppm	ASTM D5185m >10	1	2	1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	52	52	71
Barium	ppm	ASTM D5185m	0	1	3
Molybdenum	ppm	ASTM D5185m	<1	0	<1
Manganese	ppm	ASTM D5185m	2	1	1
Magnesium	ppm	ASTM D5185m	0	2	1
Calcium	ppm	ASTM D5185m	135	129	151
Phosphorus	ppm	ASTM D5185m	221	219	250
Zinc	ppm	ASTM D5185m	0	24	30
Sulfur	ppm	ASTM D5185m	2032	2053	2774

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	4	4	6
Sodium	ppm	ASTM D5185m	7	7	1
Potassium	ppm	ASTM D5185m >20	3	2	4

VISUAL


method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445 34	32.6	32.8	32.8






OIL ANALYSIS REPORT

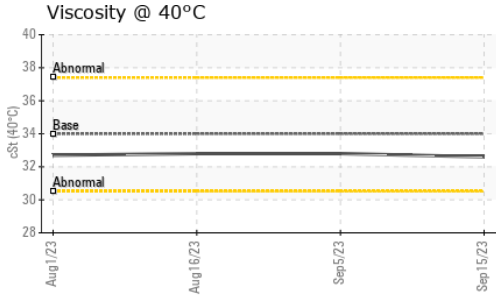

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

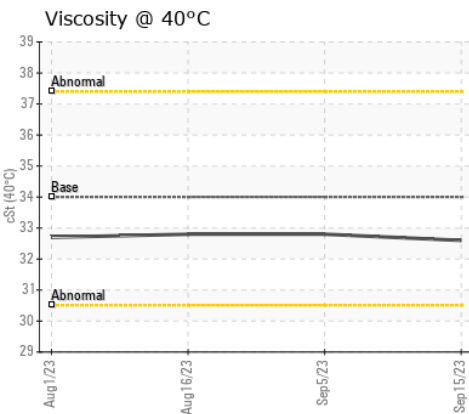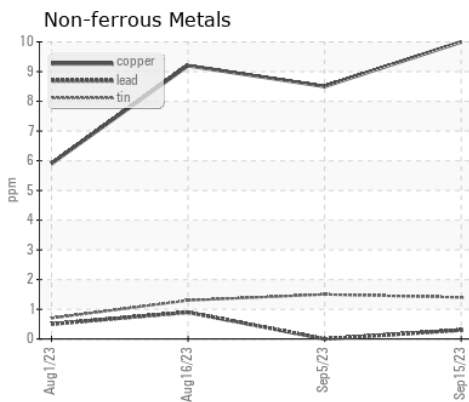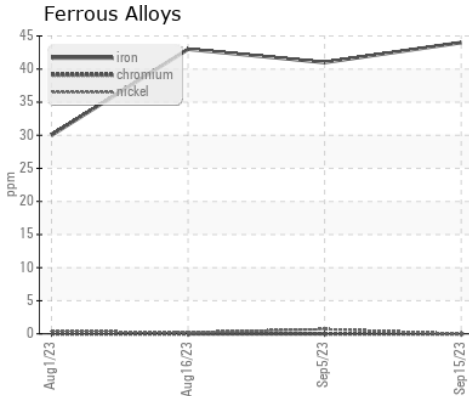

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0094351 **Received** : 18 Sep 2023
Lab Number : 05954458 **Diagnosed** : 20 Sep 2023
Unique Number : 10655671 **Diagnostician** : Jonathan Hester
Test Package : FLEET

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)