


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

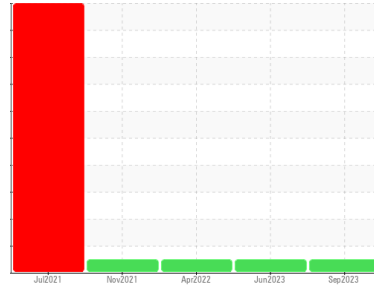

Machine Id  
**212078**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105301</b>	PCA0100771	PCA0067673
Sample Date	Client Info		<b>01 Sep 2023</b>	26 Jun 2023	04 Apr 2022
Machine Age	mls	Client Info	<b>161214</b>	150596	78351
Oil Age	mls	Client Info	<b>161214</b>	15225	15500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>15</b>	23	40
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>1</b>	6	1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	6	28
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	3
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>8</b>	10	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>63</b>	53	54
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>937</b>	893	861
Calcium	ppm	ASTM D5185m 1050	<b>1177</b>	1176	1205
Phosphorus	ppm	ASTM D5185m 995	<b>1067</b>	998	962
Zinc	ppm	ASTM D5185m 1180	<b>1287</b>	1248	1195
Sulfur	ppm	ASTM D5185m 2600	<b>3504</b>	3544	2573

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	7
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>4</b>	6	40



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	11.3	11.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	22.8	20.8

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.2</b>	22.2	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.8</b>	7.4	9.7









# OIL ANALYSIS REPORT

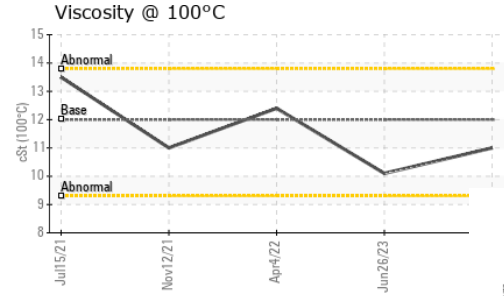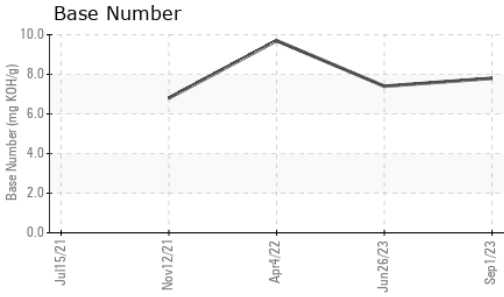

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	10.1	12.4

## GRAPHS

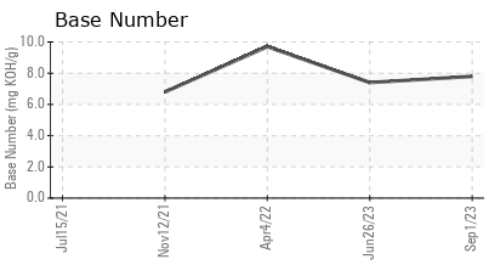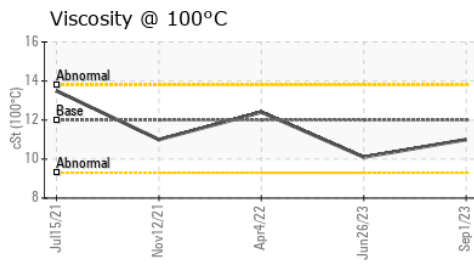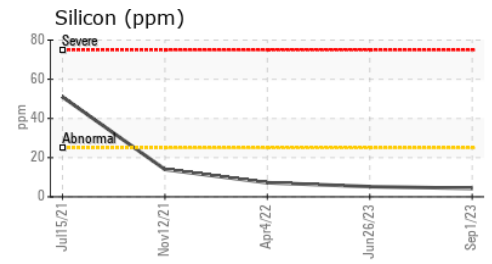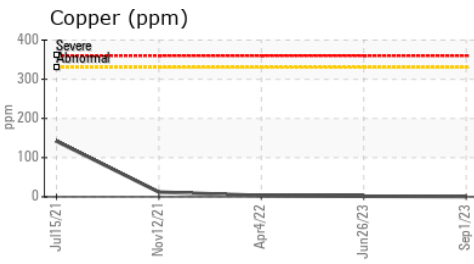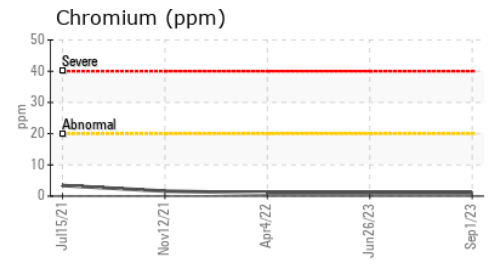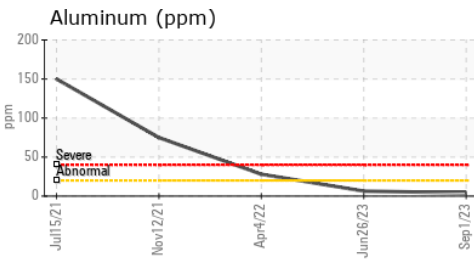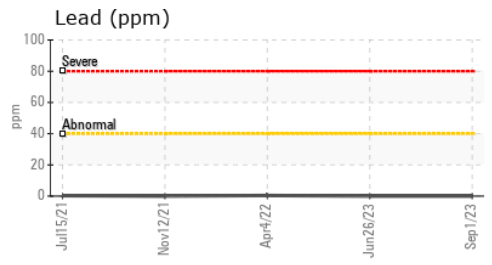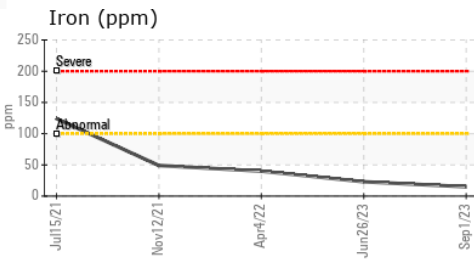

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105301 **Received** : 19 Sep 2023  
**Lab Number** : 05955151 **Diagnosed** : 20 Sep 2023  
**Unique Number** : 10656364 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: ROSTY VITER  
 rviter@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)