

OIL ANALYSIS REPORT



Machine Id 737101 Component Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Note that there appears to be a discrepancy in the total time on this component, when compared to the historical data.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


AL)			Jul2023	Sep2023		
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0105297	PCA0100788	
Sample Date		Client Info		05 Sep 2023	27 Jul 2023	
Machine Age	mls	Client Info		201081	51471	
Oil Age	mls	Client Info		201081	51471	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	87	58	
Chromium	ppm	ASTM D5185m	>20	4	3	
Nickel	ppm	ASTM D5185m	>4	1	<1	
Titanium	ppm	ASTM D5185m		2	1	
Silver	ppm	ASTM D5185m	>3	<1	0	
Aluminum	ppm	ASTM D5185m	>20	37	32	
Lead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	48	42	
Tin	ppm	ASTM D5185m	>15	2	1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	4	3	
Barium	ppm	ASTM D5185m	0	0	2	
Molybdenum	ppm	ASTM D5185m	50	66	59	
Manganese	ppm	ASTM D5185m	0	2	1	
Magnesium	ppm	ASTM D5185m	950	941	865	
Calcium	ppm	ASTM D5185m	1050	1389	1292	
Phosphorus	ppm	ASTM D5185m	995	1063	979	
Zinc	ppm	ASTM D5185m	1180	1345	1215	
Sulfur	ppm	ASTM D5185m	2600	2725	2290	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	7	
Sodium	ppm	ASTM D5185m		3	2	
Potassium	ppm	ASTM D5185m	>20	81	64	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.8	1.4	
Nitration	Abs/cm	*ASTM D7624	>20	16.9	13.8	
	Abo/ 1mm	*ASTM D7415	>30	29.2	25.9	
Sulfation	Abs/.1mm					
Sulfation FLUID DEGRA			limit/base	current	history1	history2
Sulfation FLUID DEGRAD Oxidation				current 33.6	history1 27.2	history2




OIL ANALYSIS REPORT







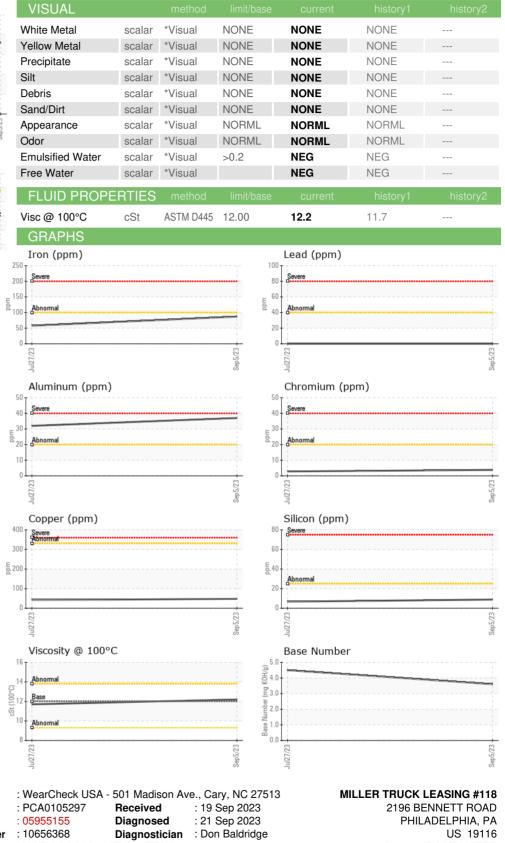





Laboratory

Sample No.