

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id Component

Fluic

Front Differential

CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

DIAGNOSIS	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		PCA0103250	PCA0091251	PCA0074812
Resample at the next service interval to monitor.	Sample Date		Client Info		15 Sep 2023	28 Mar 2023	23 Aug 2022
Wear	Machine Age	mls	Client Info		152645	127511	101226
All component wear rates are normal.	Oil Age	mls	Client Info		76300	0	24926
Contamination	Oil Changed		Client Info		Changed	Not Changd	Not Changd
There is no indication of any contamination in the	Sample Status				NORMAL	ABNORMAL	ABNORMAL
oil.	WEAR METAL	.S	method	limit/base	current	history1	history2
Fluid Condition	Iron		ASTM D5185m		165	147	121
The condition of the oil is acceptable for the time in	Chromium	ppm	ASTM D5185m		105	<1	<1
service.	Nickel	ppm	ASTM D5185m		6	7	3
		ppm					
	Titanium	ppm	ASTM D5185m	>4	<1	0	<1
	Silver	ppm	ASTM D5185m	10	0	0	0
	Aluminum	ppm	ASTM D5185m		6	2	3
	Lead	ppm	ASTM D5185m		0	0	0
	Copper	ppm	ASTM D5185m		<1	0	<1
	Tin	ppm	ASTM D5185m	>5	<1	0	0
	Vanadium	ppm	ASTM D5185m		0	0	0
	Cadmium	ppm	ASTM D5185m		0	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		206	211	216
	Barium	ppm	ASTM D5185m		0	0	1
	Molybdenum	ppm	ASTM D5185m		14	12	14
	Manganese	ppm	ASTM D5185m		2	2	2
	Magnesium	ppm	ASTM D5185m		122	107	111
	Calcium	ppm	ASTM D5185m		176	172	167
	Phosphorus	ppm	ASTM D5185m		1384	1348	1323
	Zinc	ppm	ASTM D5185m		171	156	173
	Sulfur	ppm	ASTM D5185m		26196	25056	21479
	CONTAMINAN	NTS	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>285	118	97	101
	Sodium	ppm	ASTM D5185m		3	0	<1
	Potassium	ppm	ASTM D5185m	>20	1	<1	2
	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	A MODER	A MODER
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
	Free Water	scalar	*Visual		NEG	NEG	NEG
	FLUID PROPE	ERTIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	106	80.2	86.0	86.4
				~			


Report Id: NWWPIE [WUSCAR] 05955605 (Generated: 09/21/2023 13:41:18) Rev: 1


Submitted By: Under NWWDUN - James Threatt



OIL ANALYSIS REPORT

SAMPLE IMAGES

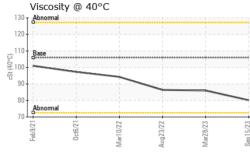

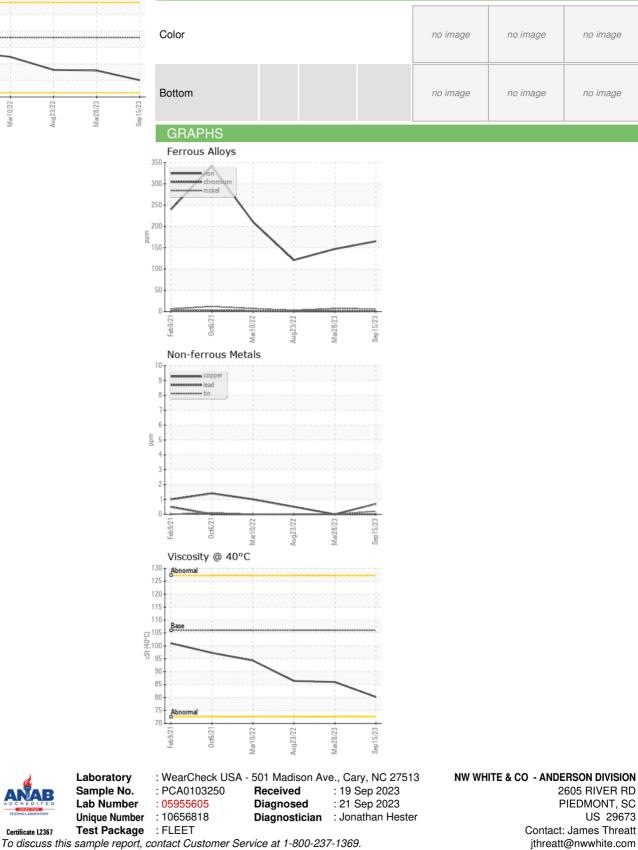

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T: (864)918-4646

F: