




# OIL ANALYSIS REPORT

## Sample Rating Trend

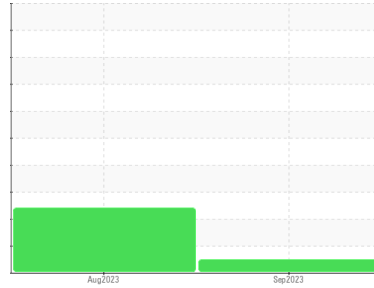

**NORMAL**



Machine Id  
**929144**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0093406</b>	GFL0080384	---
Sample Date	Client Info		<b>11 Sep 2023</b>	07 Aug 2023	---
Machine Age	hrs	Client Info	<b>2418</b>	2157	---
Oil Age	hrs	Client Info	<b>600</b>	600	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>32</b>	109	---
Chromium	ppm	ASTM D5185m >4	<b>2</b>	▲ 7	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	▲ 4	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>8</b>	▲ 31	---
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >85	<b>9</b>	39	---
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	<1	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m 60	<b>84</b>	70	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m 1010	<b>1289</b>	1029	---
Calcium	ppm	ASTM D5185m 1070	<b>1447</b>	1244	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1322</b>	1038	---
Zinc	ppm	ASTM D5185m 1270	<b>1686</b>	1322	---
Sulfur	ppm	ASTM D5185m 2060	<b>4460</b>	2808	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>11</b>	13	---
Sodium	ppm	ASTM D5185m	<b>7</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>6</b>	34	---

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0</b>	1.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	13.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.7</b>	26.9	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.5</b>	24.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.7</b>	5.3	---







# OIL ANALYSIS REPORT

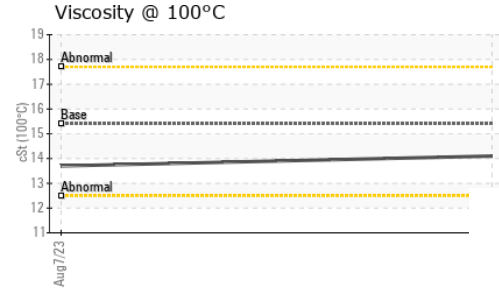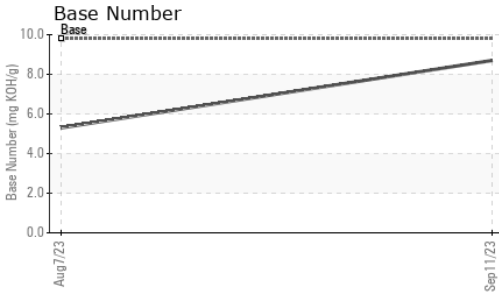

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	13.7	---

## GRAPHS

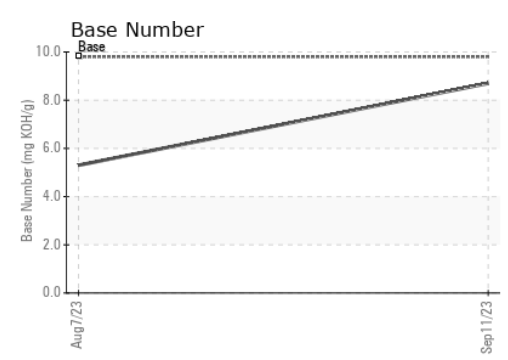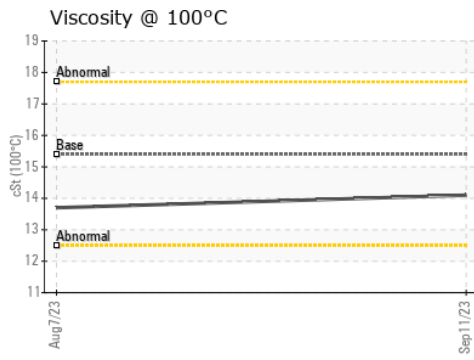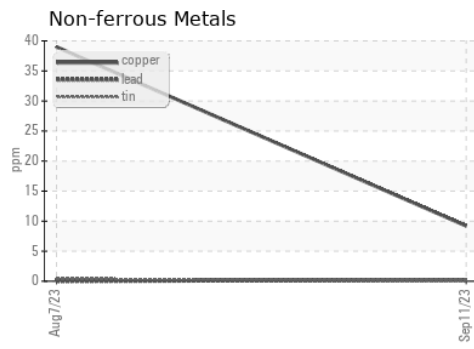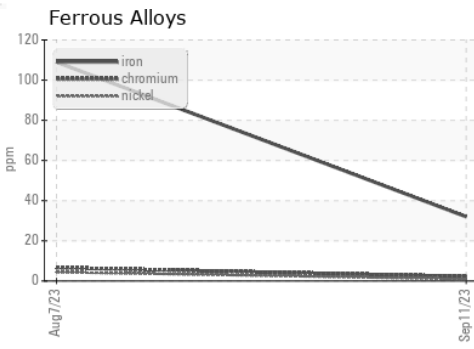

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0093406 **Received** : 19 Sep 2023  
**Lab Number** : 05955781 **Diagnosed** : 21 Sep 2023  
**Unique Number** : 10656994 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 892 - Pauls Valley Hauling**  
 405 East Airport Industrial Road  
 Pauls Valley, OK  
 US 73075  
 Contact: Tony Graham  
 tgraham2@wcamerica.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)