


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

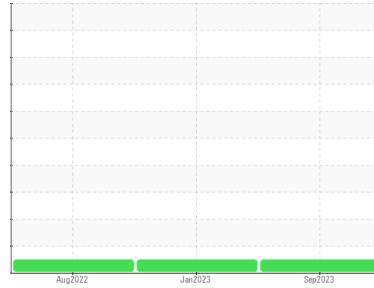

Area  
**(89971X) Walgreens - Tractor**  
Machine Id  
**[Walgreens] 136A68058**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0106137</b>	PCA0087928	PCA0079928
Sample Date	Client Info		<b>15 Sep 2023</b>	05 Jan 2023	29 Aug 2022
Machine Age	mls	Client Info	<b>571690</b>	516032	485979
Oil Age	mls	Client Info	<b>55658</b>	62376	32323
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>35</b>	37	20
Chromium	ppm	ASTM D5185m >5	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >30	<b>15</b>	19	11
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>5</b>	5	4
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>6</b>	5	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 50	<b>60</b>	70	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>915</b>	989	833
Calcium	ppm	ASTM D5185m 1050	<b>1294</b>	1258	1141
Phosphorus	ppm	ASTM D5185m 995	<b>957</b>	1073	973
Zinc	ppm	ASTM D5185m 1180	<b>1213</b>	1415	1185
Sulfur	ppm	ASTM D5185m 2600	<b>2986</b>	3404	2557

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	8	5
Sodium	ppm	ASTM D5185m	<b>2</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	4



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.5</b>	1.5	1.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.6</b>	10.9	10.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.1</b>	24.4	23.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.6</b>	19.1	17.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.4</b>	5.9	7.9





# OIL ANALYSIS REPORT

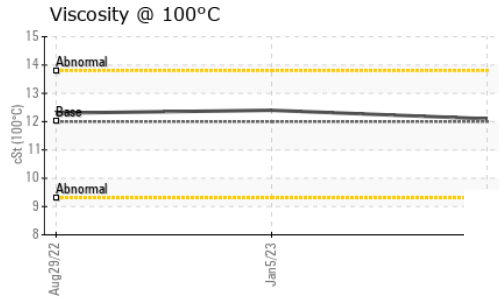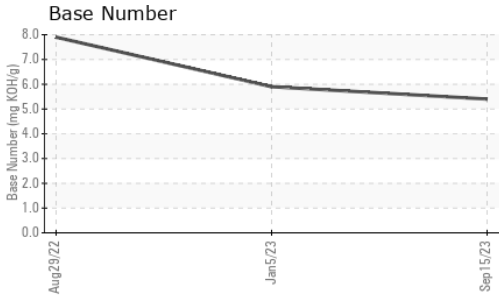

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.1</b>	12.4	12.3

## GRAPHS

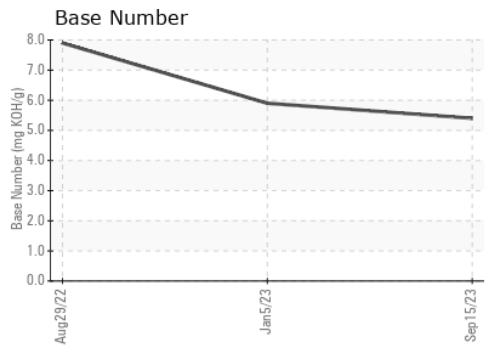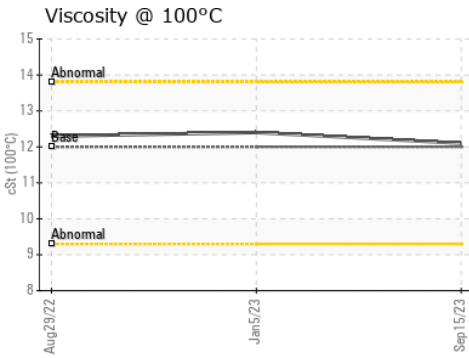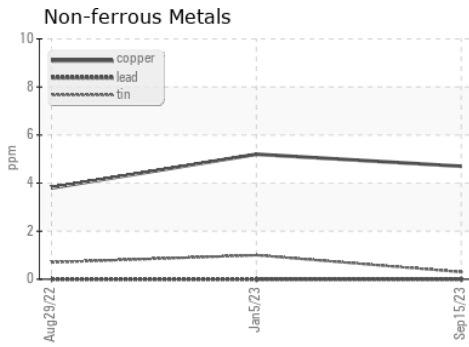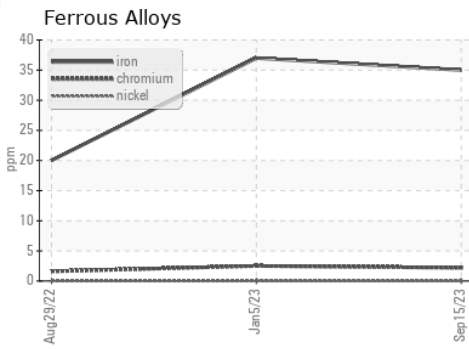

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106137 **Received** : 20 Sep 2023  
**Lab Number** : 05956236 **Diagnosed** : 22 Sep 2023  
**Unique Number** : 10657449 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Willamston, SC  
 US 29697  
 Contact: Sonny Boucher  
 sboucher@transervice.com  
 T: (864)226-2304  
 F: (864)226-2329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)