




PROBLEM SUMMARY

Sample Rating Trend

DIRT




Machine Id
934051
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (42 QTS)

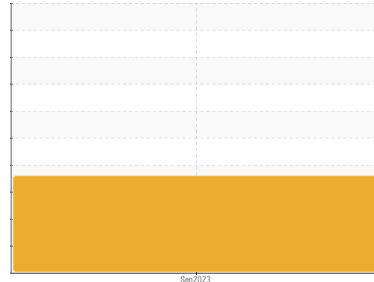


COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

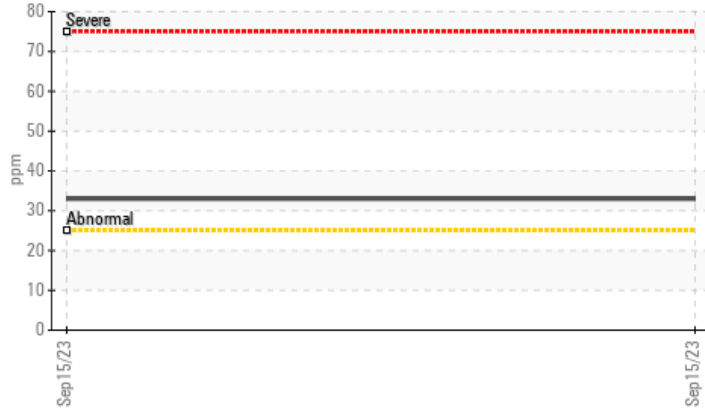

▲ Aluminum (ppm)

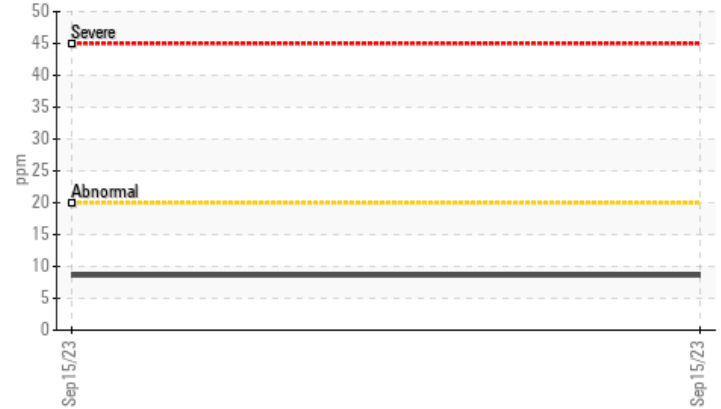

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Aluminum	ppm	ASTM D5185m	>20	▲ 9	---	---
Silicon	ppm	ASTM D5185m	>25	▲ 33	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 3.9	---	---

Customer Id: GFL035
Sample No.: GFL0071619
Lab Number: 05956295
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

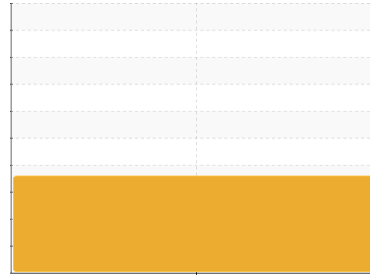

DIRT



Machine Id
934051
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (42 QTS)

DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

All component wear rates are normal.

▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0071619	---	---
Sample Date	Client Info		15 Sep 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	600	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	41	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m >2	0	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >20	▲ 9	---	---
Lead	ppm	ASTM D5185m >40	1	---	---
Copper	ppm	ASTM D5185m >330	19	---	---
Tin	ppm	ASTM D5185m >15	2	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	6	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 60	54	---	---
Manganese	ppm	ASTM D5185m 0	12	---	---
Magnesium	ppm	ASTM D5185m 1010	705	---	---
Calcium	ppm	ASTM D5185m 1070	1187	---	---
Phosphorus	ppm	ASTM D5185m 1150	661	---	---
Zinc	ppm	ASTM D5185m 1270	902	---	---
Sulfur	ppm	ASTM D5185m 2060	2353	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	▲ 33	---	---
Sodium	ppm	ASTM D5185m	4	---	---
Potassium	ppm	ASTM D5185m >20	21	---	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	11.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.3	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	▲ 3.9	---	---



OIL ANALYSIS REPORT






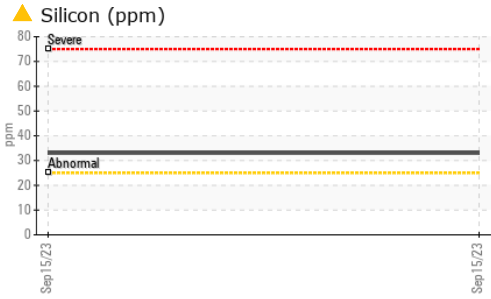


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

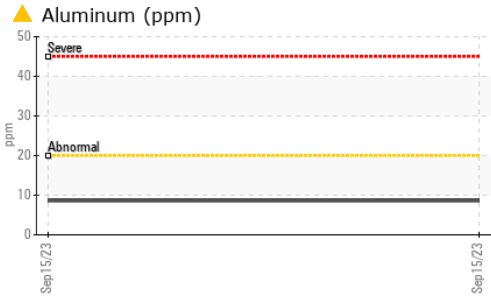

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	---

GRAPHS

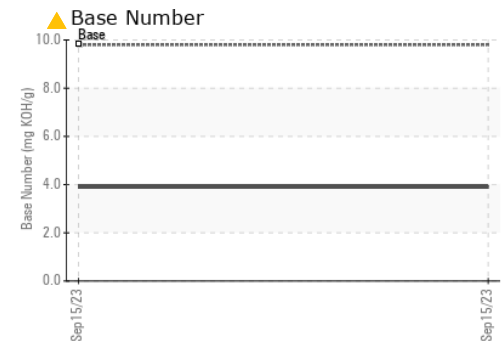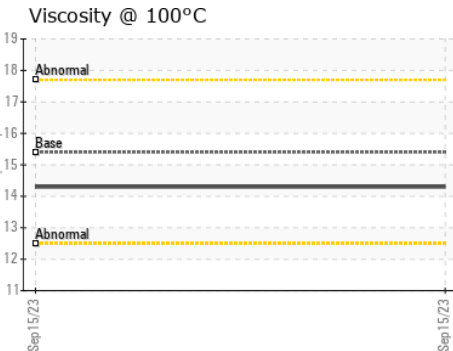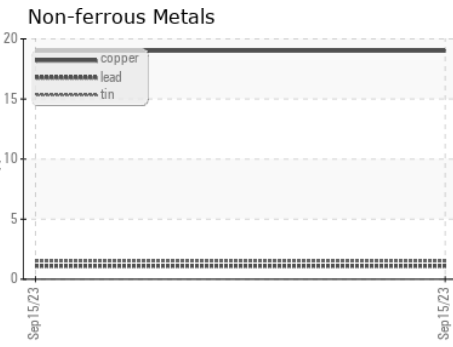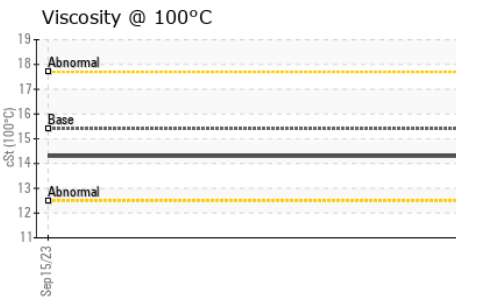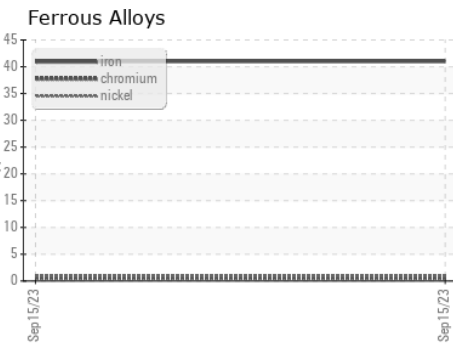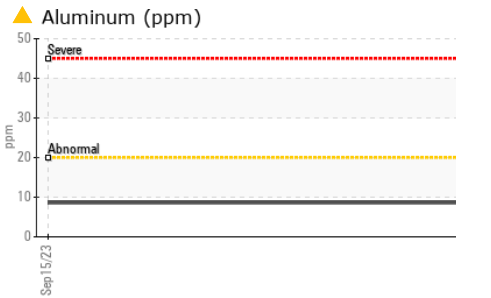

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0071619 Received : 20 Sep 2023
 Lab Number : 05956295 Diagnosed : 22 Sep 2023
 Unique Number : 10657508 Diagnostician : Jonathan Hester
 Test Package : FLEET

GFL Environmental - 035 - Greensboro
 1236 Elon Place
 High Point, NC
 US 27263
 Contact: JORGE COSTA
 jorge.costa@gflenv.com
 T: (336)668-3712
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)