

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**VOLVO TRACTOR 26448 (S/N HN985337)**

Component  
**Rear Differential**  
Fluid  
**NOT GIVEN (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0103992</b>	---	---
Sample Date	Client Info			<b>15 Sep 2023</b>	---	---
Machine Age	mls	Client Info		<b>427540</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>340</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>8</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>189</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>16</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	---	---
Calcium	ppm	ASTM D5185m		<b>45</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1422</b>	---	---
Zinc	ppm	ASTM D5185m		<b>41</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>29153</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>35</b>	---	---
Sodium	ppm	ASTM D5185m		<b>9</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>94.3</b>	---	---

# OIL ANALYSIS REPORT





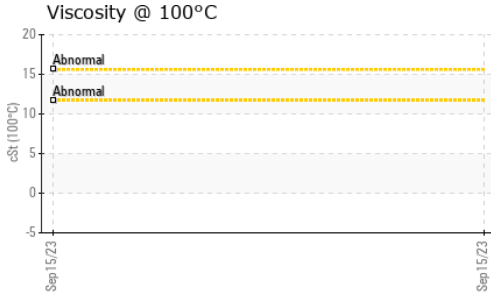


## SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

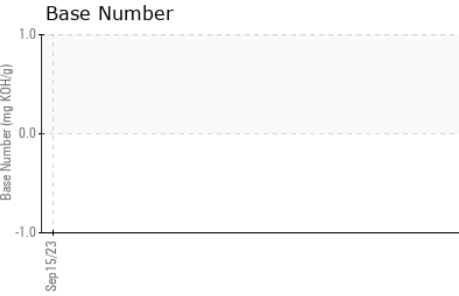

## GRAPHS

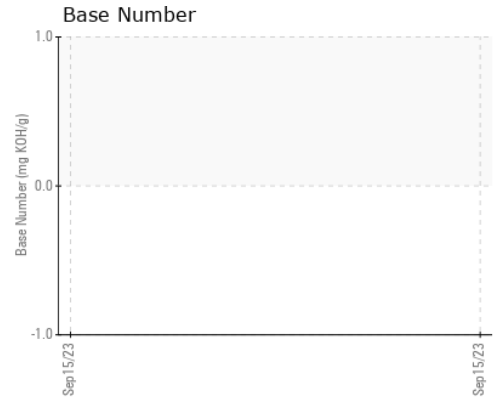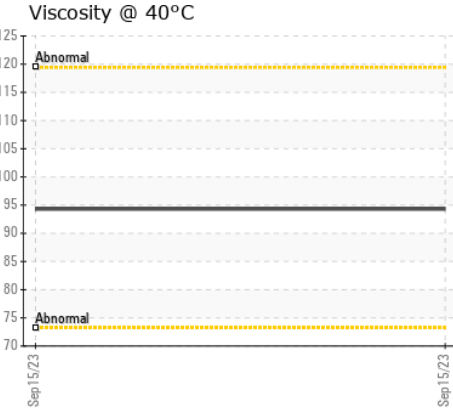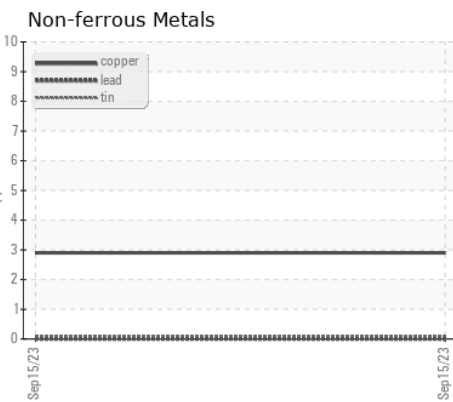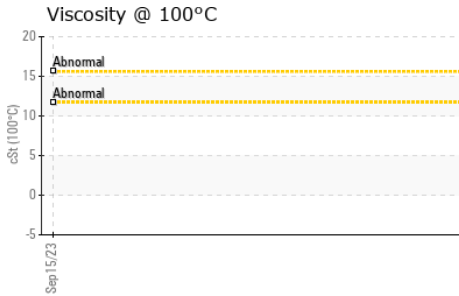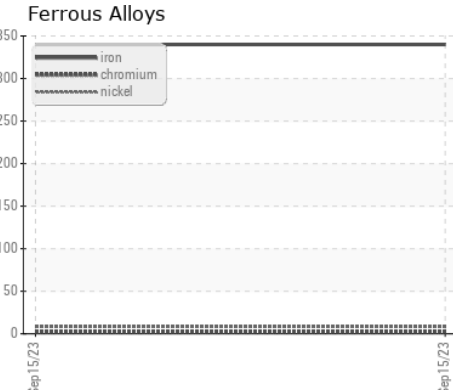

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103992      **Received** : 20 Sep 2023  
**Lab Number** : 05956746      **Diagnosed** : 22 Sep 2023  
**Unique Number** : 10657959      **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FT-IR, KV100, TBN )

**PERDUE FARMS - Lewiston**  
 210 GRIFFINS QUARTER RD  
 LEWISTON, NC  
 US 27849  
 Contact: NELSON WALLACE  
 nelson.wallace2@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: