


# **PROBLEM SUMMARY**

# VOLVO VNL 26359 (S/N 4VHMC9EG8EH173850)

Rear Differential

NOT GIVEN (--- QTS)

### COMPONENT CONDITION SUMMARY

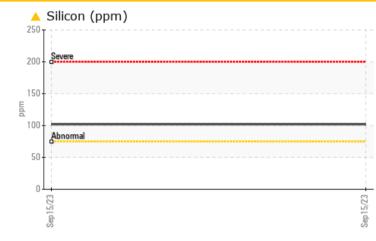

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Silicon	ppm	ASTM D5185m	>75	<u> </u>						


Customer Id: PERLEWNC Sample No.: PCA0103996 Lab Number: 05956748 Test Package: FLEET



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

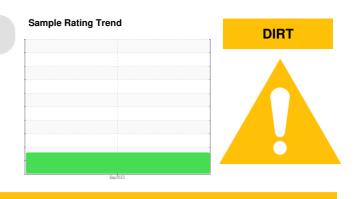

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

#### Sample Rating Trend

DIRT

### Machine Id VOLVO VNL 26359 (S/N 4VHMC9EG8EH173850) Component

**Rear Differential** Fluid

NOT GIVEN (--- QTS)

### DIAGNOSIS

### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		PCA0103996			
Sample Date		Client Info		15 Sep 2023			
Machine Age	mls	Client Info		449669			
Oil Age	mls	Client Info		449669			
Oil Changed		Client Info		Changed			
Sample Status				ABNORMAL			
WEAR METAL	S	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	450			
Chromium	ppm	ASTM D5185m	>10	3			
Nickel	ppm	ASTM D5185m	>10	<1			
Titanium	ppm	ASTM D5185m		<1			
Silver	ppm	ASTM D5185m		0			
Aluminum	ppm	ASTM D5185m	>25	3			
Lead	ppm	ASTM D5185m	>25	<1			
Copper	ppm	ASTM D5185m	>100	3			
Tin	ppm	ASTM D5185m	>10	<1			
Vanadium	ppm	ASTM D5185m		<1			
Cadmium	ppm	ASTM D5185m		0			
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		178			
Barium	ppm	ASTM D5185m		1			
Molybdenum	ppm	ASTM D5185m		0			
Manganese	ppm	ASTM D5185m		12			
Magnesium	ppm	ASTM D5185m		4			
Calcium	ppm	ASTM D5185m		15			
Phosphorus	ppm	ASTM D5185m		1451			
Zinc	ppm	ASTM D5185m		35			
Sulfur	ppm	ASTM D5185m		29301			
CONTAMINAN	ITS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>75	<u> </u>			
Sodium	ppm	ASTM D5185m		11			
Potassium	ppm	ASTM D5185m	>20	6			
VISUAL		method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE			
Yellow Metal	scalar	*Visual	NONE	NONE			
Precipitate	scalar	*Visual	NONE	NONE			
Silt	scalar	*Visual	NONE	NONE			
Debris	scalar	*Visual	NONE	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE			
Appearance	scalar	*Visual	NORML	NORML			
Odor	scalar	*Visual	NORML	NORML			
Emulsified Water	scalar	*Visual	>.2	NEG			
Free Water	scalar	*Visual		NEG			
FLUID PROPE	RTIES	method	limit/base	current	history1	history2	
Visc @ 40°C :18:19) Rev: 1	cSt ASTM D445 92.0 Contact/Location: NELSON WALLACE - PERLEWNC						

Report Id: PERLEWNC [WUSCAR] 05956748 (Generated: 10/01/2023 08:18:19) Rev: 1



# **OIL ANALYSIS REPORT**

