


PROBLEM SUMMARY

VOLVO TRACTOR 26448 (S/N HN985337)

Transmission Fluid NOT GIVEN (--- QTS)

COMPONENT CONDITION SUMMARY

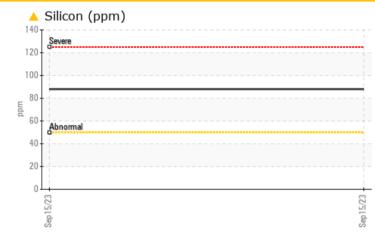

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL		
Silicon	ppm	ASTM D5185m	>50	<u> </u>		


Customer Id: PERLEWNC Sample No.: PCA0103993 Lab Number: 05956751 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

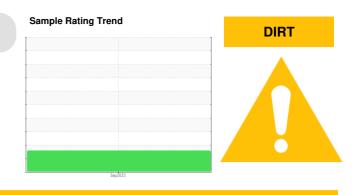

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

Machine Id **VOLVO TRACTOR 26448 (S/N HN985337)** Component

Transmission

NOT GIVEN (--- QTS)

DIAGNOSIS SAMPLE INFORMATION method limit/base current history1 history2 PCA0103993 Sample Number **Client Info** Recommendation No corrective action is recommended at this time. 15 Sep 2023 Sample Date Client Info Resample at the next service interval to monitor. 427540 Machine Age mls Client Info Oil Age mls Client Info 0 All component wear rates are normal. Oil Changed N/A **Client Info** Sample Status ABNORMAL WEAR METALS method limit/base current history1 history2 >200 Iron ppm ASTM D5185m 82 Chromium ASTM D5185m ppm >10 1 Nickel ppm ASTM D5185m <1 Titanium ASTM D5185m <1 ppm Silver ppm ASTM D5185m 0 Aluminum ASTM D5185m >50 2 ppm Lead ASTM D5185m >50 2 ppm ASTM D5185m >200 116 Copper ppm Tin ppm ASTM D5185m >10 <1 Vanadium ASTM D5185m 0 ppm Cadmium ppm ASTM D5185m 0 **ADDITIVES** limit/base current history2 method history1 Boron ppm ASTM D5185m <1 Barium ppm ASTM D5185m 0 3 Molybdenum ppm ASTM D5185m 50 Manganese ppm ASTM D5185m ASTM D5185m 3 Magnesium ppm 876 Calcium ASTM D5185m ppm Phosphorus ppm ASTM D5185m 666 Zinc ASTM D5185m 35 ppm Sulfur 5584 ppm ASTM D5185m CONTAMINANTS method limit/base current history1 history2 Silicon ASTM D5185m >50 88 ppm Sodium ppm ASTM D5185m 4 Potassium ASTM D5185m >20 4 ppm VISUAL method limit/base current history1 history2 White Metal scalar *Visual NONE NONE Yellow Metal *Visual NONE NONE scalar Precipitate scalar *Visual NONE NONE *Visual NONE NONE Silt scalar Debris scalar *Visual NONE NONE Sand/Dirt scalar *Visual NONE NONE *Visual NORML NORML Appearance scalar Odor *Visual NORML NORML scalar **Emulsified Water** *Visual NEG scalar >0.1

Report Id: PERLEWNC [WUSCAR] 05956751 (Generated: 10/01/2023 08:18:51) Rev: 1

Free Water

Visc @ 40°C

FLUID PROPERTIES

method ASTM D445

*Visual

scalar

cSt

49.8 Contact/Location: NELSON WALLACE - PERLEWNC

history1

NEG

current

limit/base

Page 3 of 4

history2



Contamination Elemental level of silicon (Si) above normal.

Fluid Condition

Wear

The condition of the oil is acceptable for the time in service.



OIL ANALYSIS REPORT

