



PROBLEM SUMMARY

Area
FLEET
 Machine Id
Perdue farms (S/N N631469)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

Sample Rating Trend



COMPONENT CONDITION SUMMARY

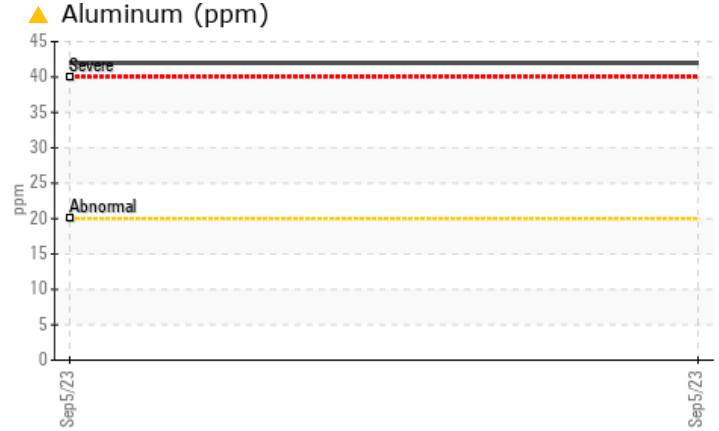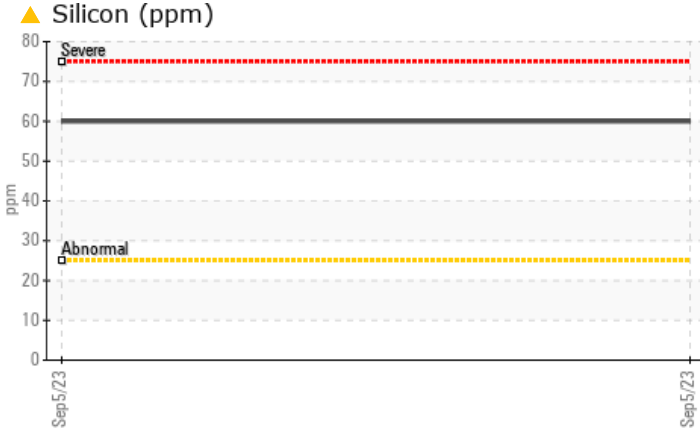

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Aluminum	ppm	ASTM D5185m	>20	▲ 42	---	---
Silicon	ppm	ASTM D5185m	>25	▲ 60	---	---

Customer Id: PERDILSC
 Sample No.: PCA0104856
 Lab Number: 05957439
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com


RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

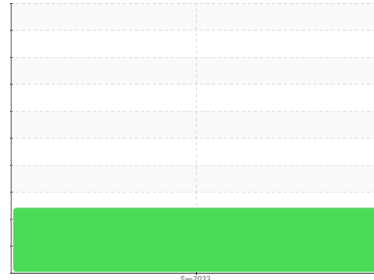

Area
FLEET
 Machine Id
Perdue farms (S/N N631469)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

- Recommendation**
 We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.
- Fluid Condition**
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0104856	---	---
Sample Date	Client Info	05 Sep 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	40	---	---
Chromium	ppm ASTM D5185m >20	<1	---	---
Nickel	ppm ASTM D5185m >4	2	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m >3	18	---	---
Aluminum	ppm ASTM D5185m >20	▲ 42	---	---
Lead	ppm ASTM D5185m >40	2	---	---
Copper	ppm ASTM D5185m >330	146	---	---
Tin	ppm ASTM D5185m >15	4	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	284	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 50	121	---	---
Manganese	ppm ASTM D5185m 0	3	---	---
Magnesium	ppm ASTM D5185m 950	724	---	---
Calcium	ppm ASTM D5185m 1050	1562	---	---
Phosphorus	ppm ASTM D5185m 995	694	---	---
Zinc	ppm ASTM D5185m 1180	845	---	---
Sulfur	ppm ASTM D5185m 2600	2725	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 60	---	---
Sodium	ppm ASTM D5185m	5	---	---
Potassium	ppm ASTM D5185m >20	106	---	---





INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm *ASTM D7624 >20	8.4	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	24.1	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.5	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.2	---	---





OIL ANALYSIS REPORT

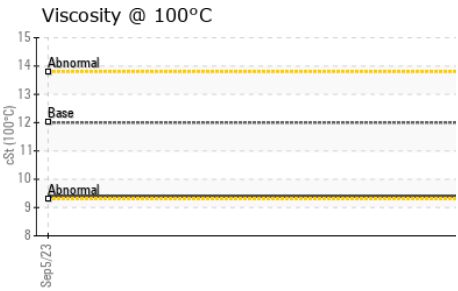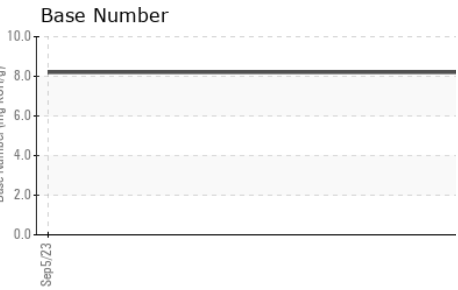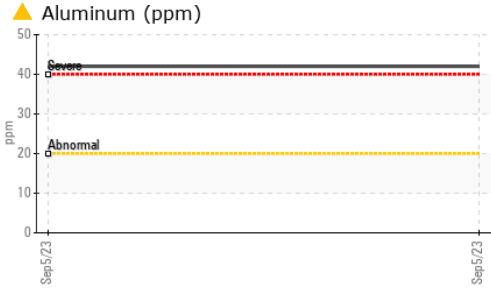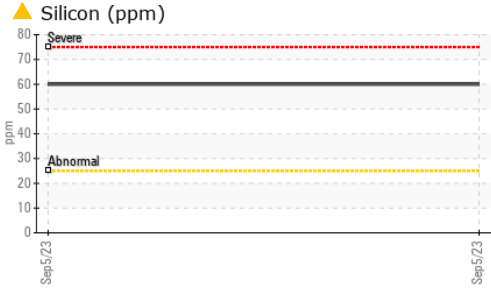

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	9.4	---

GRAPHS

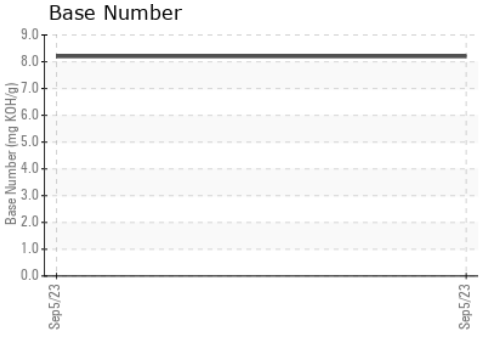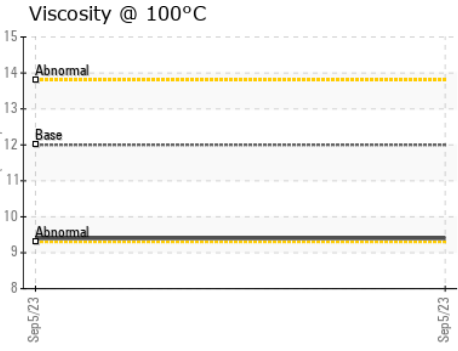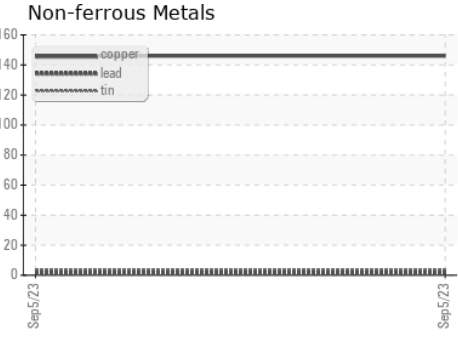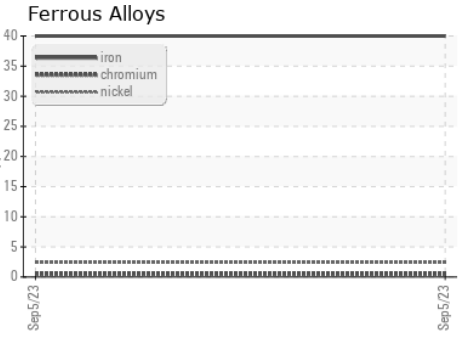

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104856 **Received** : 21 Sep 2023
Lab Number : **05957439** **Diagnosed** : 22 Sep 2023
Unique Number : 10658652 **Diagnostician** : Don Baldrige
Test Package : FLEET

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)