


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

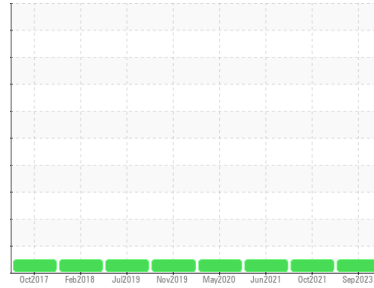

Machine Id  
**476735**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0099139</b>	PCA0050505	PCA0050470
Sample Date	Client Info		<b>07 Sep 2023</b>	06 Oct 2021	15 Jun 2021
Machine Age	mls	Client Info	<b>0</b>	400982	367917
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>56</b>	45	45
Chromium	ppm	ASTM D5185m >20	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	4
Lead	ppm	ASTM D5185m >40	<b>4</b>	2	2
Copper	ppm	ASTM D5185m >330	<b>3</b>	3	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>16</b>	4	13
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>75</b>	73	64
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>1180</b>	1017	972
Calcium	ppm	ASTM D5185m 1050	<b>1378</b>	1220	1113
Phosphorus	ppm	ASTM D5185m 995	<b>1248</b>	1096	1032
Zinc	ppm	ASTM D5185m 1180	<b>1558</b>	1294	1273
Sulfur	ppm	ASTM D5185m 2600	<b>4054</b>	2690	2480

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	4	14
Sodium	ppm	ASTM D5185m	<b>5</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>4</b>	4	<1



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	1	1
Nitration	Abs/cm	*ASTM D7624 >20	<b>15.5</b>	15.1	15.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>29.7</b>	27.1	28.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>28.6</b>	26.9	27.4
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.1</b>	---	---









# OIL ANALYSIS REPORT

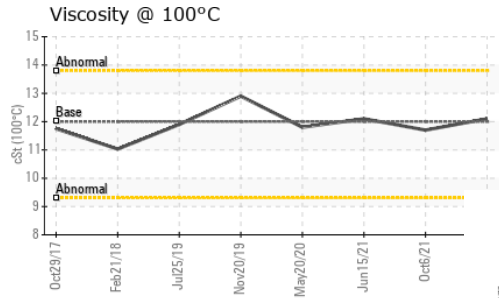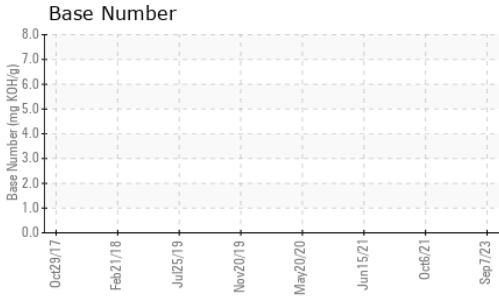

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.1	11.7

## GRAPHS

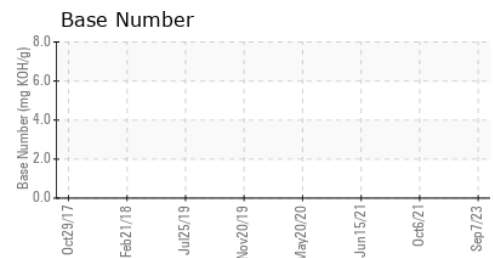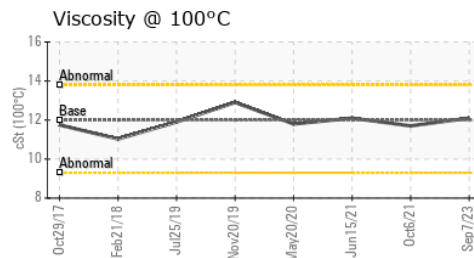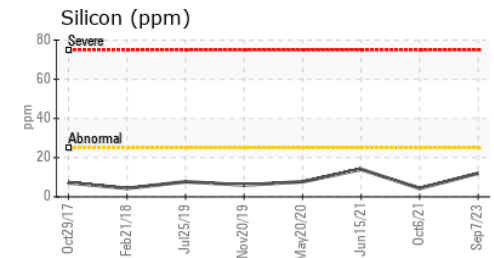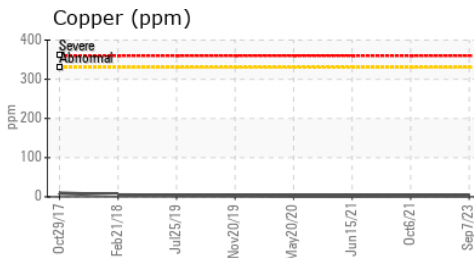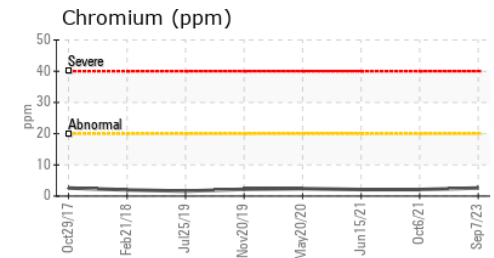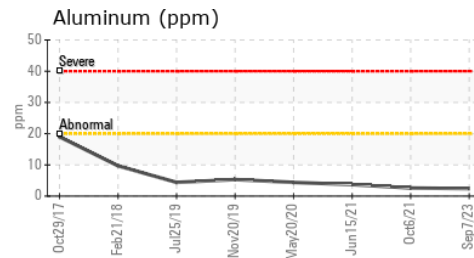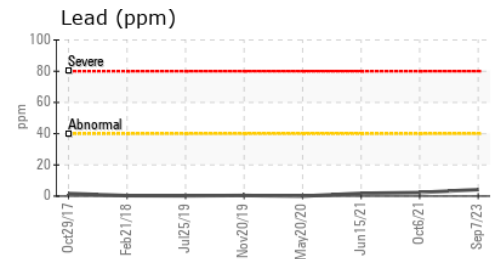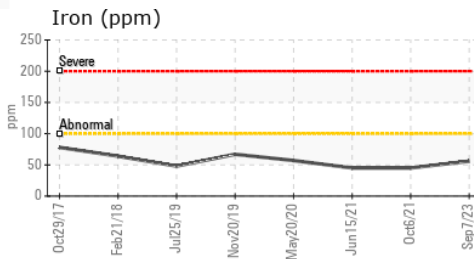

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099139 **Received** : 21 Sep 2023  
**Lab Number** : 05957449 **Diagnosed** : 22 Sep 2023  
**Unique Number** : 10658662 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #116**  
 1197 NORTH MAIN ROAD  
 VINELAND, NJ  
 US 08360  
 Contact: GARY PRICE  
 gprice@millertransgroup.com  
 T: (856)696-4848  
 F: (856)696-5629

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)