

PROBLEM SUMMARY

Sample Rating Trend


DIRT

Machine Id **2026815**

Component **Differential**

GEAR OIL SAE 75W90 (--- GAL)

COMPONENT CONDITION SUMMARY

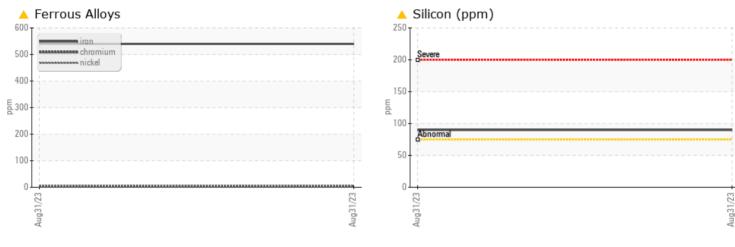

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS											
Sample Status				ABNORMAL							
Iron	ppm	ASTM D5185m	>500	<u></u> 40 ∆							
Silicon	ppm	ASTM D5185m	>75	<u> </u>							

Customer Id: PERDILSC Sample No.: PCA0104909 Lab Number: 05957880 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



2026815

Component

Differential

GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

A Waar

Gear wear is indicated. All other component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.

Fluid Condition

The condition of the oil is acceptable for the time in service.

				Aug2023		
SAMPLE INFORM	//ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104909		
Sample Date		Client Info		31 Aug 2023		
Machine Age	mls	Client Info		288268		
Oil Age	mls	Client Info		288268		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	540		
Chromium	ppm	ASTM D5185m	>10	4		
Nickel	ppm	ASTM D5185m	>10	7		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	1		
Lead	ppm	ASTM D5185m	>25	2		
Copper	ppm	ASTM D5185m	>100	96		
Tin	ppm	ASTM D5185m	>10	3		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	102		
Barium	ppm	ASTM D5185m	200	0		
Molybdenum	ppm	ASTM D5185m	12	0		
Manganese	ppm	ASTM D5185m		18		
Magnesium	ppm	ASTM D5185m	12	4		
Calcium	ppm	ASTM D5185m	150	10		
Phosphorus	ppm	ASTM D5185m	1650	1280		
Zinc	ppm	ASTM D5185m	125	15		
Sulfur	ppm	ASTM D5185m	22500	24907		
CONTAMINAN [*]	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<u> </u>		
Sodium	ppm	ASTM D5185m		11		
Potassium	ppm	ASTM D5185m	>20	1		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		

limit/base

ASTM D445 109

current

100

Visc @ 40°C

FLUID PROPERTIES method


cSt

history1

history2



OIL ANALYSIS REPORT

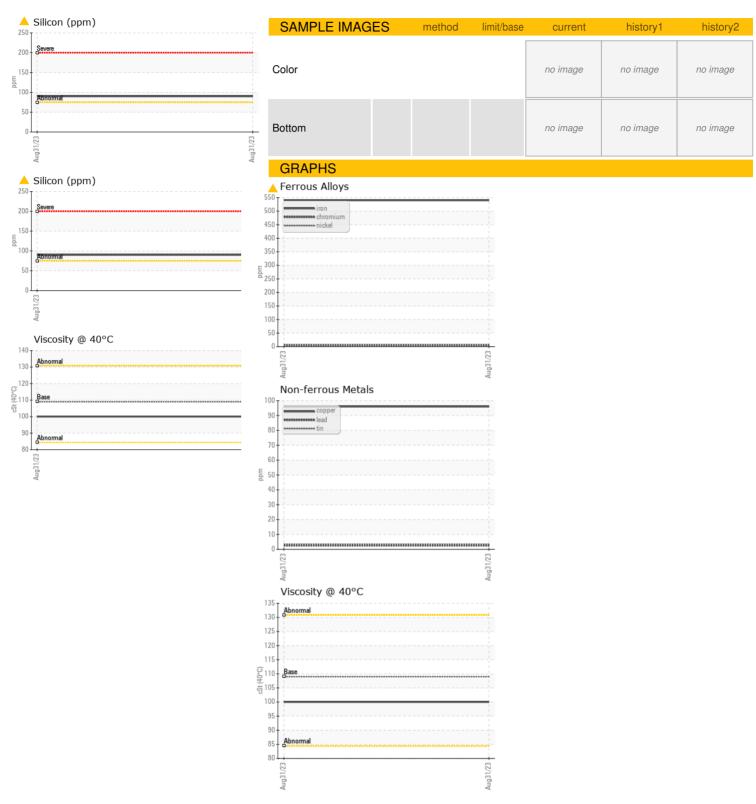



Certificate L2367

Report Id: PERDILSC [WUSCAR] 05957880 (Generated: 09/30/2023 18:47:19) Rev: 1

Laboratory Sample No. Lab Number

: PCA0104909 : 05957880 Unique Number : 10659093 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 21 Sep 2023 : 23 Sep 2023 Diagnosed Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PERDUE FARMS - DILLON

2047 HWY 9 WEST DILLON, SC US 29536

Contact: KEVIN HOOKS kevin.hooks@perdue.com

Submitted By: KEVIN HOOKS

T: (843)841-8069 F: (843)841-8070

Page 4 of 4