


Sample Rating Trend WATER

Machine Id **1926741** Component **Rear Differential** Fluid **GEAR OIL SAE 75W90 (--- GAL)**

OIL DIAGNOSTICS

COMPONENT CONDITION SUMMARY

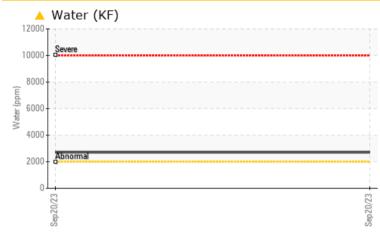

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMAT	FIC TES	T RESULT	S		
Sample Status				MARGINAL	
Water	%	ASTM D6304	>.2	A 0.270	
ppm Water	ppm	ASTM D6304	>2000	A 2700	

Customer Id: PERDILSC Sample No.: PCA0104893 Lab Number: 05957881 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **1926741**

Component Rear Differential Fluid GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

A Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil.


Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104893		
Sample Date		Client Info		20 Sep 2023		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				MARGINAL		
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	179		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	10		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	1		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	3		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	209		
Barium	ppm	ASTM D5185m	200	0		
Molybdenum	ppm	ASTM D5185m	12	0		
Manganese	ppm	ASTM D5185m		10		
Magnesium	ppm	ASTM D5185m	12	3		
Calcium	ppm	ASTM D5185m	150	8		
Phosphorus	ppm	ASTM D5185m	1650	1313		
Zinc	ppm	ASTM D5185m	125	15		
Sulfur	ppm	ASTM D5185m	22500	26237		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	32		
Sodium	ppm	ASTM D5185m		10		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>.2	<u> </u>		
ppm Water	ppm	ASTM D6304	>2000	A 2700		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Carra Birt			NODM	NODMI		
	scalar	*Visual	NORML	NORML		
Appearance	scalar scalar	*Visual *Visual	NORML	NORML		
Appearance Odor Emulsified Water						



OIL ANALYSIS REPORT

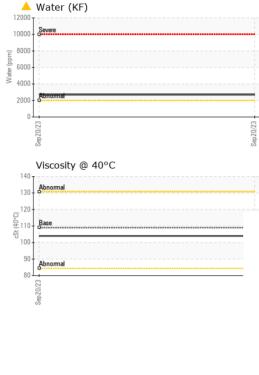

	FLUID PROF Visc @ 40°C	cSt	ASTM D445	limit/base	current 104	history1	histo
	SAMPLE IMA		method	limit/base	current	history1	histo
	Color				no image	no image	no ima
)/23							
Sep20/23	Bottom				no image	no image	no ima
	DOLLOITI				no image	no image	no ime
	GRAPHS						
	Ferrous Alloys						
	160 - iron chromium						
	140 nickel						
	80						
	80 - 4 60 - 6 60 - 6 60 - 6 60 - 6 7 60 - 6 7 6 7 6 7 6 7 6 7 6 7 7 7 7 7 8 7 8 7						
	40 -						
	20						
	Sep20/23			Sep20/23			
	ਡ Non-ferrous Me	tals		Se			
	10 9 copper	cuis					
	8 - tin						
	7						
	Ē 5-						
	3						
	2						
				23			
	Sep20/23			Sep20/23			
	Viscosity @ 40°	с					
	130 - Abnormal						
	125						
1000	115						
5	3 110 - Base 3 105						
	95 -						
	90 - 85 - Abnormal						
	80 80 80			1/23			
	Sep 20/23			Sep20/23			
oratory	: WearCheck USA	- 501 Mad	lison Ave., Ca	ry, NC 27513	3	PERDUE FA	RMS - DI
mple No. b Number	: PCA0104893 : 05957881	Receive Diagnos	ed : 21	Sep 2023 Sep 2023			HWY 9 DILLO
que Number	: 10659094	Diagnos	stician : Dor	n Baldridge			US 2
est Package	: FLEET (Additiona contact Customer Se	al Tests: K ervice at 1-	F) <i>800-237-136</i> 9	9.		Contact: kevin.hook	
	are outside of the ISC						(843)841

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (843)841-8070