


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

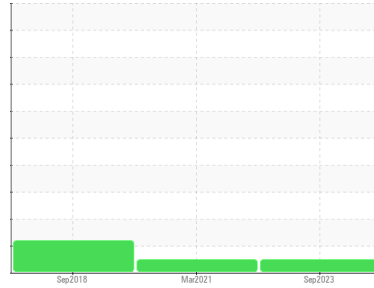

Area  
**FLEET**  
Machine Id  
**VOLVO 26588 (S/N 4V4WC9EH5JN898205)**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (38 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0079799</b>	PCA0040616	PCAMF017802
Sample Date	Client Info			<b>18 Sep 2023</b>	05 Mar 2021	03 Sep 2018
Machine Age	mls	Client Info		<b>0</b>	32145	53468
Oil Age	mls	Client Info		<b>0</b>	32145	37887
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>10</b>	36	94
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	2	23
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	2
Copper	ppm	ASTM D5185m	>330	<b>0</b>	8	118
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	4
Antimony	ppm	ASTM D5185m		<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>&lt;1</b>	2	1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	60	52
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	3
Magnesium	ppm	ASTM D5185m	950	<b>993</b>	1026	901
Calcium	ppm	ASTM D5185m	1050	<b>1102</b>	1142	1164
Phosphorus	ppm	ASTM D5185m	995	<b>993</b>	972	836
Zinc	ppm	ASTM D5185m	1180	<b>1261</b>	1215	1110
Sulfur	ppm	ASTM D5185m	2600	<b>3167</b>	1934	1698

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>9</b>	7	12
Sodium	ppm	ASTM D5185m		<b>8</b>	16	7
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	18	▲ 63

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.7	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>13.2</b>	13.3	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>27.5</b>	26.9	23.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.3</b>	24.7	21.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.5</b>	5	5.1





# OIL ANALYSIS REPORT

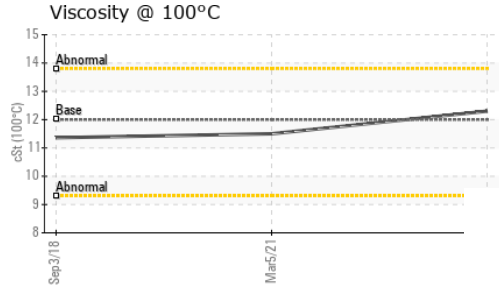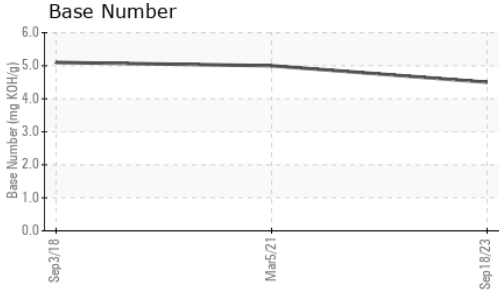

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.3</b>	11.5

## GRAPHS

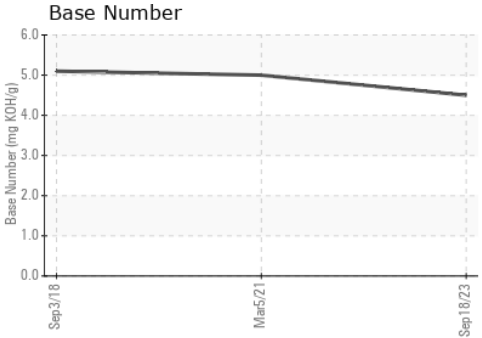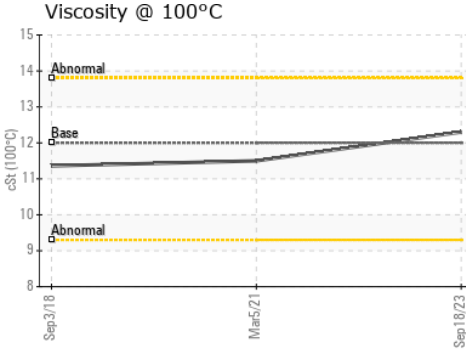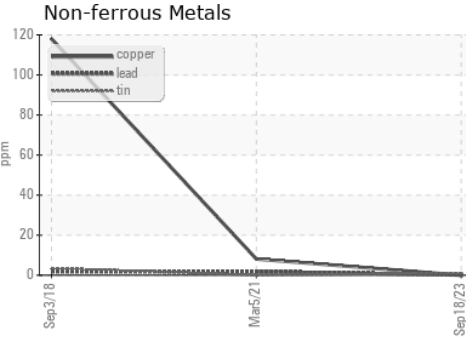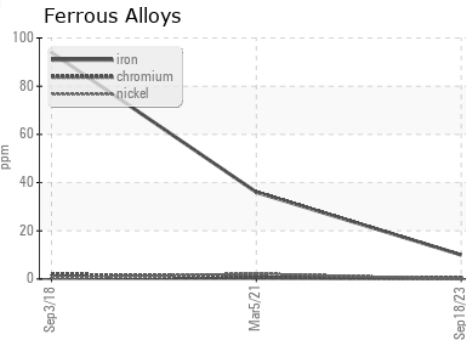

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0079799 **Received** : 21 Sep 2023  
**Lab Number** : **05958058** **Diagnosed** : 22 Sep 2023  
**Unique Number** : 10659271 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - COFIELD**  
 242 PERDUE RD  
 COFIELD, NC  
 US 27922  
 Contact: JOHNNY LASSITER  
 johnny.lassiter@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: