




OIL ANALYSIS REPORT

Sample Rating Trend

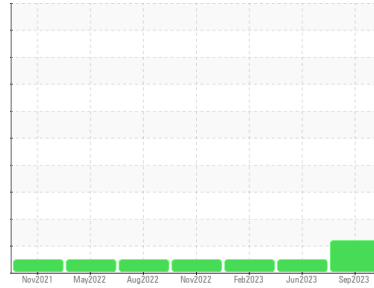

FUEL



Machine Id
929062

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0038679	GFL0081256	GFL0071246
Sample Date	Client Info			19 Sep 2023	30 Jun 2023	07 Feb 2023
Machine Age	hrs	Client Info		10217	9874	8864
Oil Age	hrs	Client Info		600	600	600
Oil Changed	Client Info			Not Chngd	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	3	20	12
Chromium	ppm	ASTM D5185m	>4	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	12
Lead	ppm	ASTM D5185m	>45	0	0	5
Copper	ppm	ASTM D5185m	>85	<1	2	2
Tin	ppm	ASTM D5185m	>4	0	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	2	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	51	62	58
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	866	979	883
Calcium	ppm	ASTM D5185m	1070	973	1073	994
Phosphorus	ppm	ASTM D5185m	1150	941	980	911
Zinc	ppm	ASTM D5185m	1270	1157	1315	1173
Sulfur	ppm	ASTM D5185m	2060	3500	3082	3334




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	3	5	2
Sodium	ppm	ASTM D5185m		4	4	<1
Potassium	ppm	ASTM D5185m	>20	4	1	2
Fuel	%	ASTM D3524	>5	▲ 5.3	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	1.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	5.4	9.1	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.3	21.7	18.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	17.5	14.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9	7.2	8.3











OIL ANALYSIS REPORT

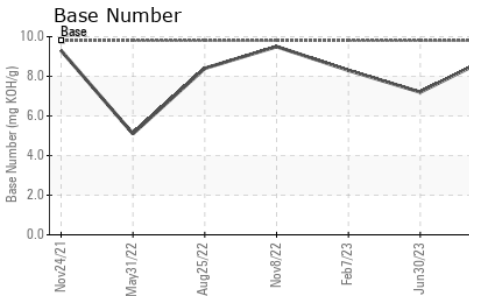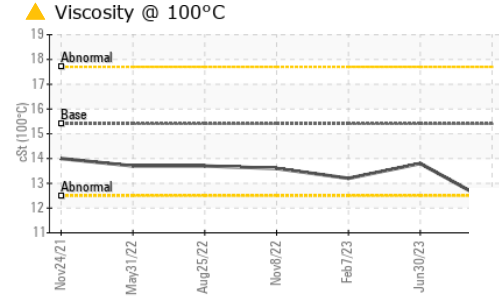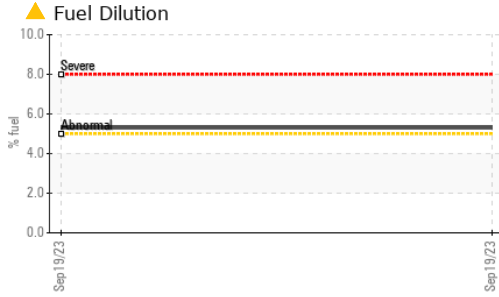

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.2	13.8	13.2

GRAPHS

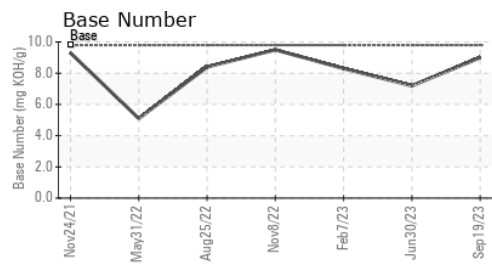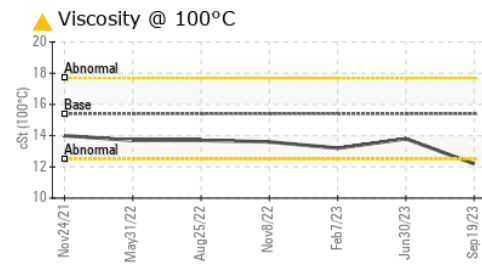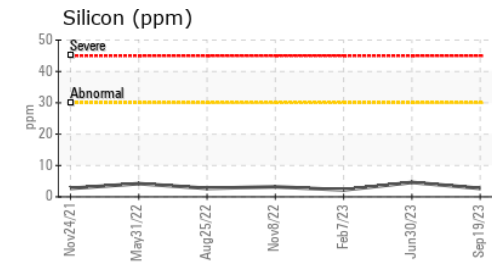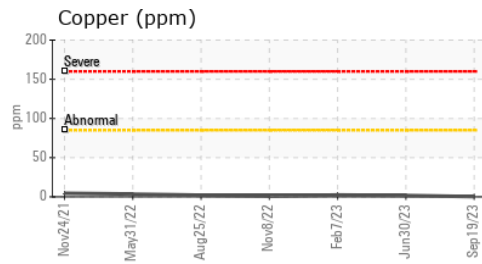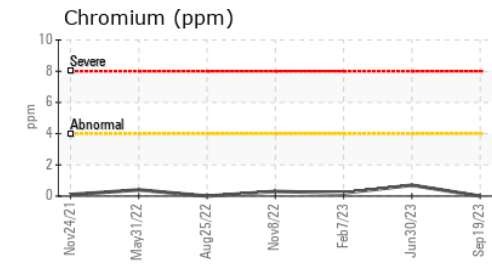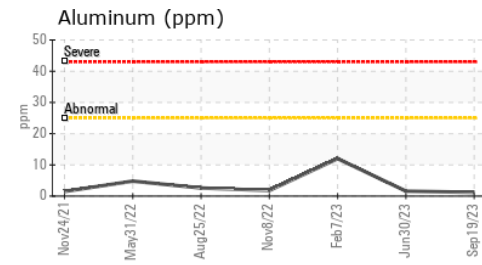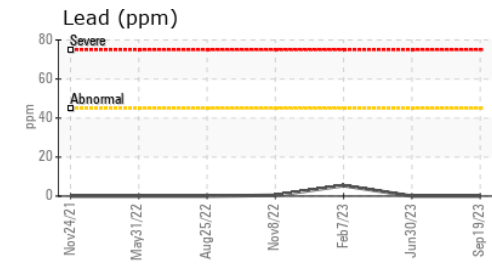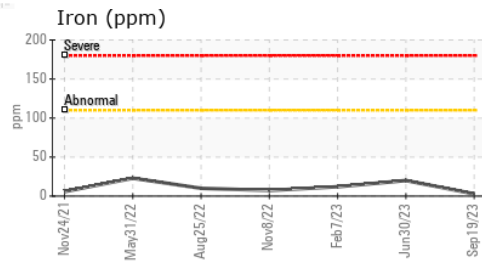

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0038679 **Received** : 22 Sep 2023
Lab Number : 05958358 **Diagnosed** : 26 Sep 2023
Unique Number : 10659571 **Diagnostician** : Wes Davis
Test Package : MOB1+ (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 465 - Pontiac
 888 Baldwin
 Pontiac, MI
 US 48340
 Contact: Ricky Matthews
 rickymathews@gflenv.com
 T: (586)825-9514
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)