

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
TPO - Extrusion Calender Hydraulic [T3320]
 Machine Id
CALENDER ROLL T3320 (S/N 75063215)
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 46 (200 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0106225	---	---
Sample Date	Client Info	20 Sep 2023	---	---
Machine Age	yrs Client Info	3	---	---
Oil Age	yrs Client Info	3	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184 >45	16	---	---
Iron	ppm ASTM D5185m >30	0	---	---
Chromium	ppm ASTM D5185m >2	0	---	---
Nickel	ppm ASTM D5185m >2	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m >2	1	---	---
Lead	ppm ASTM D5185m >10	0	---	---
Copper	ppm ASTM D5185m >25	<1	---	---
Tin	ppm ASTM D5185m >20	0	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 0	0	---	---
Manganese	ppm ASTM D5185m 0	0	---	---
Magnesium	ppm ASTM D5185m 0	2	---	---
Calcium	ppm ASTM D5185m 50	51	---	---
Phosphorus	ppm ASTM D5185m 330	360	---	---
Zinc	ppm ASTM D5185m 430	446	---	---
Sulfur	ppm ASTM D5185m 760	1326	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	0	---	---
Sodium	ppm ASTM D5185m	2	---	---
Potassium	ppm ASTM D5185m >20	2	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	833	---	---
Particles >6µm	ASTM D7647 >1300	199	---	---
Particles >14µm	ASTM D7647 >160	12	---	---
Particles >21µm	ASTM D7647 >40	4	---	---
Particles >38µm	ASTM D7647 >10	1	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	17/15/11	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.70	0.25	---	---

OIL ANALYSIS REPORT

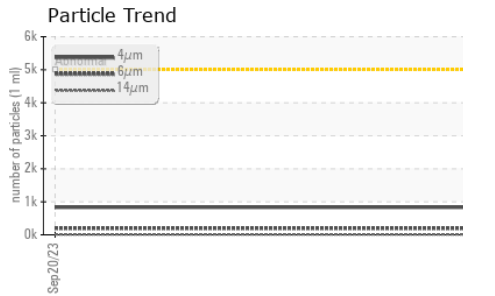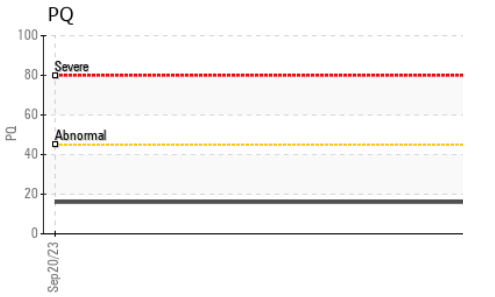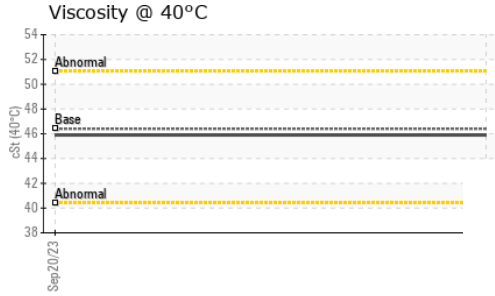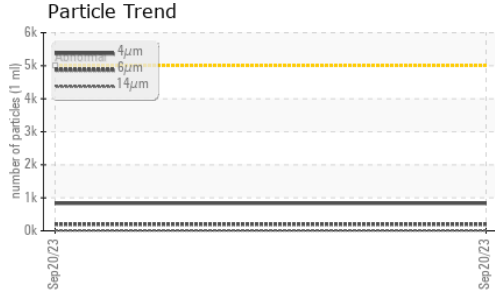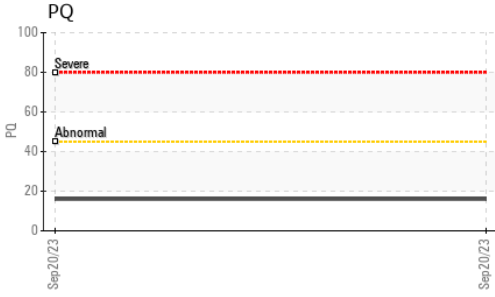

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---





PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.4	45.9	---

PARAMETER	method	limit/base	current	history1	history2
-----------	--------	------------	---------	----------	----------

SAMPLE IMAGES

PARAMETER	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

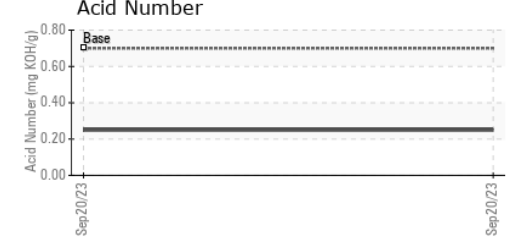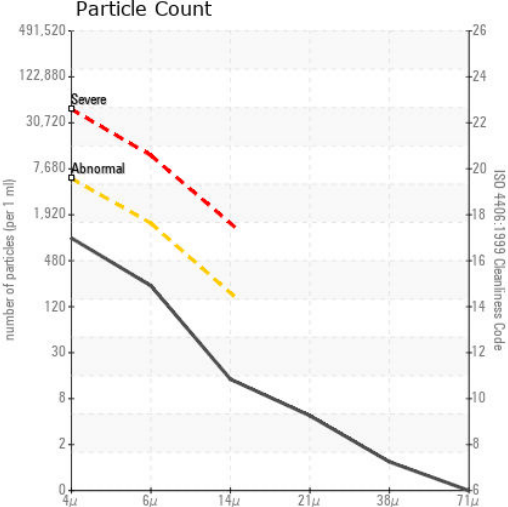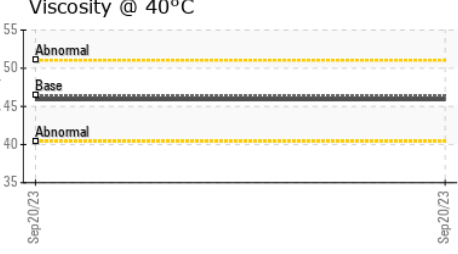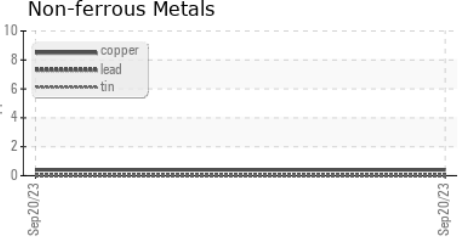

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106225
Lab Number : 05958714
Unique Number : 10659927
Test Package : PLANT

Received : 22 Sep 2023
Diagnosed : 27 Sep 2023
Diagnostician : Doug Bogart

IKO HAGERSTOWN
 160 IKO WAY
 HAGERSTOWN, MD
 US 21740
 Contact: LUIS FERNANDEZ
 luis.fernandez@iko.com
 T: (240)267-4100
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)