


Area  
**G.LOPES CONSTRUCTION INC./ON-ROAD**  
 Machine Id  
**PU309**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

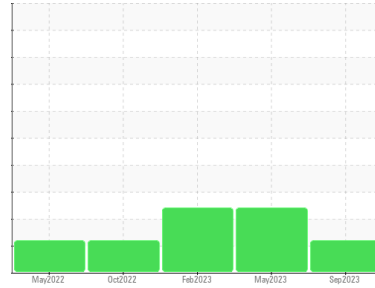

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0104692</b>	PCA0083260	PCA0090585
Sample Date	Client Info		<b>20 Sep 2023</b>	24 May 2023	01 Feb 2023
Machine Age	mls	Client Info	<b>26000</b>	20000	15000
Oil Age	mls	Client Info	<b>11000</b>	10000	10000
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	SEVERE	SEVERE

CONTAMINATION	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	NEG	NEG

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>21</b>	23	25
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	2	5
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>13</b>	4	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>71</b>	58	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	1
Magnesium	ppm	ASTM D5185m 1010	<b>399</b>	829	837
Calcium	ppm	ASTM D5185m 1070	<b>1761</b>	1087	1007
Phosphorus	ppm	ASTM D5185m 1150	<b>913</b>	969	937
Zinc	ppm	ASTM D5185m 1270	<b>1147</b>	1184	1122
Sulfur	ppm	ASTM D5185m 2060	<b>3998</b>	3591	2934


CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	6	6
Sodium	ppm	ASTM D5185m	<b>3</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	2
Fuel	%	ASTM D3524 >5	<b>▲ 7.4</b>	● 9.7	● 8.5

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	10.5	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.7</b>	21.2	19.2


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.3</b>	20.3	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>4.16</b>	8.94	8.73

# OIL ANALYSIS REPORT


▲ Fuel Dilution

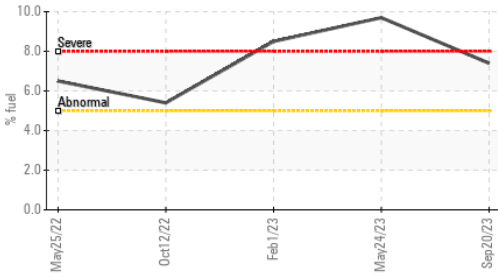

▲ Viscosity @ 100°C

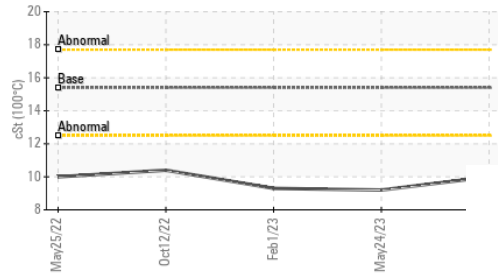

Base Number

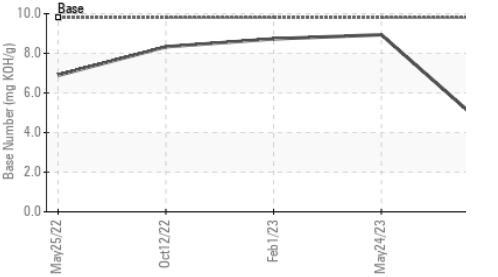


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 10.0	▲ 9.2	▲ 9.3

GRAPHS


Iron (ppm)

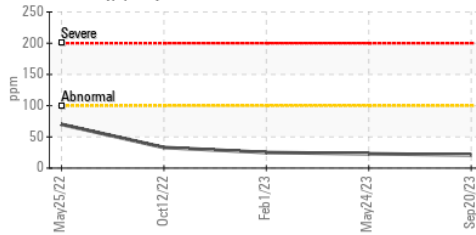


Lead (ppm)

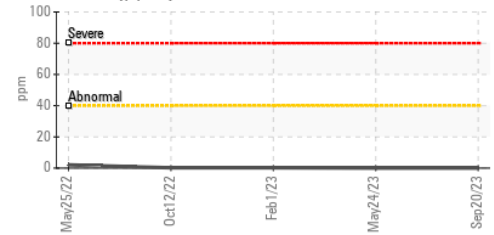


Aluminum (ppm)

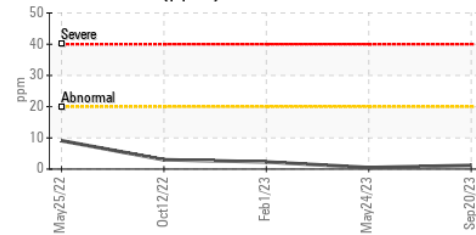


Chromium (ppm)

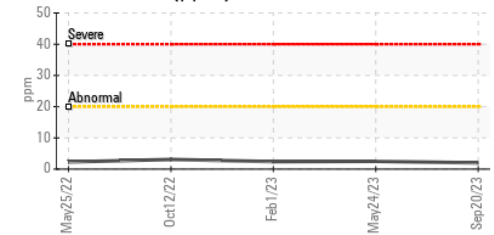


Copper (ppm)

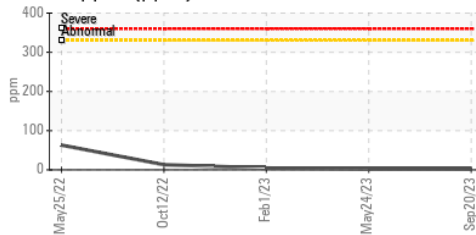


Silicon (ppm)

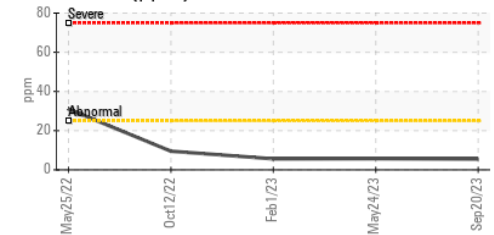

▲ Viscosity @ 100°C

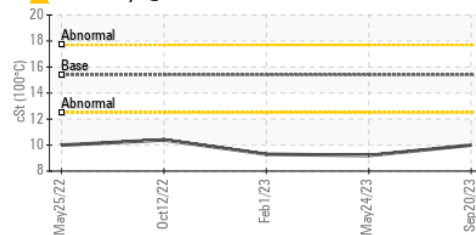

Base Number

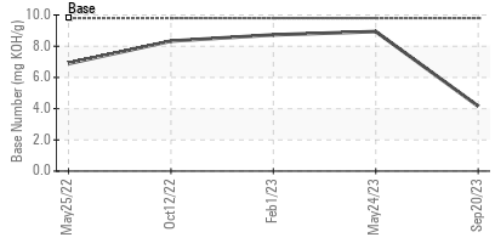

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104692 **Received** : 22 Sep 2023  
**Lab Number** : 05958729 **Diagnosed** : 26 Sep 2023  
**Unique Number** : 10659942 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: PercentFuel )

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: