	PROBLEM SUMMARY	Sample Rating Trend	VIS DEBRIS
EXPERTISE			
Machine Id 2026841			
Component <b>Rear Differential</b> Fluid			
VOLVO ( QTS)		Aug2023	
COMPONENT CONDI	TION SUMMARY		

No relevant graphs to display

REC	COM	<b>MEND</b>	ATIO	N

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC	C TEST	RESULT	S		
Sample Status				ABNORMAL	 
Debris	scalar	*Visual	NONE	A MODER	 

Customer Id: PERPRIPCA Sample No.: PCA0102507 Lab Number: 05958778 Test Package: FLEET



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**



Machine Id **2026841** Component **Rear Differential** Fluid **VOLVO (--- QTS)** 

# DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0102507		
Sample Date		Client Info		21 Aug 2023		
Machine Age	mls	Client Info		0		
Dil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METAL	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>500	98		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	6		
Fitanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	1		
_ead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	1		
Fin	ppm	ASTM D5185m	>10	<1		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		280		
Barium	ppm	ASTM D5185m		0		
Nolybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		10		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		11		
Phosphorus	ppm	ASTM D5185m		1292		
Zinc	ppm	ASTM D5185m		20		
Sulfur	ppm	ASTM D5185m		23846		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	20		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	3		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
√isc @ 40°C	cSt	ASTM D445		105		
52:00) Rev: 1	001	7 (O F IV) D44J	Co			

Report Id: PERPRIPCA [WUSCAR] 05958778 (Generated: 09/30/2023 07:52:00) Rev: 1

Contact/Location: MICHAEL DAVIS - PERPRIPCA



# **OIL ANALYSIS REPORT**

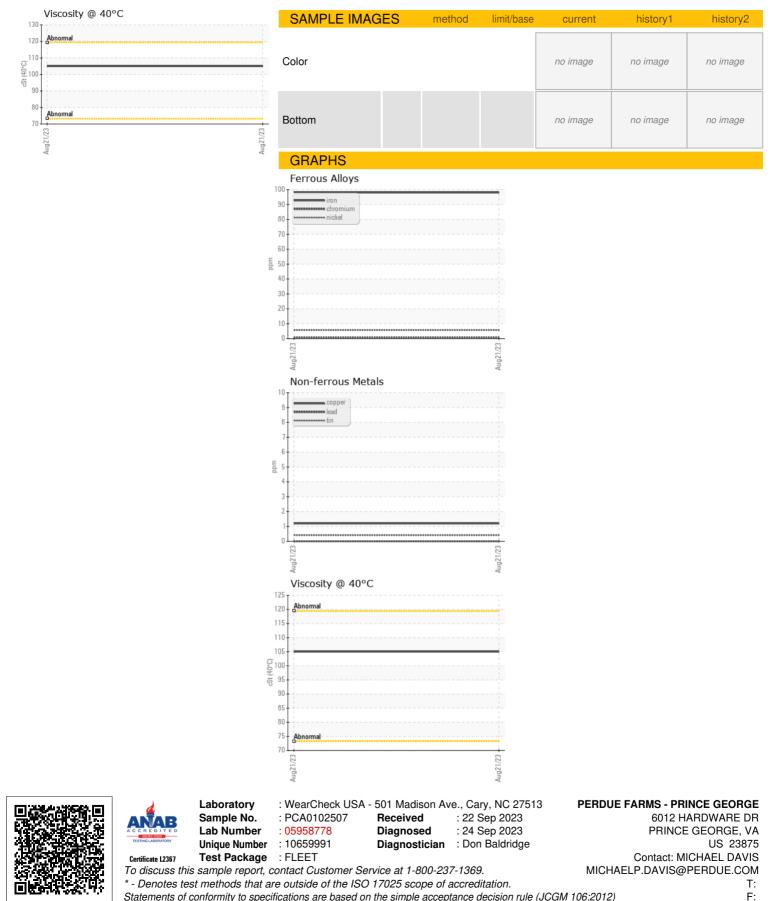

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: MICHAEL DAVIS - PERPRIPCA