


Area
Off-Road
Machine Id
E68

Component
Diesel Engine
Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

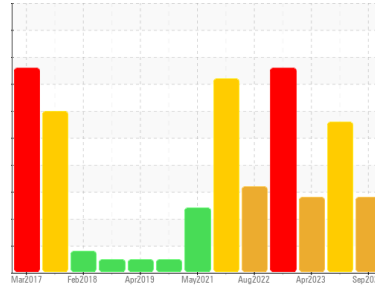

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0090475	PCA0083111	PCA0090486
Sample Date	Client Info	27 Sep 2023	19 Jul 2023	12 Apr 2023
Machine Age	hrs	7871	7435	6974
Oil Age	hrs	4229	4254	4396
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		SEVERE	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >51	20	38	29
Chromium	ppm	ASTM D5185m >11	<1	2	1
Nickel	ppm	ASTM D5185m >5	5	▲ 17	▲ 10
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >31	7	▲ 7	3
Lead	ppm	ASTM D5185m >26	<1	<1	1
Copper	ppm	ASTM D5185m >26	<1	5	<1
Tin	ppm	ASTM D5185m >4	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<1	5	3
Barium	ppm	ASTM D5185m 0	0	2	0
Molybdenum	ppm	ASTM D5185m 60	52	59	57
Manganese	ppm	ASTM D5185m 0	<1	1	<1
Magnesium	ppm	ASTM D5185m 1010	826	869	877
Calcium	ppm	ASTM D5185m 1070	888	1020	1014
Phosphorus	ppm	ASTM D5185m 1150	815	873	921
Zinc	ppm	ASTM D5185m 1270	1044	1132	1135
Sulfur	ppm	ASTM D5185m 2060	2189	2366	2730

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >22	21	▲ 35	▲ 26
Sodium	ppm	ASTM D5185m >31	2	0	3
Potassium	ppm	ASTM D5185m >20	0	<1	<1
Fuel	%	ASTM D3524 >2.1	15.7	9.2	<1.0

INFRA-RED


method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.4	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.5	9.1	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.5	20.3	18.2

FLUID DEGRADATION


method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.1	18.0	15.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	5.11	6.60	9.90

OIL ANALYSIS REPORT


Fuel Dilution

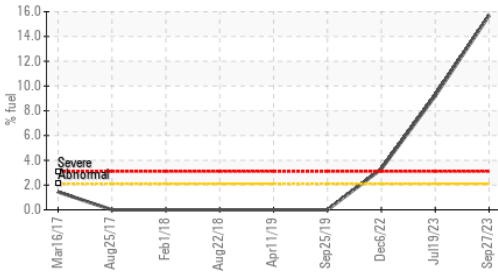

Viscosity @ 100°C

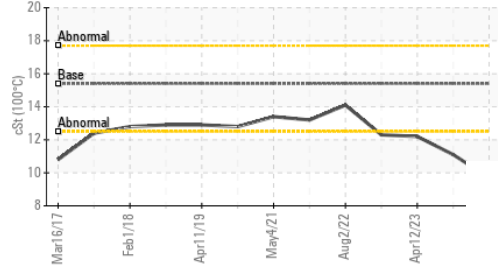

Base Number

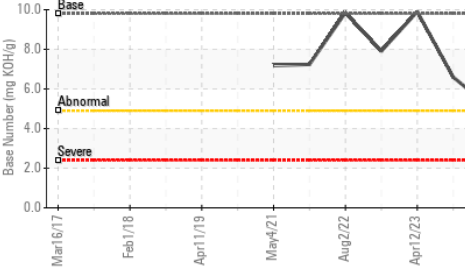

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	9.7	11.1

GRAPHS


Iron (ppm)

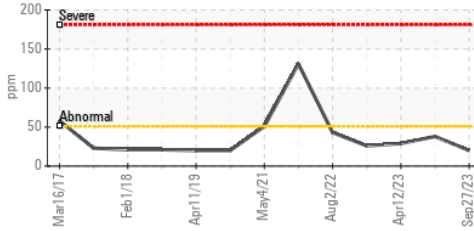


Lead (ppm)

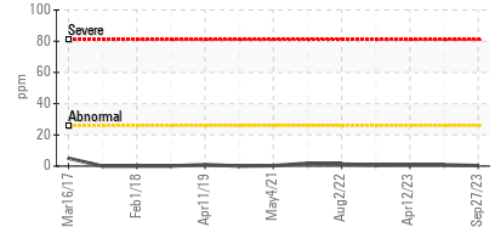


Aluminum (ppm)

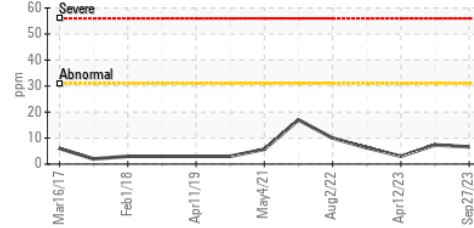


Chromium (ppm)

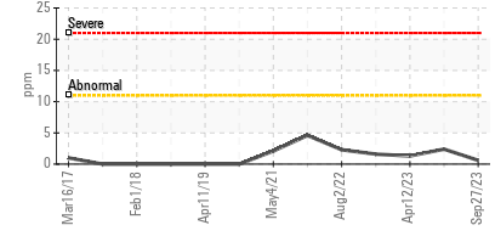


Copper (ppm)

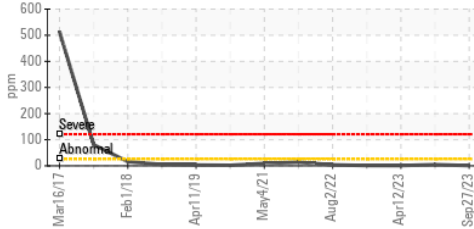


Silicon (ppm)

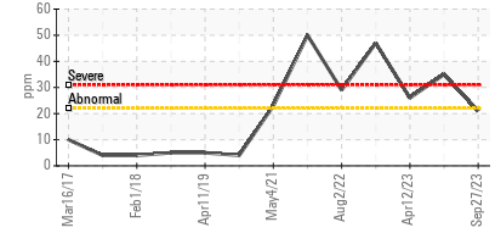

Viscosity @ 100°C

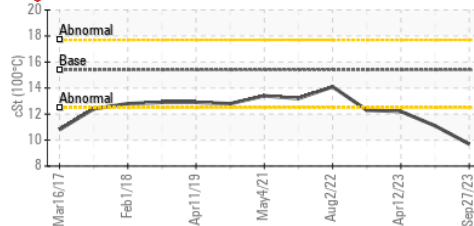

Base Number

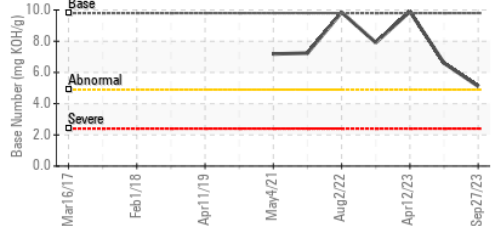

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0090475 **Received** : 29 Sep 2023
Lab Number : 05965551 **Diagnosed** : 03 Oct 2023
Unique Number : 10672102 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: PercentFuel)

WIN Waste Innovations - Shop # - Taunton
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: Dave Wilson
 dwilson@win-waste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: