

OIL ANALYSIS REPORT

Sample Rating Trend



FORD 308 (S/N 1FTRF3B60KEG01455)

Diesel Engine

MOTORCRAFT FULL SYNTHETIC SAE 5W



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| 80 (7 GAL) | | | | Aug2023 | | |
|------------------|----------|-------------|------------|-------------|----------|----------|
| SAMPLE INFOR | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | PCA0100386 | | |
| Sample Date | | Client Info | | 28 Aug 2023 | | |
| Machine Age | mls | Client Info | | 12333 | | |
| Oil Age | mls | Client Info | | 2677 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINAT | ION | method | limit/base | current | history1 | history2 |
| Fuel | | WC Method | >5 | <1.0 | | |
| Glycol | | WC Method | | NEG | | |
| WEAR METAL | _S | method | limit/base | current | history1 | history2 |
| ron | ppm | ASTM D5185m | >100 | 43 | | |
| Chromium | ppm | ASTM D5185m | >20 | <1 | | |
| Nickel | ppm | ASTM D5185m | >2 | 0 | | |
| Titanium | ppm | ASTM D5185m | >2 | <1 | | |
| Silver | ppm | ASTM D5185m | >2 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | | |
| Lead | ppm | ASTM D5185m | >40 | <1 | | |
| Copper | ppm | ASTM D5185m | >330 | 5 | | |
| Γin | ppm | ASTM D5185m | >15 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 58 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 64 | | |
| Manganese | ppm | ASTM D5185m | | 2 | | |
| Magnesium | ppm | ASTM D5185m | | 507 | | |
| Calcium | ppm | ASTM D5185m | | 909 | | |
| Phosphorus | ppm | ASTM D5185m | | 601 | | |
| Zinc | ppm | ASTM D5185m | | 751 | | |
| Sulfur | ppm | ASTM D5185m | | 2879 | | |
| CONTAMINAN | NTS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 14 | | |
| Sodium | ppm | ASTM D5185m | | 10 | | |
| Potassium | ppm | ASTM D5185m | >20 | 3 | | |
| INFRA-RED | | method | limit/base | current | history1 | history2 |
| Soot % | % | *ASTM D7844 | >3 | 0 | | |
| Vitration | Abs/cm | *ASTM D7624 | >20 | 8.2 | | |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.5 | | |
| FLUID DEGRA | DATION | method | limit/base | current | history1 | history2 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 12.1 | | |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 4.8 | | |
| | | | | | | |



OIL ANALYSIS REPORT

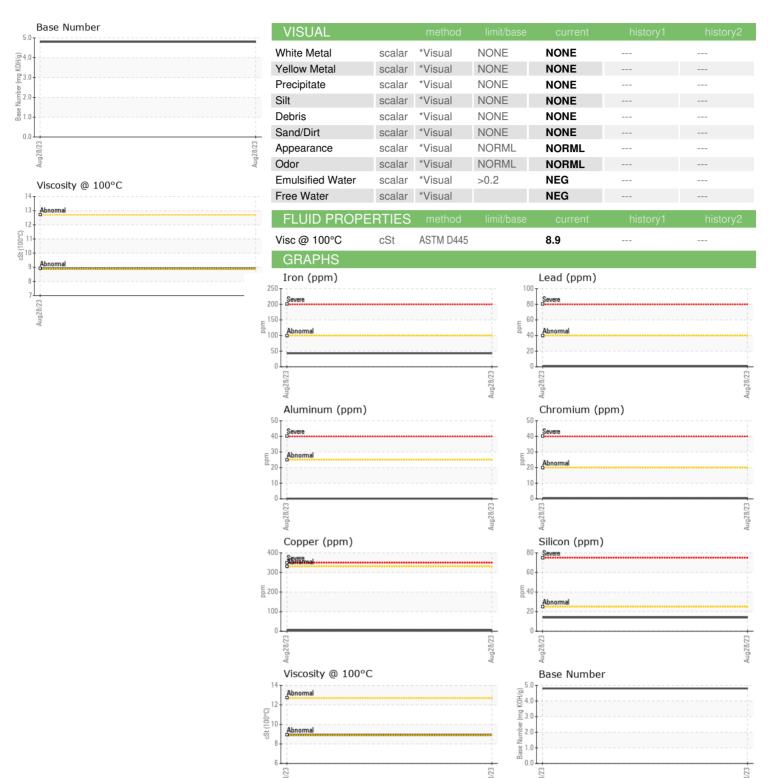





Laboratory Sample No. Lab Number **Unique Number**

: PCA0100386 : 05965902 : 10672453

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Diagnosed

: 02 Oct 2023 Diagnostician : Wes Davis

: 02 Oct 2023

Test Package : MOB 1 (Additional Tests: TBN) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VILLAGE OF NORTH RIVERSIDE

2345 S DESPLAINES NORTH RIVERSIDE, IL US 60546

Contact: Service Manager vznrdpw@gmail.com

T:

F: