




# OIL ANALYSIS REPORT

Sample Rating Trend

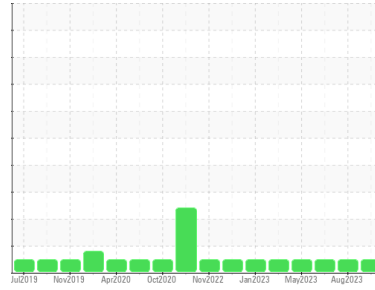

**NORMAL**



Machine Id  
**423036-402352**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0090723</b>	GFL0087204	GFL0083738	
Sample Date	Client Info	<b>26 Sep 2023</b>	15 Aug 2023	08 Jun 2023	
Machine Age	hrs	Client Info	<b>13171</b>	12864	4610
Oil Age	hrs	Client Info	<b>600</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >80	<b>40</b>	35	12
Chromium	ppm	ASTM D5185m >5	<b>3</b>	3	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>11</b>	15	<1
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	3
Copper	ppm	ASTM D5185m >150	<b>7</b>	7	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>0</b>	3	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	62	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1032</b>	1014	1038
Calcium	ppm	ASTM D5185m 1070	<b>1129</b>	1130	1141
Phosphorus	ppm	ASTM D5185m 1150	<b>1027</b>	1014	1083
Zinc	ppm	ASTM D5185m 1270	<b>1343</b>	1261	1352
Sulfur	ppm	ASTM D5185m 2060	<b>3022</b>	3506	3665

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<b>10</b>	16	5
Sodium	ppm	ASTM D5185m	<b>1</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>4</b>	5	5

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>1.2</b>	0.8	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.5</b>	8.1	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.2</b>	20.2	21.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.6</b>	15.0	18.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	8.5	8.3







# OIL ANALYSIS REPORT

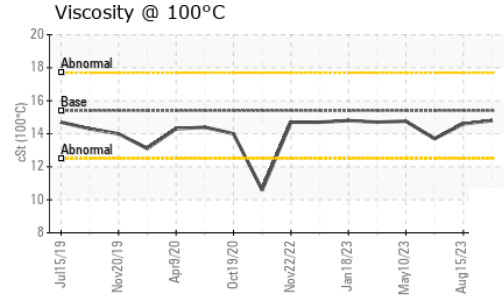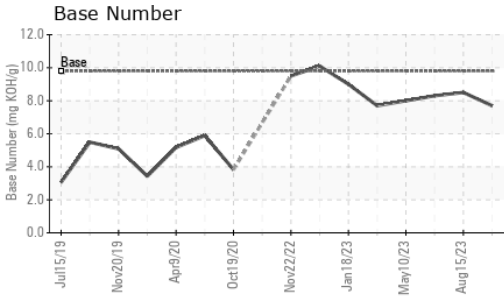

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.8</b>	14.6	13.7

## GRAPHS

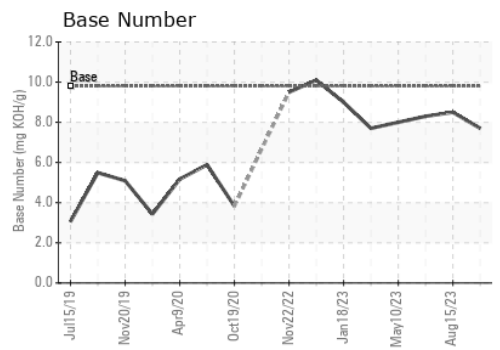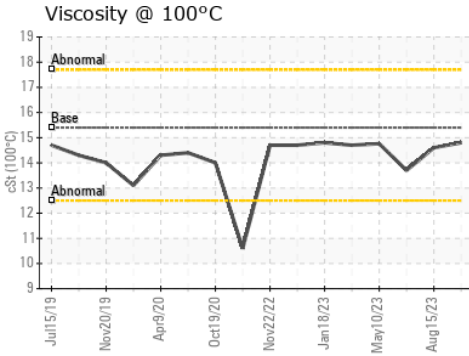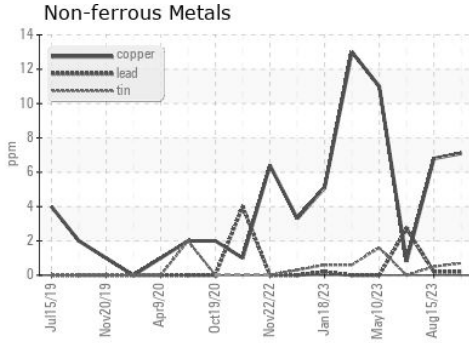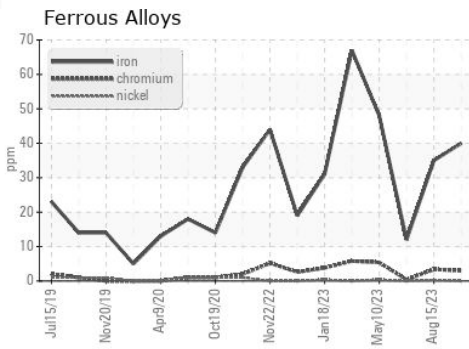

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090723 **Received** : 02 Oct 2023  
**Lab Number** : **05965968** **Diagnosed** : 02 Oct 2023  
**Unique Number** : 10672519 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)