




# OIL ANALYSIS REPORT

Sample Rating Trend

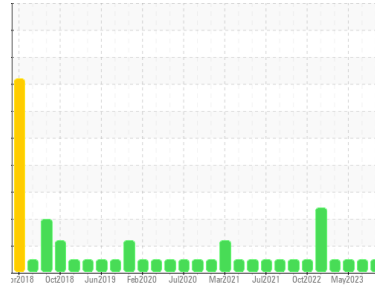

**NORMAL**



Machine Id  
**2702**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0083651</b>	GFL0074589	GFL0074576
Sample Date	Client Info	<b>28 Sep 2023</b>	12 Jul 2023	02 May 2023
Machine Age	hrs	<b>15398</b>	14831	14682
Oil Age	hrs	<b>567</b>	150	577
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >165	<b>12</b>	10	28
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	1
Lead	ppm	ASTM D5185m >150	<b>2</b>	<1	1
Copper	ppm	ASTM D5185m >90	<b>8</b>	3	2
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>2</b>	6	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>68</b>	64	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>954</b>	849	911
Calcium	ppm	ASTM D5185m 1070	<b>1053</b>	1058	1057
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	979	992
Zinc	ppm	ASTM D5185m 1270	<b>1280</b>	1131	1220
Sulfur	ppm	ASTM D5185m 2060	<b>3151</b>	3003	3414

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >35	<b>6</b>	5	12
Sodium	ppm	ASTM D5185m	<b>4</b>	1	3
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	2

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >7.5	<b>0.5</b>	0.3	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	6.7	8.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	18.1	18.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.2</b>	13.9	15.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.2</b>	8.3	6.5







# OIL ANALYSIS REPORT

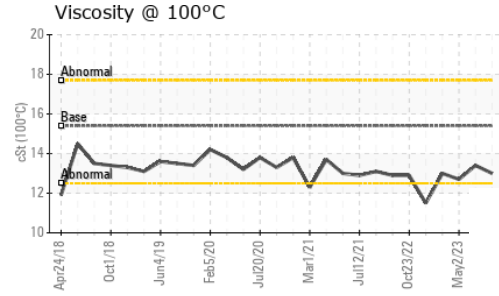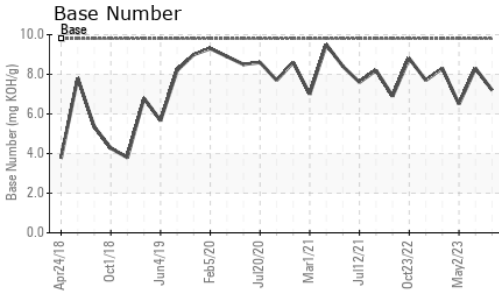

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	13.4	12.7

## GRAPHS

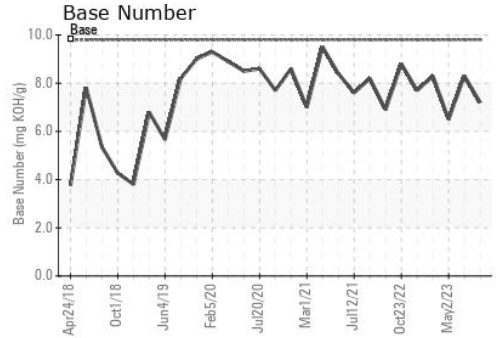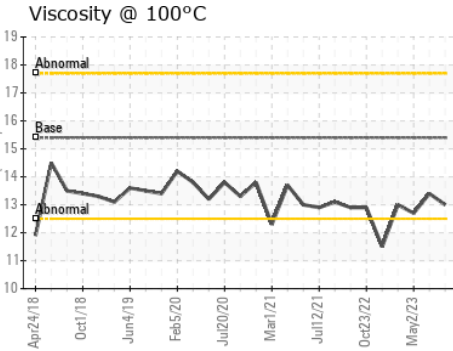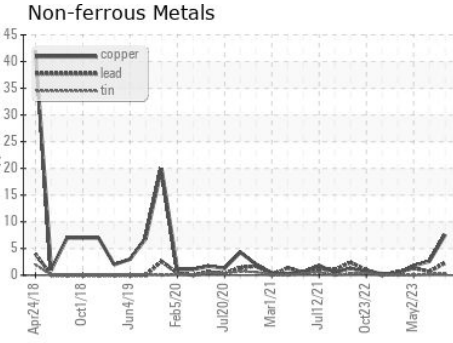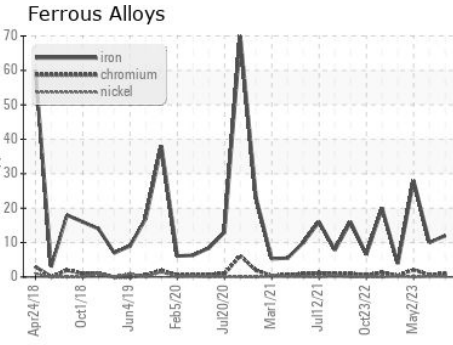

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083651  
**Lab Number** : **05966002**  
**Unique Number** : 10672553  
**Test Package** : FLEET

**GFL Environmental - 095 - Atlanta West**  
 2699 Cochran Industrial Blvd  
 Douglasville, GA  
 US 30127-1332  
 Contact: Darrell Welch  
 darrell.welch@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)