




# OIL ANALYSIS REPORT

Sample Rating Trend

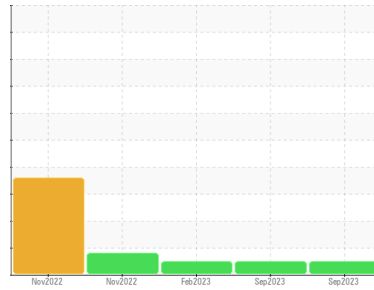

**NORMAL**



Machine Id  
**913006**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0083860</b>	GFL0061547	GFL0061554
Sample Date	Client Info		<b>27 Sep 2023</b>	11 Sep 2023	06 Feb 2023
Machine Age	hrs	Client Info	<b>3336</b>	3200	765
Oil Age	hrs	Client Info	<b>3336</b>	3200	765
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>8</b>	47	26
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	4
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	19	87
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>9</b>	0	6
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>58</b>	60	62
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 450	<b>906</b>	871	778
Calcium	ppm	ASTM D5185m 3000	<b>1027</b>	1070	1054
Phosphorus	ppm	ASTM D5185m 1150	<b>996</b>	952	813
Zinc	ppm	ASTM D5185m 1350	<b>1194</b>	1206	1047
Sulfur	ppm	ASTM D5185m 4250	<b>2938</b>	2392	1989

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	8	2
Sodium	ppm	ASTM D5185m >216	<b>&lt;1</b>	8	<1
Potassium	ppm	ASTM D5185m >20	<b>5</b>	10	12

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	1	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.6</b>	12.2	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	24.4	20.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	24.0	17.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.3</b>	3.8	6.2







# OIL ANALYSIS REPORT

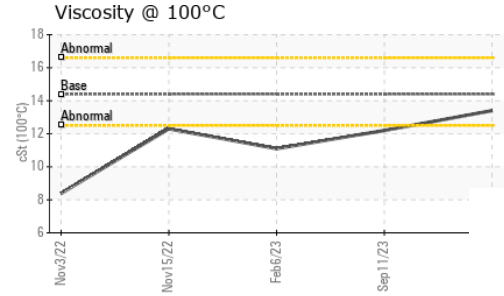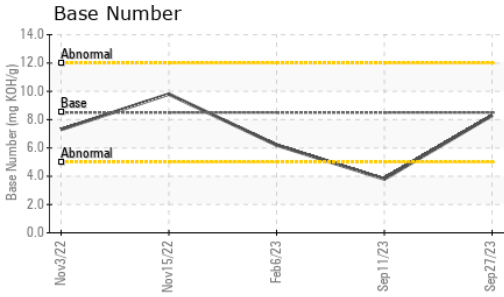

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	12.2

## GRAPHS

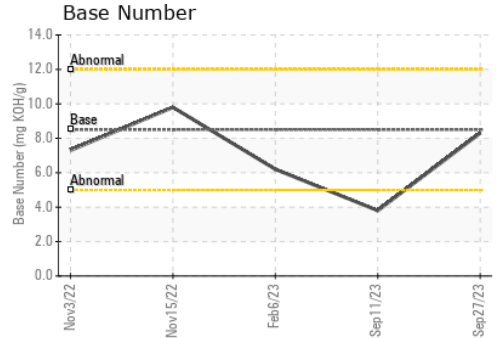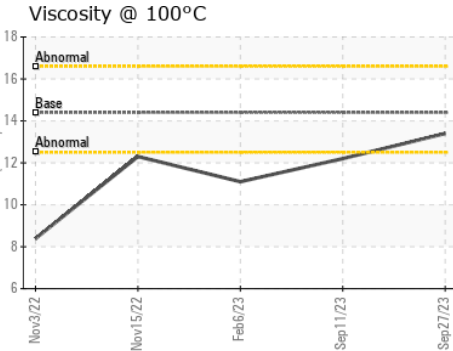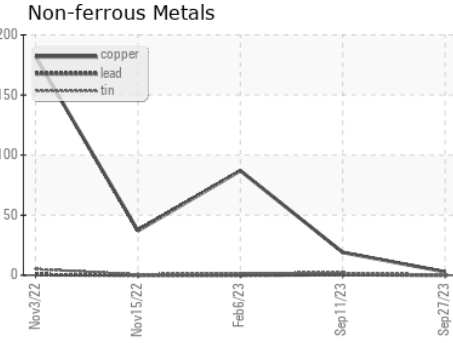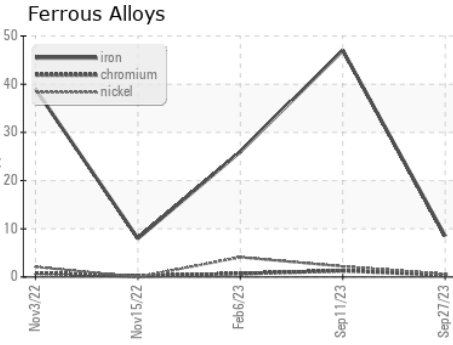

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083860 **Received** : 02 Oct 2023  
**Lab Number** : 05966024 **Diagnosed** : 02 Oct 2023  
**Unique Number** : 10672575 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)