



# PROBLEM SUMMARY

Sample Rating Trend


GLYCOL



Machine Id  
**10443**


Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

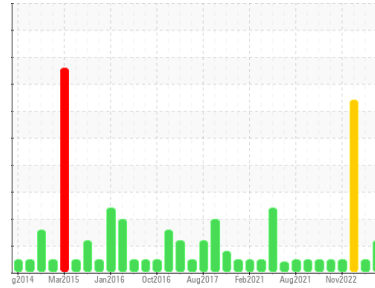

## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

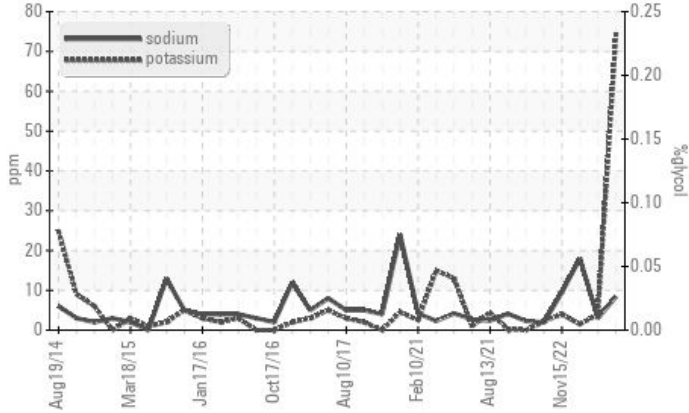

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	ABNORMAL
Potassium	ppm	ASTM D5185m	>20	▲ 74	4	2

Customer Id: GFL018  
Sample No.: GFL0074444  
Lab Number: 05966031  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

**04 Jul 2023 Diag: Wes Davis**

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



**07 Apr 2023 Diag: Jonathan Hester**

WATER



Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Fuel content negligible. There is a light concentration of water present in the oil. The oil viscosity is lower than normal. Additive levels indicate the addition of a different brand, or type of oil. The BN level is low. Confirm oil type.

view report



**15 Nov 2022 Diag: Angela Borella**

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is a trace of moisture present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

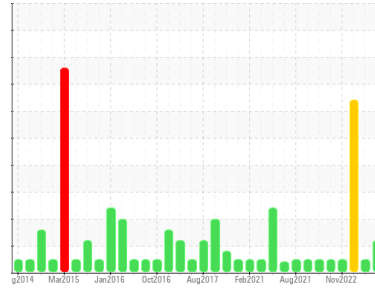

GLYCOL



Machine Id  
**10443**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0074444</b>	GFL0066837	GFL0074417
Sample Date	Client Info		<b>29 Sep 2023</b>	04 Jul 2023	07 Apr 2023
Machine Age	hrs	Client Info	<b>57347</b>	57347	57347
Oil Age	hrs	Client Info	<b>57347</b>	57347	57347
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	1.5

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>15</b>	16	29
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>4</b>	3	8
Lead	ppm	ASTM D5185m >25	<b>0</b>	<1	13
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	2	14
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>44</b>	2	41
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>36</b>	64	▲ 16
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>550</b>	1018	▲ 164
Calcium	ppm	ASTM D5185m 1070	<b>1470</b>	1087	▲ 634
Phosphorus	ppm	ASTM D5185m 1150	<b>1016</b>	1118	▲ 409
Zinc	ppm	ASTM D5185m 1270	<b>1231</b>	1355	▲ 311
Sulfur	ppm	ASTM D5185m 2060	<b>3356</b>	3957	2294

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	5	18
Sodium	ppm	ASTM D5185m	<b>8</b>	3	18
Potassium	ppm	ASTM D5185m >20	▲ <b>74</b>	4	2
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>1.4</b>	1.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.9</b>	7.5	7.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	20.2	26.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	14.5	▲ 28.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.6</b>	9.7	▲ 2.6







# OIL ANALYSIS REPORT

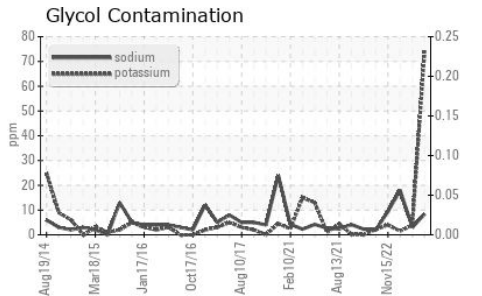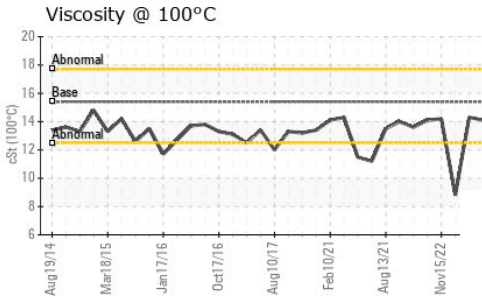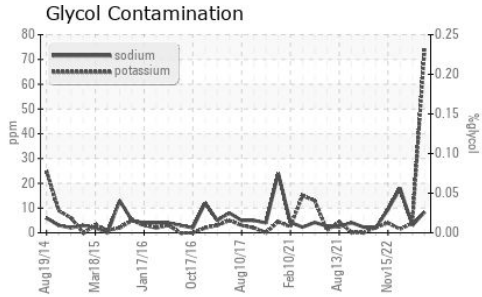

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.3 ▲ 8.8

## GRAPHS

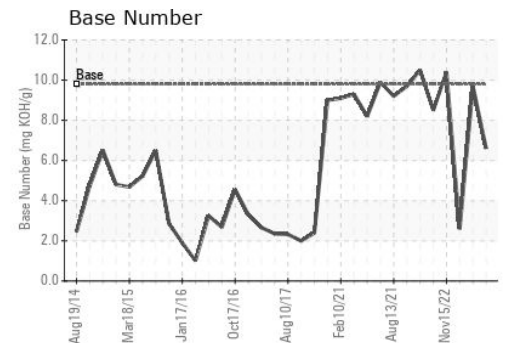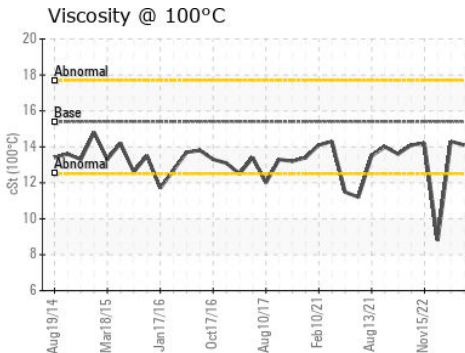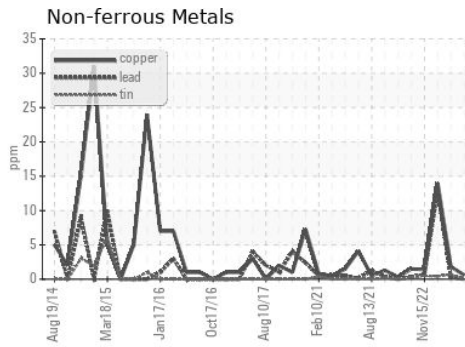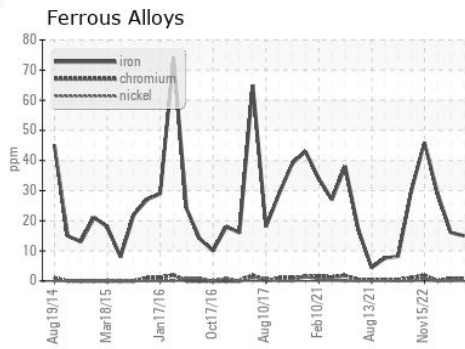

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0074444 **Received** : 02 Oct 2023  
**Lab Number** : 05966031 **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10672582 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 018 - Fayetteville**  
 4621 Marracco Drive  
 Hope Mills, NC  
 US 28348  
 Contact: Robert Carter  
 robert.carter@gflenv.com  
 T: (910)596-1170  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)