




OIL ANALYSIS REPORT

Sample Rating Trend

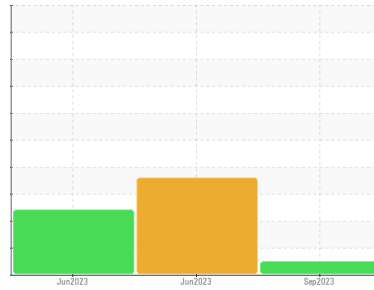

NORMAL



Machine Id
933034

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0084665	GFL0084718	GFL0084573	
Sample Date	Client Info	28 Sep 2023	16 Jun 2023	05 Jun 2023	
Machine Age	mls	Client Info	15030	0	1728
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info	Changed	Not Changd	Not Changd	
Sample Status		NORMAL	ABNORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	16	29	25
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	16	▲ 13	▲ 10
Lead	ppm	ASTM D5185m	>40	1	<1	0
Copper	ppm	ASTM D5185m	>330	4	13	13
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	5	28	39
Barium	ppm	ASTM D5185m	0	0	<1	1
Molybdenum	ppm	ASTM D5185m	60	57	47	47
Manganese	ppm	ASTM D5185m	0	2	13	13
Magnesium	ppm	ASTM D5185m	1010	634	775	794
Calcium	ppm	ASTM D5185m	1070	1683	1248	1270
Phosphorus	ppm	ASTM D5185m	1150	701	750	764
Zinc	ppm	ASTM D5185m	1270	989	914	943
Sulfur	ppm	ASTM D5185m	2060	2456	2863	3009

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	9	▲ 35	▲ 34
Sodium	ppm	ASTM D5185m		8	4	5
Potassium	ppm	ASTM D5185m	>20	63	▲ 62	42

INFRA-RED


method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	11.1	9.6	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	20.7	20.6

FLUID DEGRADATION


method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.5	18.7	18.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	4.1	8.0	8.4




OIL ANALYSIS REPORT

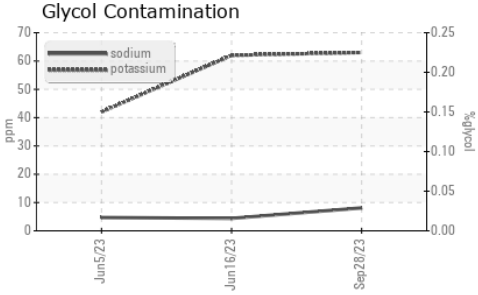





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

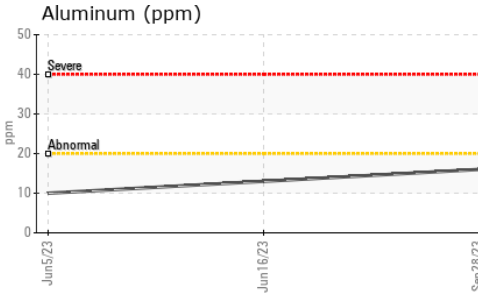

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	15.0	14.3	14.1

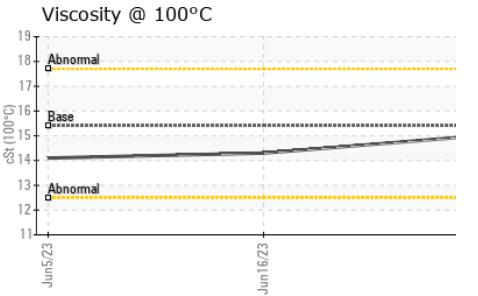

GRAPHS

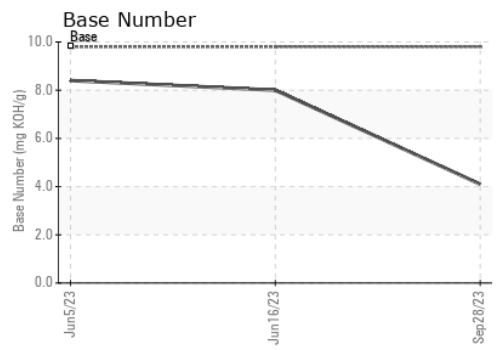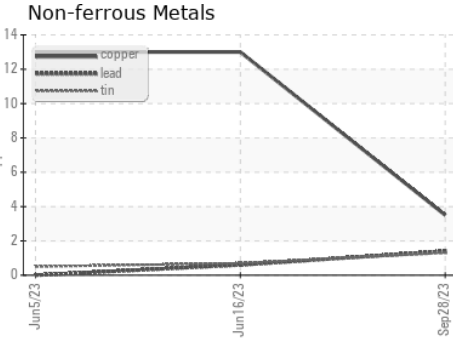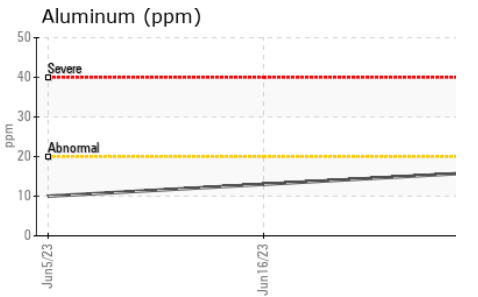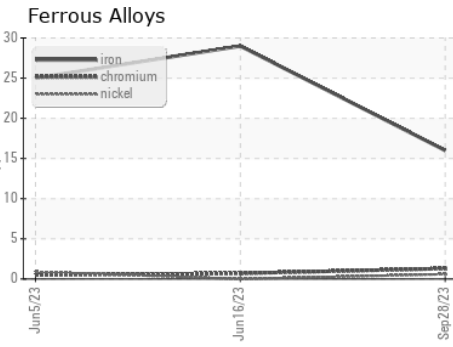

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0084665 **Received** : 02 Oct 2023
Lab Number : 05966841 **Diagnosed** : 04 Oct 2023
Unique Number : 10673392 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Apolinar Zacarias
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: