




# OIL ANALYSIS REPORT

Sample Rating Trend

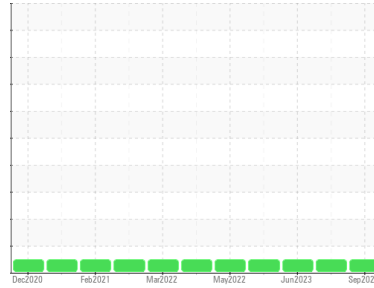

**NORMAL**



Machine Id  
**525012-7003**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0091768</b>	GFL0086556	GFL0086587
Sample Date	Client Info	<b>29 Sep 2023</b>	27 Sep 2023	21 Jun 2023
Machine Age	hrs	<b>16802</b>	16793	15002
Oil Age	hrs	<b>16802</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >90	<b>8</b>	32	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	4	<1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	4	0
Copper	ppm	ASTM D5185m >330	<b>4</b>	2	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>2</b>	<1	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	66	62
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>926</b>	940	950
Calcium	ppm	ASTM D5185m 1070	<b>1033</b>	1072	1121
Phosphorus	ppm	ASTM D5185m 1150	<b>1048</b>	1026	1017
Zinc	ppm	ASTM D5185m 1270	<b>1266</b>	1293	1201
Sulfur	ppm	ASTM D5185m 2060	<b>3522</b>	3276	3447

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>4</b>	7	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	5	1
Potassium	ppm	ASTM D5185m >20	<b>5</b>	2	0

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >6	<b>0.2</b>	0.7	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	10.3	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	22.0	19.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	17.4	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.0</b>	6.4	8.8







# OIL ANALYSIS REPORT

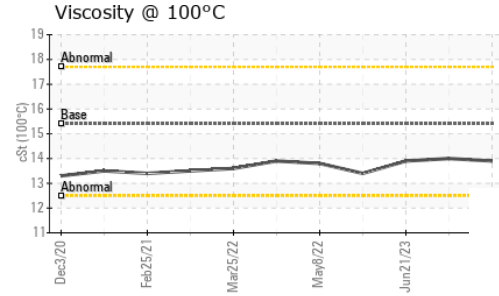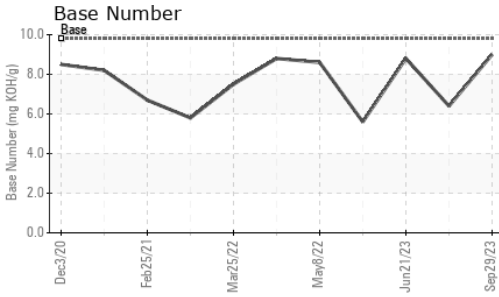

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.0	13.9

## GRAPHS

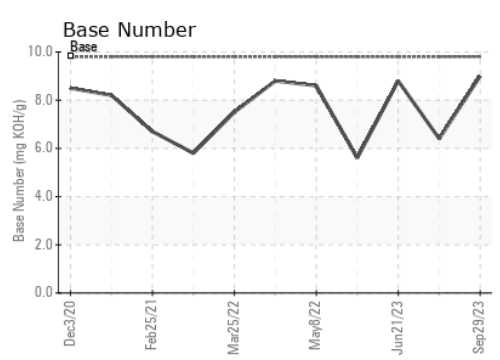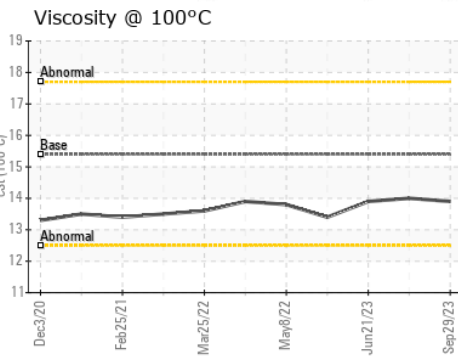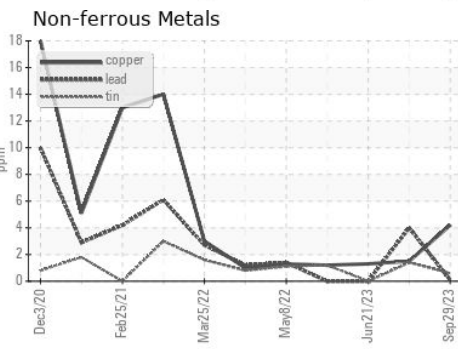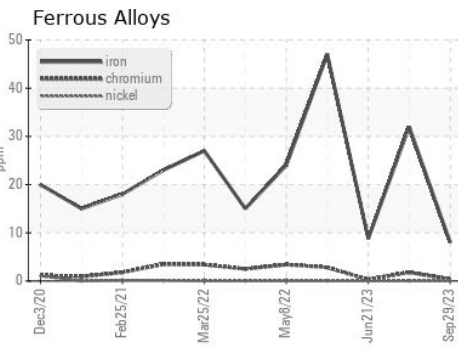

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091768 **Received** : 03 Oct 2023  
**Lab Number** : **05967337** **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10673888 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 654 - Richmond Hauling**  
 11800 Lewis Road  
 Chester, VA  
 US 23831  
 Contact: Jimmy Mayes  
 jmayes@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)