




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**427080-402341**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

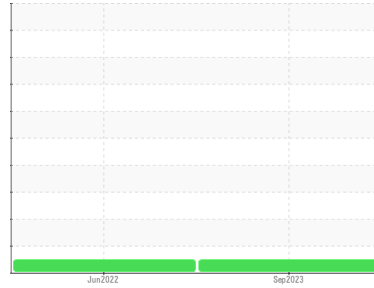

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0094117</b>	GFL0048614	---
Sample Date	Client Info	<b>27 Sep 2023</b>	13 Jun 2022	---
Machine Age	mls Client Info	<b>405095</b>	6547	---
Oil Age	mls Client Info	<b>405095</b>	0	---
Oil Changed	Client Info	<b>Changed</b>	Changed	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >220	<b>62</b>	157	---
Chromium	ppm ASTM D5185m >2	<b>0</b>	<1	---
Nickel	ppm ASTM D5185m >5	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>0</b>	0	---
Silver	ppm ASTM D5185m >5	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >75	<b>14</b>	25	---
Lead	ppm ASTM D5185m >95	<b>2</b>	5	---
Copper	ppm ASTM D5185m >60	<b>36</b>	89	---
Tin	ppm ASTM D5185m >10	<b>&lt;1</b>	3	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>76</b>	46	---
Barium	ppm ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m	<b>&lt;1</b>	3	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	1	---
Magnesium	ppm ASTM D5185m	<b>7</b>	14	---
Calcium	ppm ASTM D5185m	<b>128</b>	132	---
Phosphorus	ppm ASTM D5185m	<b>219</b>	201	---
Zinc	ppm ASTM D5185m	<b>25</b>	102	---
Sulfur	ppm ASTM D5185m	<b>1548</b>	1061	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	9	---
Sodium	ppm ASTM D5185m	<b>3</b>	2	---
Potassium	ppm ASTM D5185m >20	<b>1</b>	3	---

## VISUAL


method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar *Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar *Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar *Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar *Visual NONE	<b>NONE</b>	LIGHT	---
Sand/Dirt	scalar *Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar *Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar *Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar *Visual >0.1	<b>NEG</b>	NEG	---
Free Water	scalar *Visual	<b>NEG</b>	NEG	---

## FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 35.0	<b>32.0</b>	29.7	---






# OIL ANALYSIS REPORT

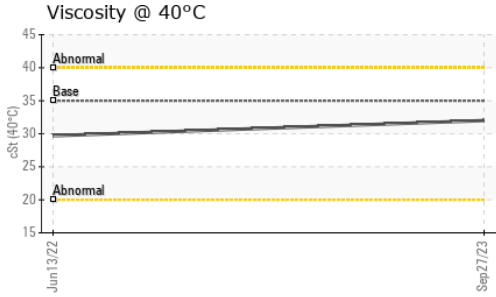

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

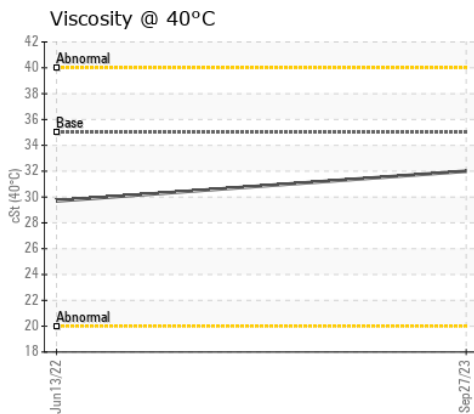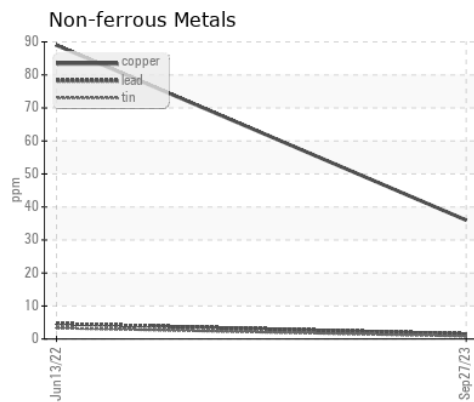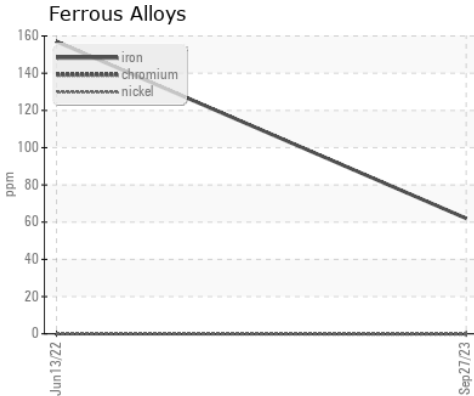

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0094117     **Received** : 03 Oct 2023  
**Lab Number** : 05968161     **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10674712     **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: Gino Griego  
 ggriego@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)