




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

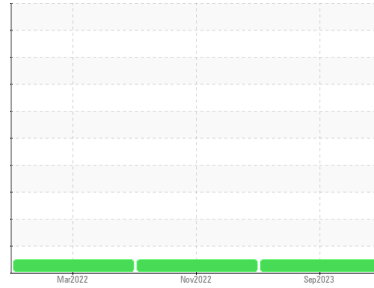

Machine Id  
**429078**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0090925</b>	GFL0062014	GFL0031146	
Sample Date	Client Info	<b>28 Sep 2023</b>	01 Nov 2022	04 Mar 2022	
Machine Age	hrs	Client Info	<b>17081</b>	17006	16936
Oil Age	hrs	Client Info	<b>75</b>	70	650
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>8</b>	7	22
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	3
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m >330	<b>4</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>29</b>	9	25
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>65</b>	62	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>910</b>	916	952
Calcium	ppm	ASTM D5185m 1070	<b>1077</b>	1133	1326
Phosphorus	ppm	ASTM D5185m 1150	<b>1056</b>	1036	1159
Zinc	ppm	ASTM D5185m 1270	<b>1273</b>	1256	1422
Sulfur	ppm	ASTM D5185m 2060	<b>3187</b>	3746	2776

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>6</b>	4	6
Sodium	ppm	ASTM D5185m	<b>15</b>	4	11
Potassium	ppm	ASTM D5185m >20	<b>20</b>	2	10

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.4</b>	7.4	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.3</b>	19.9	19.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	15.4	15.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	9.7	8.2







# OIL ANALYSIS REPORT

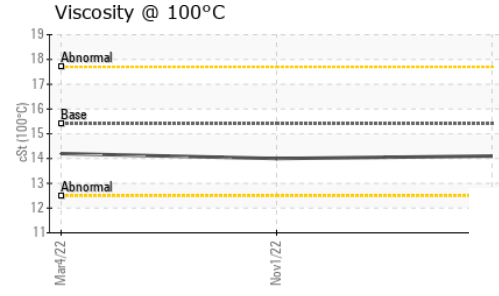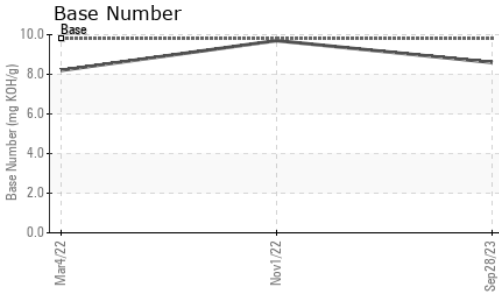

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.0	14.2

## GRAPHS

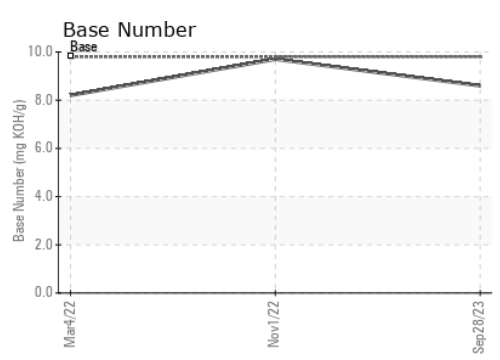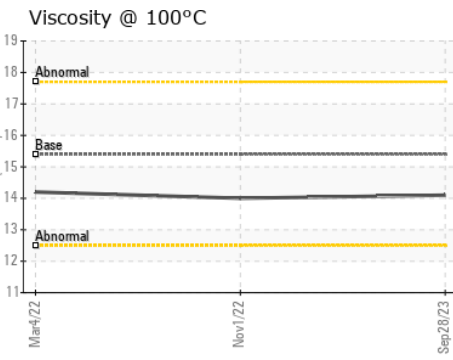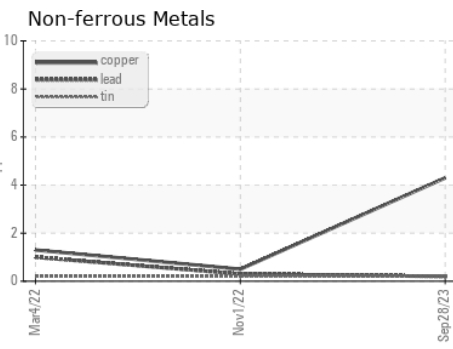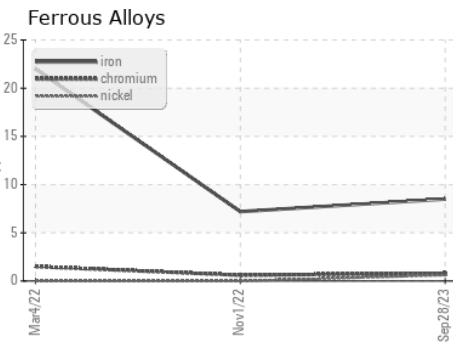

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090925     **Received** : 03 Oct 2023  
**Lab Number** : **05968307**     **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10674858     **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 656 - Culpeper Hauling**  
 15490 Montanus Drive  
 Culpeper, VA  
 US 22701  
 Contact: Matt Hanna  
 mhanna@gflenv.com  
 T: (540)727-0887  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)