




PROBLEM SUMMARY




Machine Id
414063
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

Sample Rating Trend

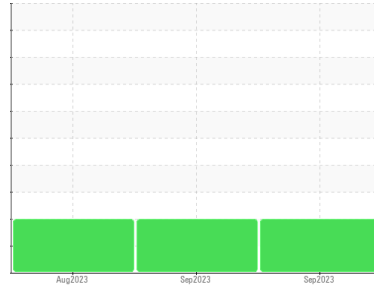


COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

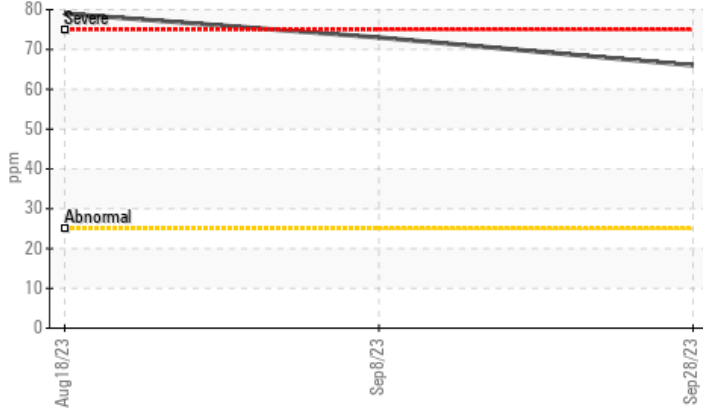

▲ Viscosity @ 100°C

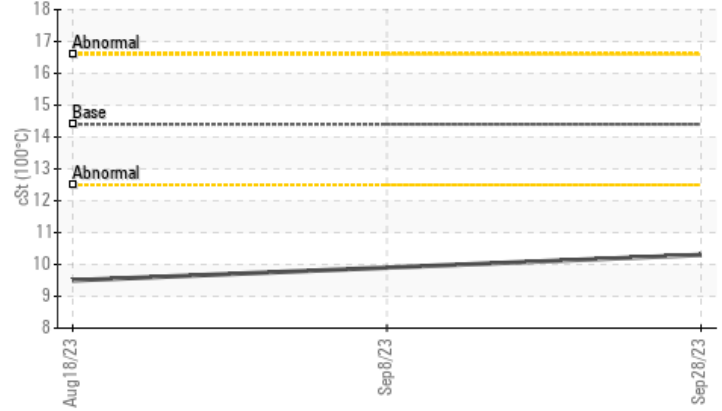

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Silicon	ppm	ASTM D5185m	>25	▲ 66	▲ 73	▲ 79
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 10.3	▲ 9.9	▲ 9.5

Customer Id: GFL180
 Sample No.: GFL0078679
 Lab Number: 05970033
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

08 Sep 2023 Diag: Don Baldrige

DIRT



No corrective action is recommended at this time. Resample at the next service interval to monitor. Metal levels are typical for a new component breaking in. Elemental level of silicon (Si) above normal indicating ingress of seal material. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

view report



18 Aug 2023 Diag: Sean Felton

DIRT



No corrective action is recommended at this time. Resample at the next service interval to monitor. Metal levels are typical for a new component breaking in. Elemental level of silicon (Si) above normal indicating ingress of seal material. Tests indicate that there is no fuel present in the oil. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

view report






OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Machine Id
414063
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

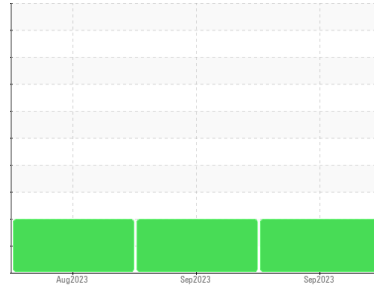

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0078679	GFL0086324	GFL0086326
Sample Date	Client Info	28 Sep 2023	08 Sep 2023	18 Aug 2023
Machine Age	hrs	456	327	169
Oil Age	hrs	456	327	169
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	28	26	22
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	2	2	1
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	<1	<1	<1
Aluminum	ppm	ASTM D5185m >20	12	7	12
Lead	ppm	ASTM D5185m >40	0	1	0
Copper	ppm	ASTM D5185m >330	141	113	64
Tin	ppm	ASTM D5185m >15	2	2	2
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	247	315	424
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	120	121	121
Manganese	ppm	ASTM D5185m	4	4	4
Magnesium	ppm	ASTM D5185m 450	721	767	739
Calcium	ppm	ASTM D5185m 3000	1367	1546	1471
Phosphorus	ppm	ASTM D5185m 1150	709	720	687
Zinc	ppm	ASTM D5185m 1350	882	875	814
Sulfur	ppm	ASTM D5185m 4250	2599	2919	2844

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	▲ 66	▲ 73	▲ 79
Sodium	ppm	ASTM D5185m >158	5	4	4
Potassium	ppm	ASTM D5185m >20	27	27	22
Fuel	%	ASTM D3524 >3.0	<1.0	<1.0	0.3

INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	0.2	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.0	7.4	6.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.2	24.1	26.0

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.2	19.8	20.8
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.6	8.9	9.6







OIL ANALYSIS REPORT

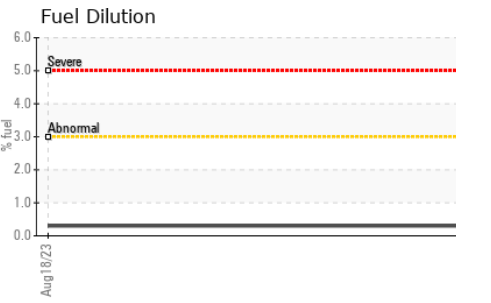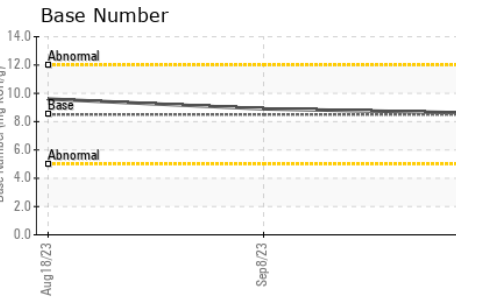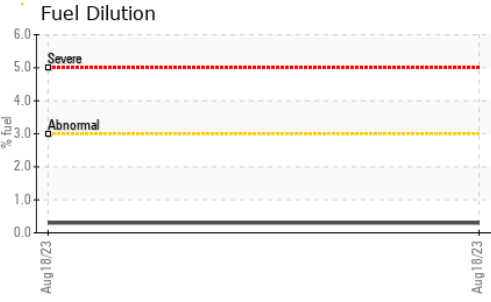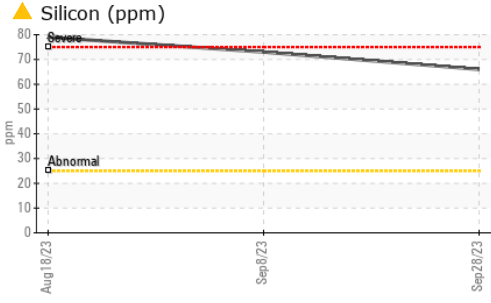

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 10.3	▲ 9.9

GRAPHS

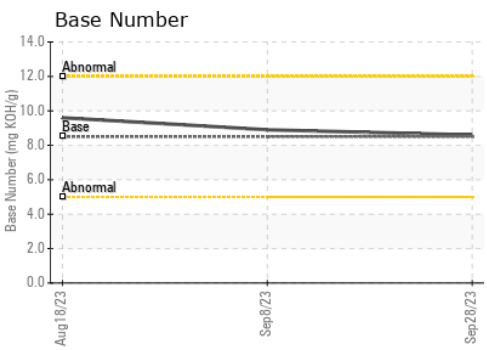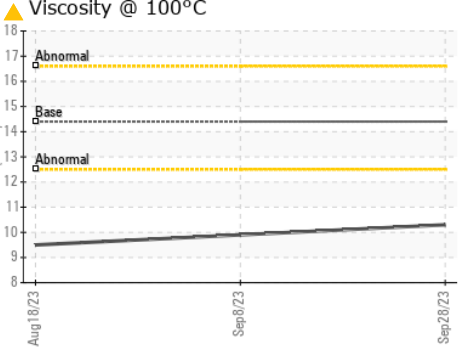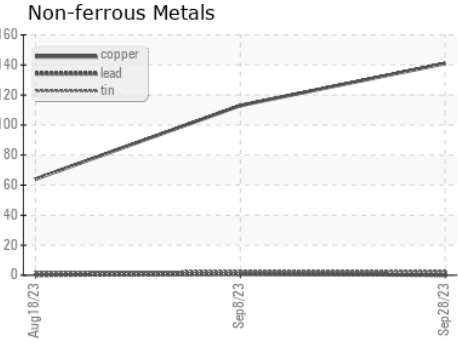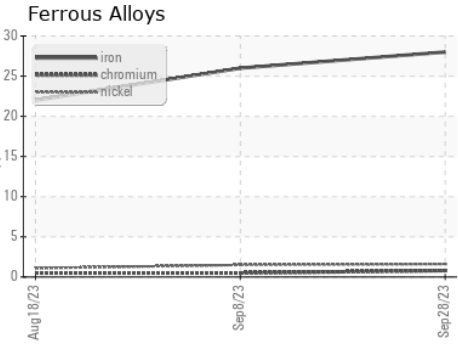

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0078679 **Received** : 05 Oct 2023
Lab Number : 05970033 **Diagnosed** : 09 Oct 2023
Unique Number : 10681983 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 180 - Tuscaloosa Hauling
 4701 12TH ST NE
 Tuscaloosa, AL
 US 35404
Contact: FREDERICK ROGERS
 fred.rogers@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)