


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

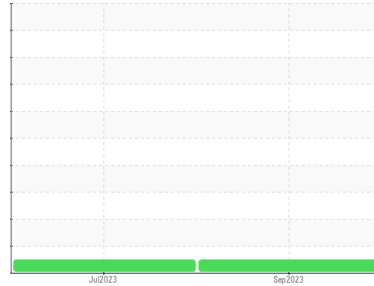

Machine Id  
**VOLVO VNL 162 (S/N 4V4NC9EH6PN304371)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0097422</b>	PCA0097647	---
Sample Date	Client Info			<b>28 Sep 2023</b>	14 Jul 2023	---
Machine Age	mls	Client Info		<b>259000</b>	232000	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>6.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>22</b>	16	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>4</b>	4	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	63	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>923</b>	1032	---
Calcium	ppm	ASTM D5185m	1050	<b>989</b>	1157	---
Phosphorus	ppm	ASTM D5185m	995	<b>961</b>	1095	---
Zinc	ppm	ASTM D5185m	1180	<b>1192</b>	1307	---
Sulfur	ppm	ASTM D5185m	2600	<b>3151</b>	3585	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	<1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.1</b>	9.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.2</b>	20.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	17.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.4</b>	6.6	---





# OIL ANALYSIS REPORT

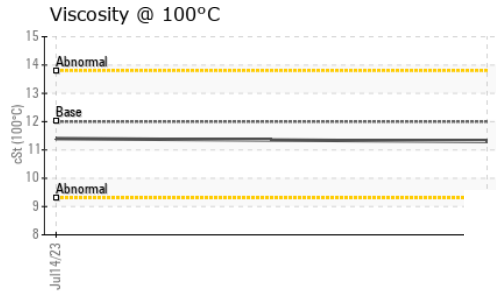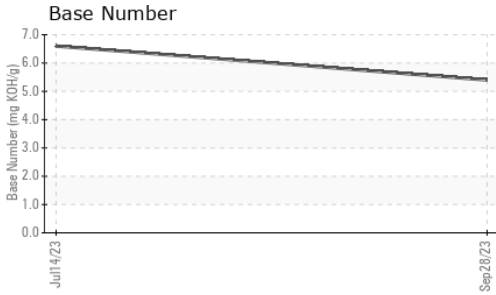

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.3</b>	11.4	---

## GRAPHS

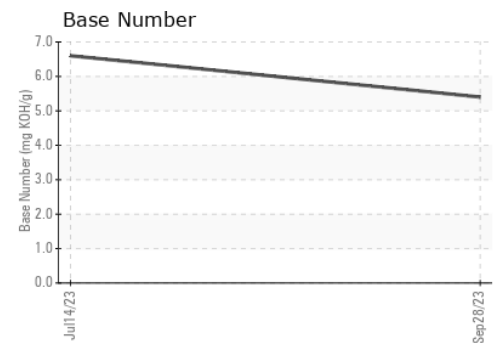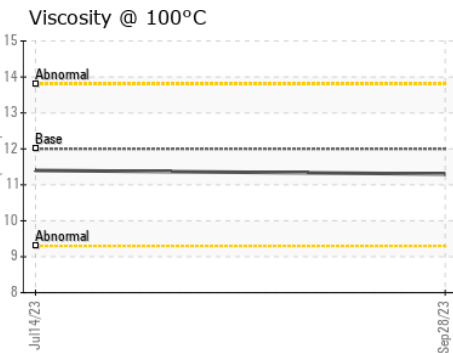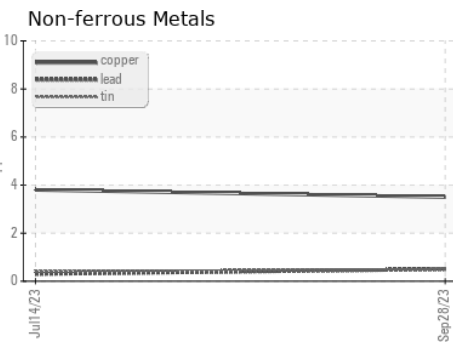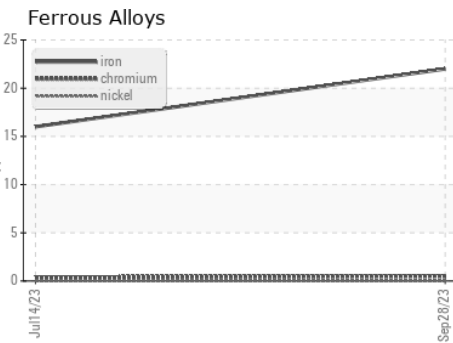

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0097422 **Received** : 06 Oct 2023  
**Lab Number** : **05971948** **Diagnosed** : 09 Oct 2023  
**Unique Number** : 10683898 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**TVA REPAIR LLC**  
 13915 W ROUTE 30  
 PLAINFIELD, IL  
 US 60544

Contact: JOSHUA HUBBARD  
 joshua@tvarepairllc.com  
 T: (815)306-0330  
 F: