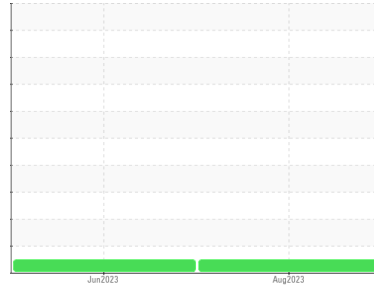


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

 Machine Id  
**VOLVO VNL 153 (S/N 4V4NC9EH1NN304338)**

 Component  
**Diesel Engine**

 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**
**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

Metal levels are typical for a new component breaking in.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0097595</b>	PCA0097581	---
Sample Date	Client Info			<b>24 Aug 2023</b>	24 Jun 2023	---
Machine Age	mls	Client Info		<b>290000</b>	274000	---
Oil Age	mls	Client Info		<b>16000</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>13</b>	24	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	0	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	6	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>66</b>	65	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>986</b>	976	---
Calcium	ppm	ASTM D5185m	1050	<b>1086</b>	1110	---
Phosphorus	ppm	ASTM D5185m	995	<b>1091</b>	1043	---
Zinc	ppm	ASTM D5185m	1180	<b>1318</b>	1297	---
Sulfur	ppm	ASTM D5185m	2600	<b>3560</b>	3334	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	---
Sodium	ppm	ASTM D5185m		<b>2</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	17	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	9.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.4</b>	21.6	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.1</b>	18.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.2</b>	7.0	---





# OIL ANALYSIS REPORT

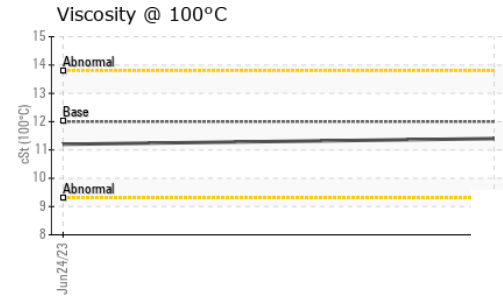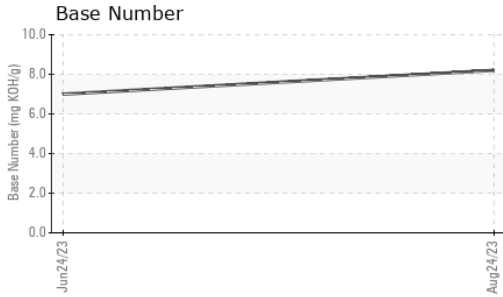

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.2

## GRAPHS

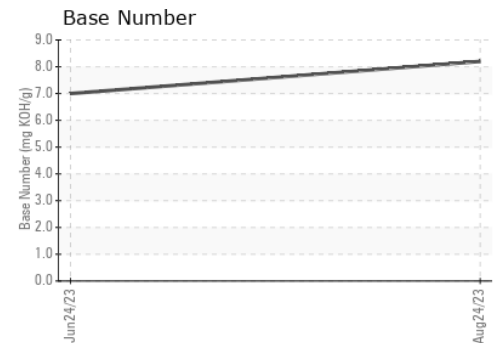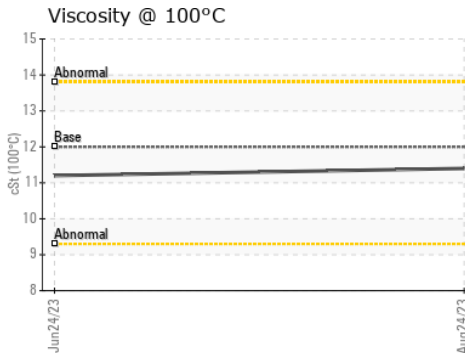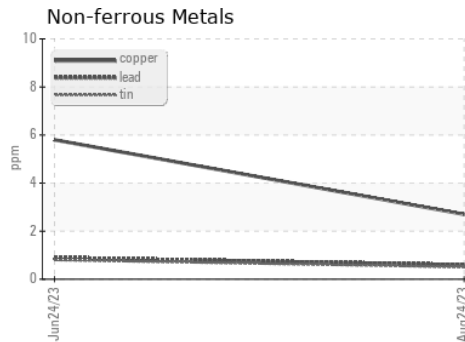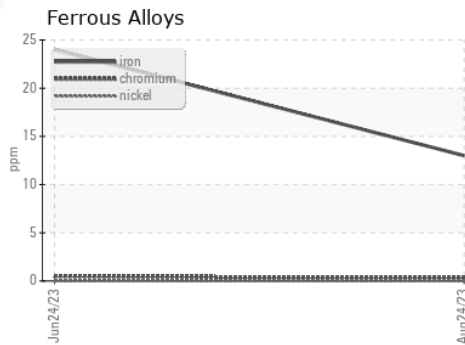

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0097595 **Received** : 06 Oct 2023  
**Lab Number** : **05972011** **Diagnosed** : 09 Oct 2023  
**Unique Number** : 10683961 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**TVA REPAIR LLC**  
 13915 W ROUTE 30  
 PLAINFIELD, IL  
 US 60544

Contact: JOSHUA HUBBARD  
 joshua@tvarepairllc.com  
 T: (815)306-0330  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)