


OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Area
Wamble
Machine Id
JOHN DEERE 644P 244 (S/N 1DW644PAANLZ15485)
Component
Transmission (Auto)
Fluid
JOHN DEERE HY-GARD HYD/TRANS (6 GAL)

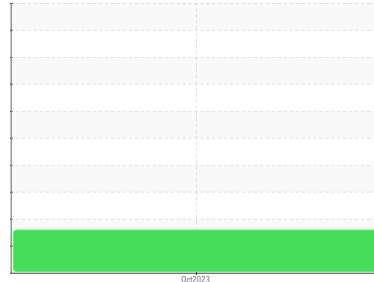

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0096417	---	---
Sample Date	Client Info	04 Oct 2023	---	---
Machine Age	hrs	Client Info	2000	---
Oil Age	hrs	Client Info	2000	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	21	---
Chromium	ppm	ASTM D5185m >5	0	---
Nickel	ppm	ASTM D5185m >5	0	---
Titanium	ppm	ASTM D5185m	0	---
Silver	ppm	ASTM D5185m >5	<1	---
Aluminum	ppm	ASTM D5185m >50	2	---
Lead	ppm	ASTM D5185m >50	<1	---
Copper	ppm	ASTM D5185m >225	4	---
Tin	ppm	ASTM D5185m >10	0	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 6	<1	---
Barium	ppm	ASTM D5185m 0	0	---
Molybdenum	ppm	ASTM D5185m 0	0	---
Manganese	ppm	ASTM D5185m	<1	---
Magnesium	ppm	ASTM D5185m 145	88	---
Calcium	ppm	ASTM D5185m 3570	3211	---
Phosphorus	ppm	ASTM D5185m 1290	1051	---
Zinc	ppm	ASTM D5185m 1640	1281	---
Sulfur	ppm	ASTM D5185m	3665	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	▲ 23	---
Sodium	ppm	ASTM D5185m	21	---
Potassium	ppm	ASTM D5185m >20	<1	---

VISUAL


method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	---
Debris	scalar	*Visual NONE	LIGHT	---
Sand/Dirt	scalar	*Visual NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	---
Emulsified Water	scalar	*Visual >0.1	NEG	---
Free Water	scalar	*Visual	NEG	---

FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 57.0	43.2	---

OIL ANALYSIS REPORT


▲ Silicon (ppm)

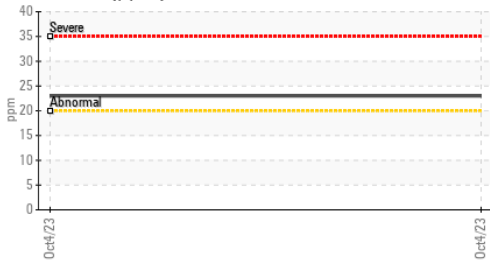


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS


Viscosity @ 40°C

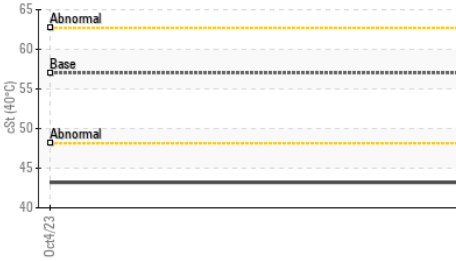


Iron (ppm)

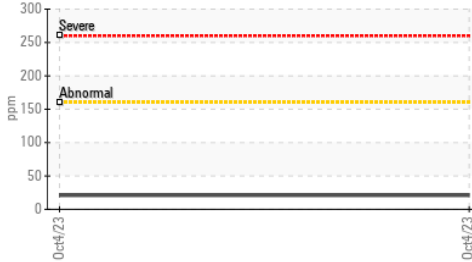


Lead (ppm)

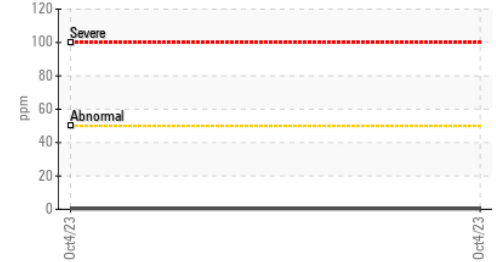


Aluminum (ppm)

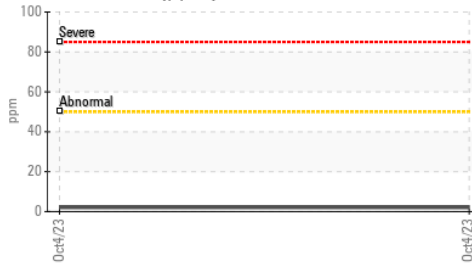


Chromium (ppm)

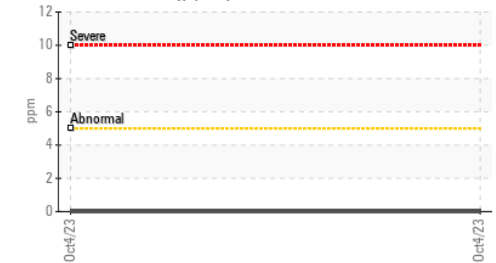

Copper (ppm)

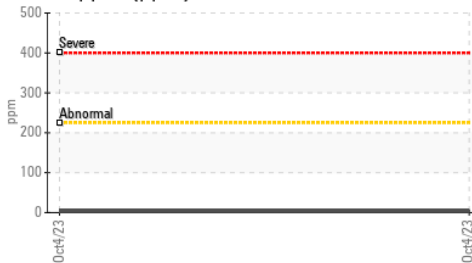


▲ Silicon (ppm)

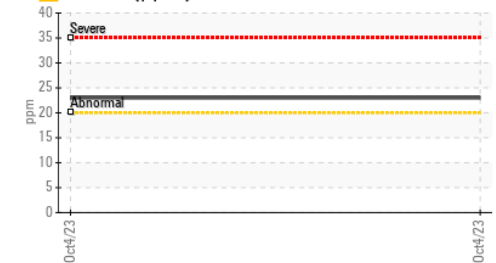

Viscosity @ 40°C



Additives

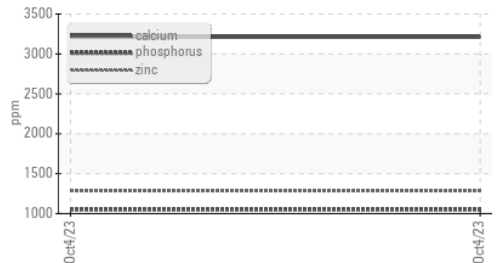

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0096417 Received : 09 Oct 2023
 Lab Number : 05973457 Diagnosed : 11 Oct 2023
 Unique Number : 10685407 Diagnostician : Jonathan Hester
 Test Package : MOB 1

CENTRAL VALLEY AG
 5707 LANGWORTH
 OAKDALE, CA
 US 95361
 Contact: LAB TECH
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: