




# OIL ANALYSIS REPORT

Sample Rating Trend

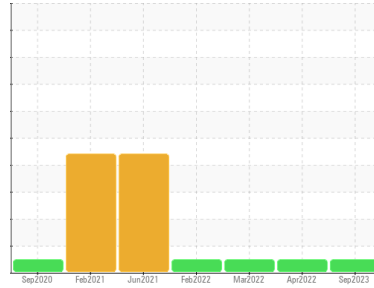

**NORMAL**



Area  
**(P692450)**  
Machine Id  
**710000**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0082191</b>	GFL0049270	GFL05503452
Sample Date	Client Info	<b>27 Sep 2023</b>	07 Apr 2022	11 Mar 2022
Machine Age	hrs	<b>10476</b>	6203	5983
Oil Age	hrs	<b>10476</b>	6203	0
Oil Changed	Client Info	<b>Changed</b>	Changed	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>9</b>	12	7
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	4	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>2</b>	4	3
Tin	ppm ASTM D5185m >15	<b>0</b>	1	0
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>12</b>	8	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>65</b>	57	52
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>860</b>	920	853
Calcium	ppm ASTM D5185m 1070	<b>1105</b>	1173	1117
Phosphorus	ppm ASTM D5185m 1150	<b>945</b>	1055	977
Zinc	ppm ASTM D5185m 1270	<b>1174</b>	1217	1110
Sulfur	ppm ASTM D5185m 2060	<b>2959</b>	2740	2492

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	3
Sodium	ppm ASTM D5185m	<b>2</b>	4	3
Potassium	ppm ASTM D5185m >20	<b>1</b>	6	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.4	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	8.6	7.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.5</b>	20.0	19.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.5</b>	16.2	15.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.1</b>	9.3	9.9








# OIL ANALYSIS REPORT

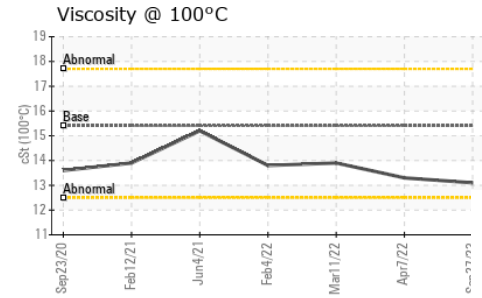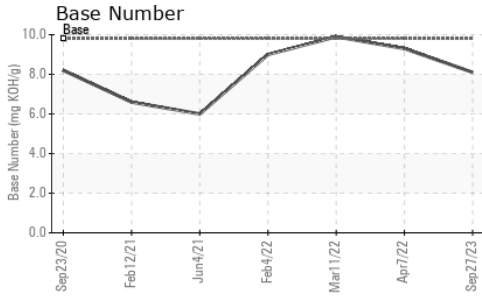

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	13.3	13.9

## GRAPHS

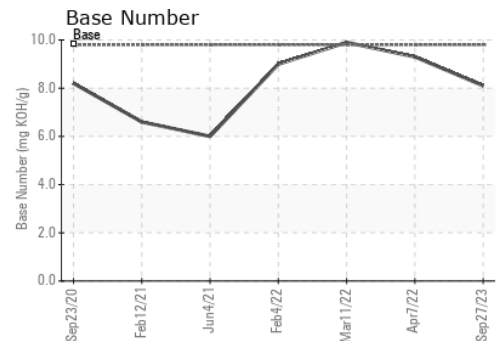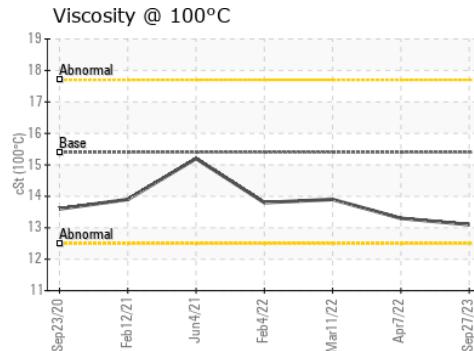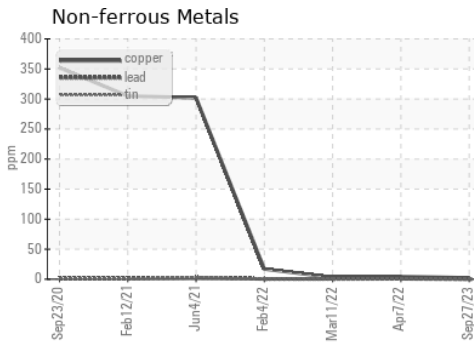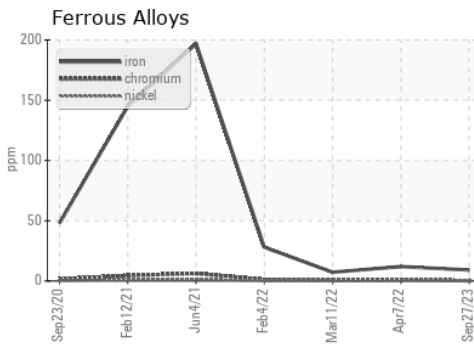

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0082191  
**Lab Number** : 05975440  
**Unique Number** : 10687390  
**Test Package** : FLEET

**Received** : 11 Oct 2023  
**Tested** : 12 Oct 2023  
**Diagnosed** : 12 Oct 2023 - Wes Davis

**GFL Environmental - 015 - Columbia**  
 7800 Farrow Road  
 Columbia, SC  
 US 29203-3219  
 Contact: NOEL MATTHEWS  
 nmatthewsjr@gflenv.com  
 T: (803)935-0249  
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)