


PROBLEM SUMMARY

Sample Rating Trend




ISO

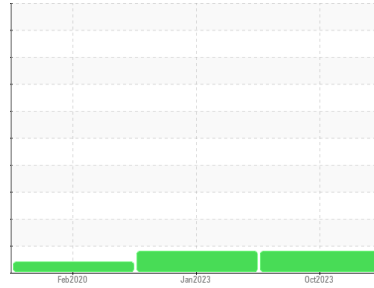

Machine Id
815
 Component
Hydraulic System
 Fluid
SHELL TELLUS S2 MX 46 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

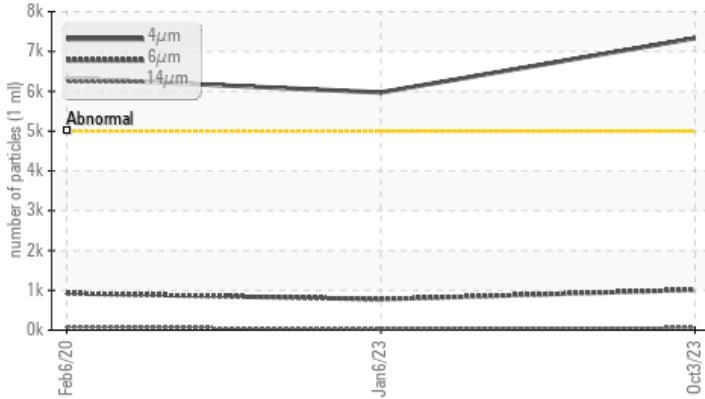

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | ATTENTION | ATTENTION | ATTENTION |
|-----------------|------------------------|------------|------------|------------|
| Particles >4µm | ASTM D7647 >5000 | ▲ 7334 | ▲ 5970 | ▲ 6324 |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | ▲ 20/17/13 | ▲ 20/17/12 | ▲ 20/17/13 |

Customer Id: AISCRO
 Sample No.: PCA0108018
 Lab Number: 05975709
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

06 Jan 2023 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



06 Feb 2020 Diag: Doug Bogart

ISO




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Machine Id
815
Component
Hydraulic System
Fluid
SHELL TELLUS S2 MX 46 (--- GAL)

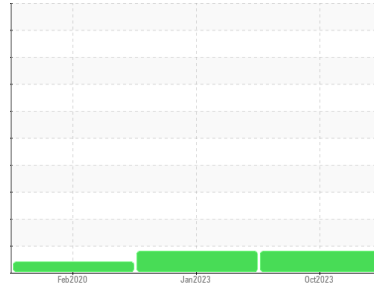

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PCA0108018 | PCA0090066 | PCA0015671 |
| Sample Date | Client Info | | 03 Oct 2023 | 06 Jan 2023 | 06 Feb 2020 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ATTENTION | ATTENTION | ATTENTION |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 0 | 0 | 1 |
| Chromium | ppm | ASTM D5185m >20 | <1 | <1 | 1 |
| Nickel | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m >20 | <1 | <1 | 3 |
| Tin | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Antimony | ppm | ASTM D5185m | --- | --- | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-----------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m 0 | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m 70 | 3 | <1 | 16 |
| Calcium | ppm | ASTM D5185m 10 | 37 | 39 | 56 |
| Phosphorus | ppm | ASTM D5185m 300 | 265 | 279 | 261 |
| Zinc | ppm | ASTM D5185m 325 | 322 | 323 | 283 |
| Sulfur | ppm | ASTM D5185m 665 | 841 | 1030 | 2029 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >15 | 0 | <1 | <1 |
| Sodium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 0 | 0 |

FLUID CLEANLINESS


| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|------------|------------|
| Particles >4µm | ASTM D7647 | >5000 | ▲ 7334 | ▲ 5970 | ▲ 6324 |
| Particles >6µm | ASTM D7647 | >1300 | 1014 | 775 | 924 |
| Particles >14µm | ASTM D7647 | >160 | 59 | 40 | 72 |
| Particles >21µm | ASTM D7647 | >40 | 22 | 15 | 21 |
| Particles >38µm | ASTM D7647 | >10 | 3 | 4 | 5 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 3 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | ▲ 20/17/13 | ▲ 20/17/12 | ▲ 20/17/13 |

FLUID DEGRADATION


| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.35 | 0.28 | 0.32 | 0.204 |

OIL ANALYSIS REPORT


▲ Particle Trend

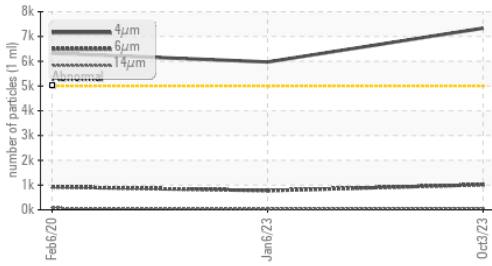


▲ Particle Trend

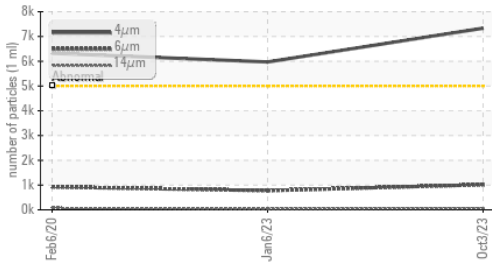

Acid Number

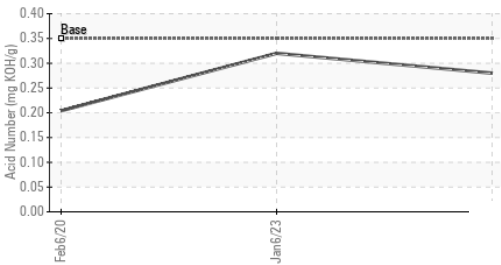


Viscosity @ 40°C

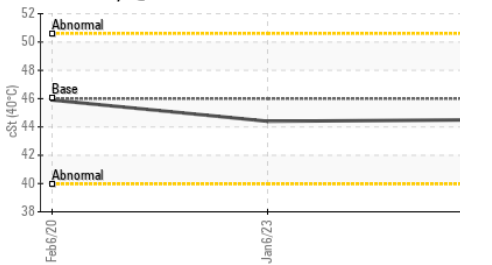

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 40°C | cSt | ASTM D445 | 46.0 | 44.5 | 44.4 | 45.9 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

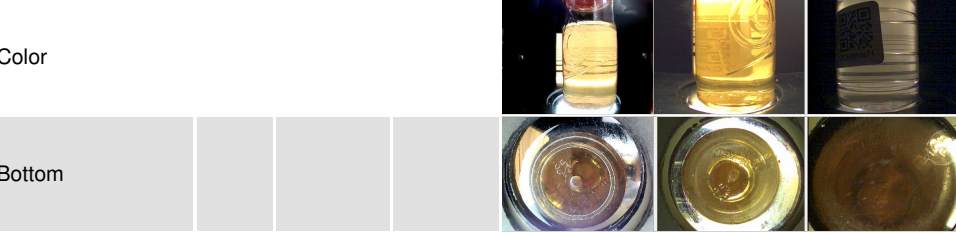


GRAPHS


Ferrous Alloys

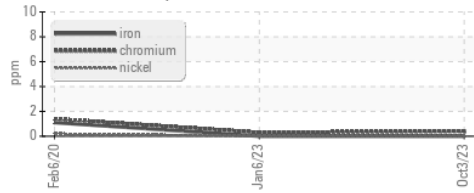


Non-ferrous Metals

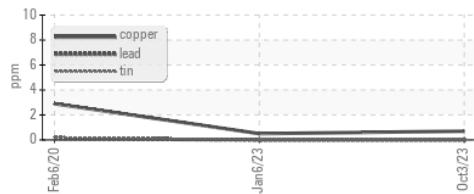


Viscosity @ 40°C

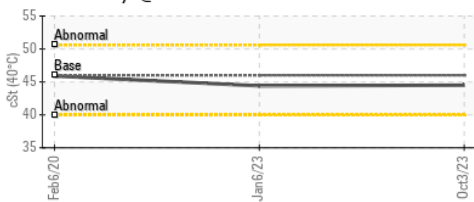

▲ Particle Count

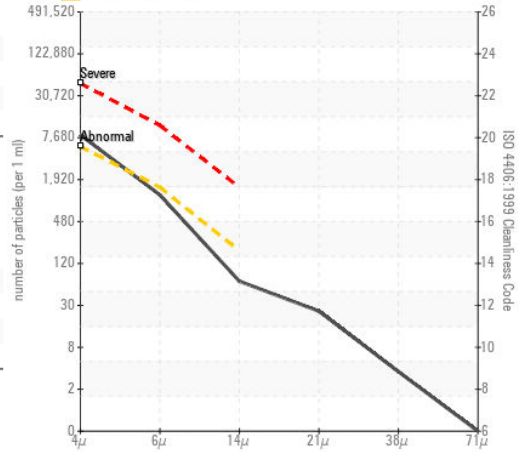

Acid Number

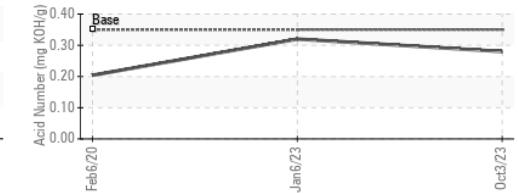

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108018 **Received** : 11 Oct 2023
Lab Number : 05975709 **Diagnosed** : 13 Oct 2023
Unique Number : 10687659 **Diagnostician** : Don Baldrige
Test Package : IND 2

AISIN CHEMICAL
 1004 INDUSTRIAL WAY
 CROTHERSVILLE, IN
 US 47229
 Contact: AL TANNER
 atanner@aisinchemin.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: