




PROBLEM SUMMARY

Sample Rating Trend

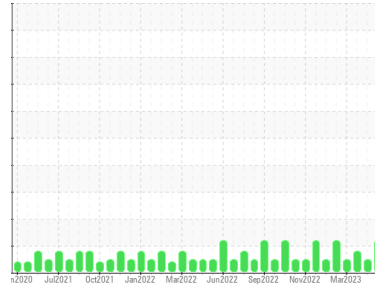


ISO



Area
NAT CUTS [98419641 BEFORE]
Machine Id
LINE 2 CUBER
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

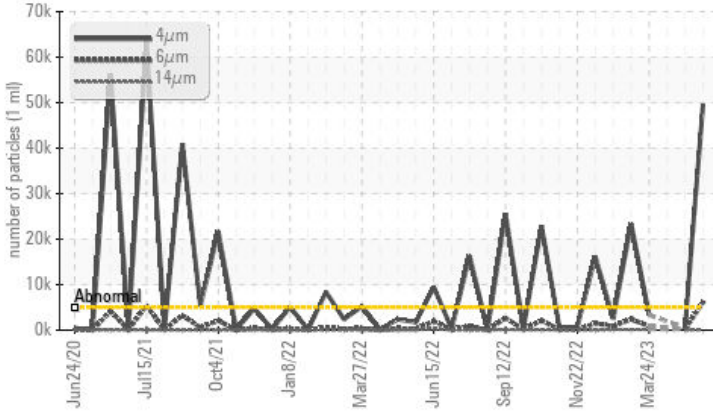

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>5000	▲ 49639	504	---
Particles >6µm	ASTM D7647	>1300	▲ 6152	228	---
Oil Cleanliness	ISO 4406 (c)	>19/17/15	▲ 23/20/14	16/15/13	---

Customer Id: KRASPRMO
Sample No.: PCA0101630
Lab Number: 05977051
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

11 Aug 2023 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



09 Aug 2023 Diag: Angela Borella

SEDIMENT



We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. There is a moderate amount of visible silt present in the sample. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



24 Mar 2023 Diag: Don Baldrige

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area
NAT CUTS [98419641 BEFORE]
 Machine Id
LINE 2 CUBER
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

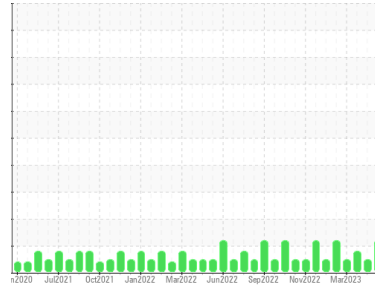

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0101630	PCA0100106	PCA0100107
Sample Date	Client Info	26 Sep 2023	11 Aug 2023	09 Aug 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	NORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	6	6	6
Chromium ppm	ASTM D5185m >20	<1	1	1
Nickel ppm	ASTM D5185m >20	0	0	0
Titanium ppm	ASTM D5185m	0	<1	<1
Silver ppm	ASTM D5185m	0	0	0
Aluminum ppm	ASTM D5185m >20	0	0	0
Lead ppm	ASTM D5185m >20	0	<1	0
Copper ppm	ASTM D5185m >20	8	6	8
Tin ppm	ASTM D5185m >20	0	<1	0
Vanadium ppm	ASTM D5185m	0	<1	<1
Cadmium ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 5	0	0	0
Barium ppm	ASTM D5185m 5	0	0	0
Molybdenum ppm	ASTM D5185m 5	0	0	0
Manganese ppm	ASTM D5185m	0	0	0
Magnesium ppm	ASTM D5185m 25	0	0	0
Calcium ppm	ASTM D5185m 200	0	0	0
Phosphorus ppm	ASTM D5185m 300	344	344	334
Zinc ppm	ASTM D5185m 370	13	21	19
Sulfur ppm	ASTM D5185m 2500	711	863	848

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	3	3	3
Sodium ppm	ASTM D5185m	0	<1	<1
Potassium ppm	ASTM D5185m >20	<1	0	0

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 49639	504	---
Particles >6µm	ASTM D7647 >1300	▲ 6152	228	---
Particles >14µm	ASTM D7647 >320	81	58	---
Particles >21µm	ASTM D7647 >80	13	12	---
Particles >38µm	ASTM D7647 >20	1	1	---
Particles >71µm	ASTM D7647 >4	1	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/15	▲ 23/20/14	16/15/13	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.57	0.19	0.20	0.21

OIL ANALYSIS REPORT


▲ Particle Trend

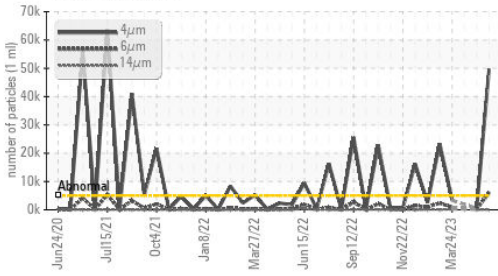


▲ Particle Trend

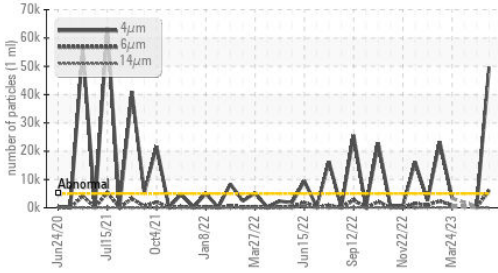

Acid Number

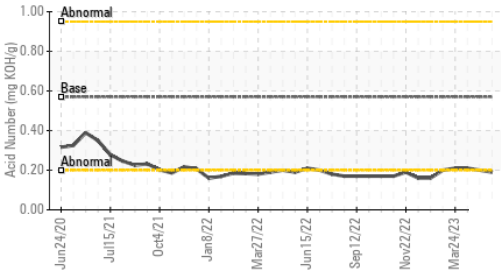


Viscosity @ 40°C

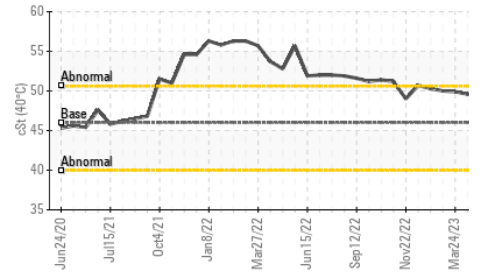

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	▲ MODER
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	49.4	49.5	49.6

SAMPLE IMAGES

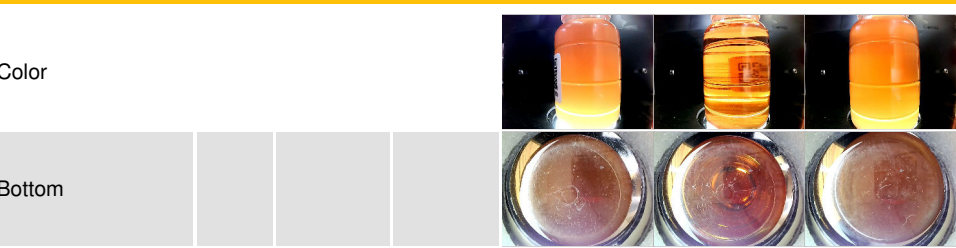


GRAPHS


Ferrous Alloys

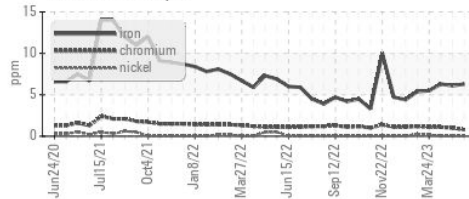


Non-ferrous Metals

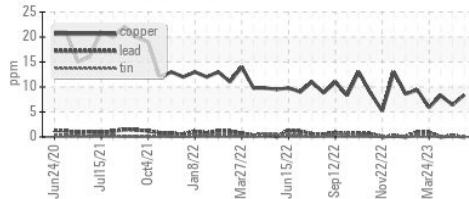


Viscosity @ 40°C

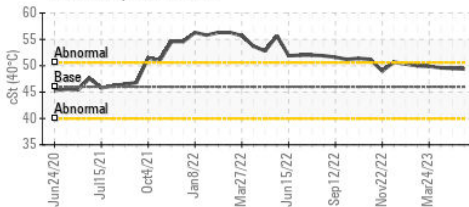

▲ Particle Count

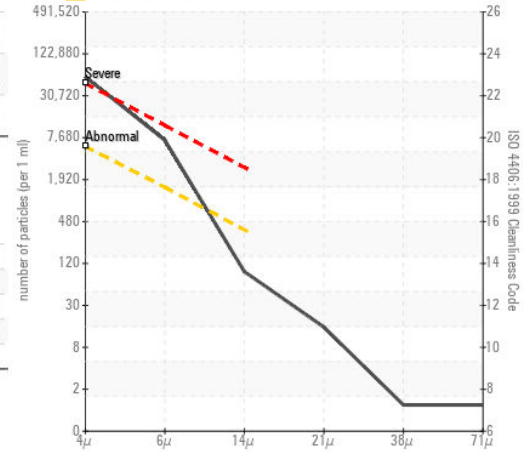

Acid Number

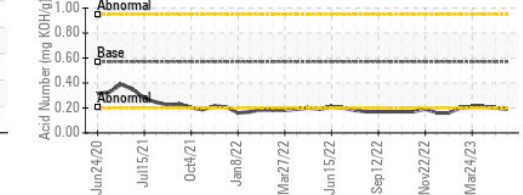

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0101630
Lab Number : 05977051
Unique Number : 10689001
Test Package : IND 2

KraftHeinz - Springfield - Plant 8311 PCA
 2035 E BENNETT
 SPRINGFIELD, MO
 US 65804
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: