


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

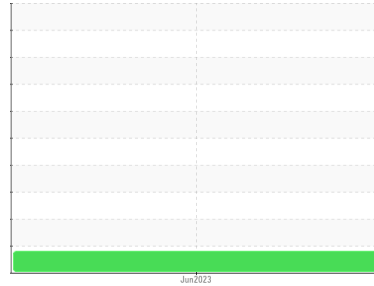

Machine Id
421823

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0091452	---	---
Sample Date	Client Info		26 Jun 2023	---	---
Machine Age	mls	Client Info	119202	---	---
Oil Age	mls	Client Info	119202	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 108	---	---
Chromium	ppm	ASTM D5185m >20	4	---	---
Nickel	ppm	ASTM D5185m >4	1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	39	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	15	---	---
Tin	ppm	ASTM D5185m >15	3	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	12	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 50	63	---	---
Manganese	ppm	ASTM D5185m 0	3	---	---
Magnesium	ppm	ASTM D5185m 950	899	---	---
Calcium	ppm	ASTM D5185m 1050	1346	---	---
Phosphorus	ppm	ASTM D5185m 995	1072	---	---
Zinc	ppm	ASTM D5185m 1180	1297	---	---
Sulfur	ppm	ASTM D5185m 2600	2838	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	64	---	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	17.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	30.0	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	30.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.2	---	---

OIL ANALYSIS REPORT


▲ Ferrous Alloys

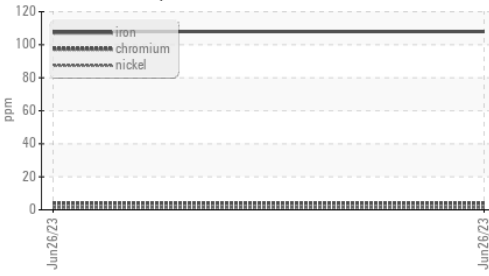


Glycol Contamination

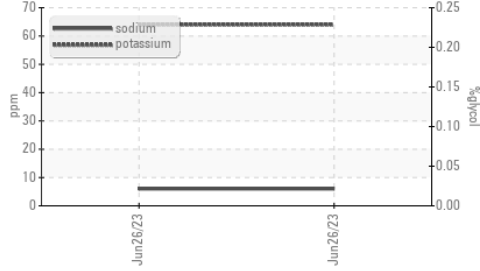


Base Number

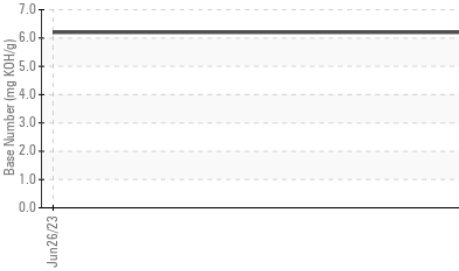

Viscosity @ 100°C

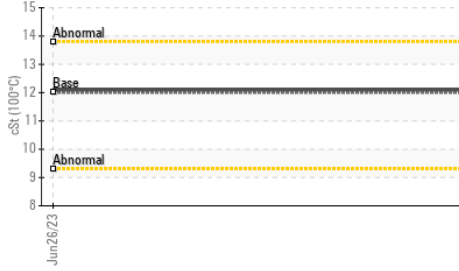

Aluminum (ppm)

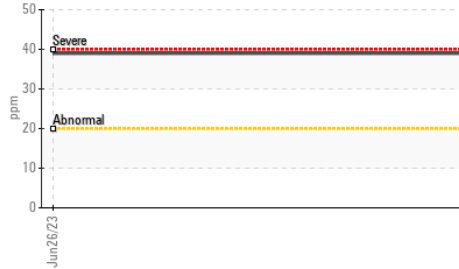


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 12.00	12.1	---	---

GRAPHS

▲ Iron (ppm)

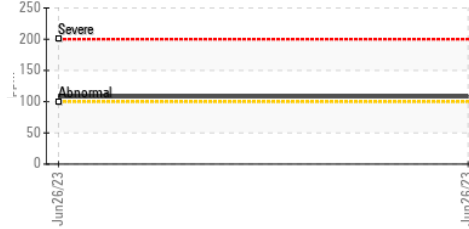


Lead (ppm)

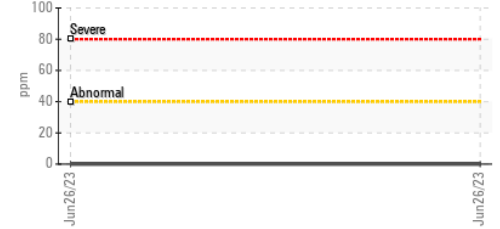


Aluminum (ppm)




Chromium (ppm)

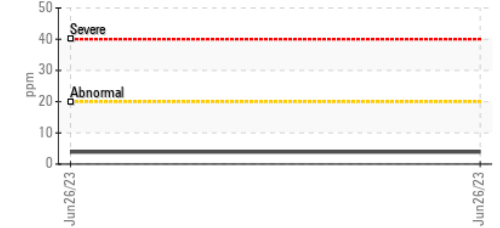

Copper (ppm)

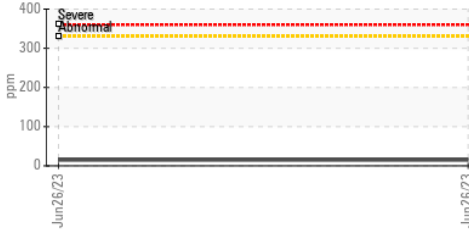


Silicon (ppm)

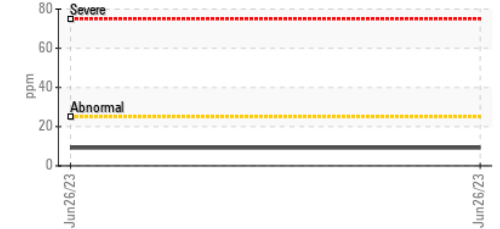

Viscosity @ 100°C



Base Number

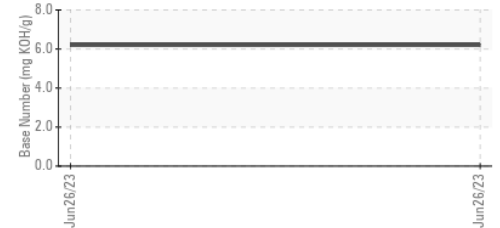

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0091452 **Received** : 13 Oct 2023
Lab Number : 05978158 **Diagnosed** : 16 Oct 2023
Unique Number : 10695453 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #121
 107 HOW LANE
 NEW BRUNSWICK, NJ
 US 08901
 Contact: Anthony Cursi
 acursi@millertransgroup.com
 T: (732)358-4027
 F: (732)400-8475

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)