




# OIL ANALYSIS REPORT

Sample Rating Trend

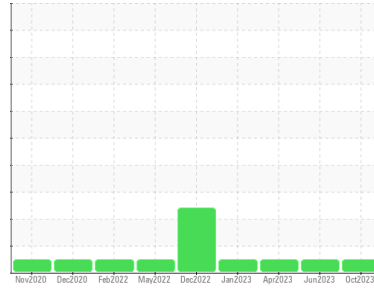

**NORMAL**



Machine Id  
**921062-260379**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0093720</b>	GFL0078550	GFL0078534
Sample Date	Client Info	<b>09 Oct 2023</b>	12 Jun 2023	12 Apr 2023
Machine Age	hrs	<b>7324</b>	6492	6058
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>6</b>	5	7
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>10</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>12</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	63	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>955</b>	1029	963
Calcium	ppm	ASTM D5185m 1070	<b>1039</b>	1200	1077
Phosphorus	ppm	ASTM D5185m 1150	<b>975</b>	1049	1002
Zinc	ppm	ASTM D5185m 1270	<b>1216</b>	1310	1254
Sulfur	ppm	ASTM D5185m 2060	<b>2887</b>	3631	3588

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>3</b>	2	2
Sodium	ppm	ASTM D5185m	<b>22</b>	21	39
Potassium	ppm	ASTM D5185m >20	<b>6</b>	1	<1

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.8</b>	7.3	7.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.9</b>	19.2	17.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	14.1	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.9</b>	8.5	7.5







# OIL ANALYSIS REPORT

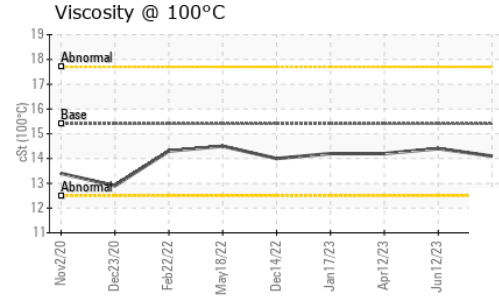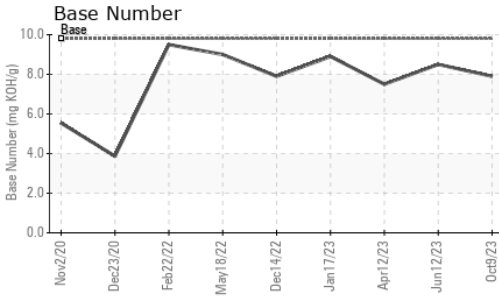

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.4	14.2

## GRAPHS

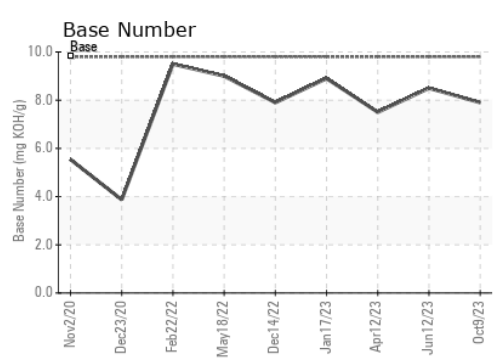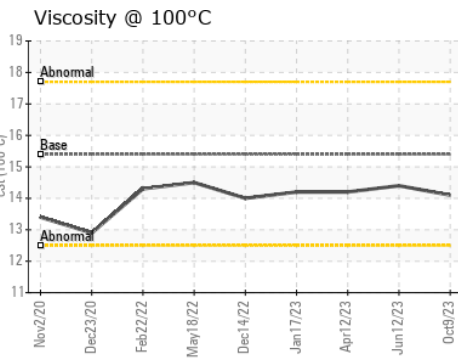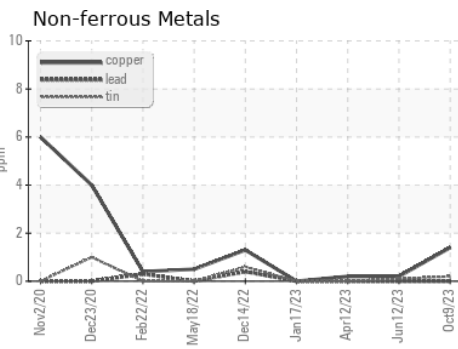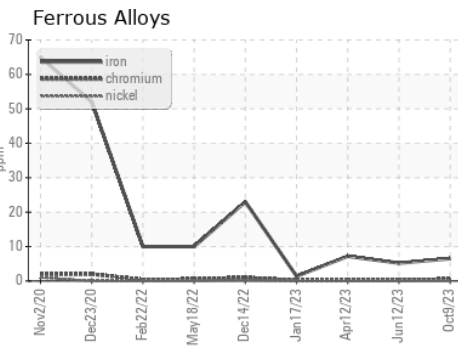

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0093720 **Received** : 13 Oct 2023  
**Lab Number** : **05978674** **Diagnosed** : 16 Oct 2023  
**Unique Number** : 10695969 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: BRYAN SWANSON  
 bryanswanson@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)